

CONNECTORS MANUFACTURER



Board To Board 0.6mm



RoHS




Board To Board Male 0.6mm H=2.1mm

SPECIFICATION

Current Rate:0.4 AMP
 Insulation Resistance:100MΩ Min.
 Contact Resistance:45mΩ Max.
 Dielectric Voltage:300V AC for one minute
 Operation Temperature:-25°C to +85°C



MATERIAL

Insulator:Polyester,UL 94V-0
 ◎Standard:Nylon 6T
 Contact Pin:Phosphor Bronze
 Contact Plating:Gold Plated

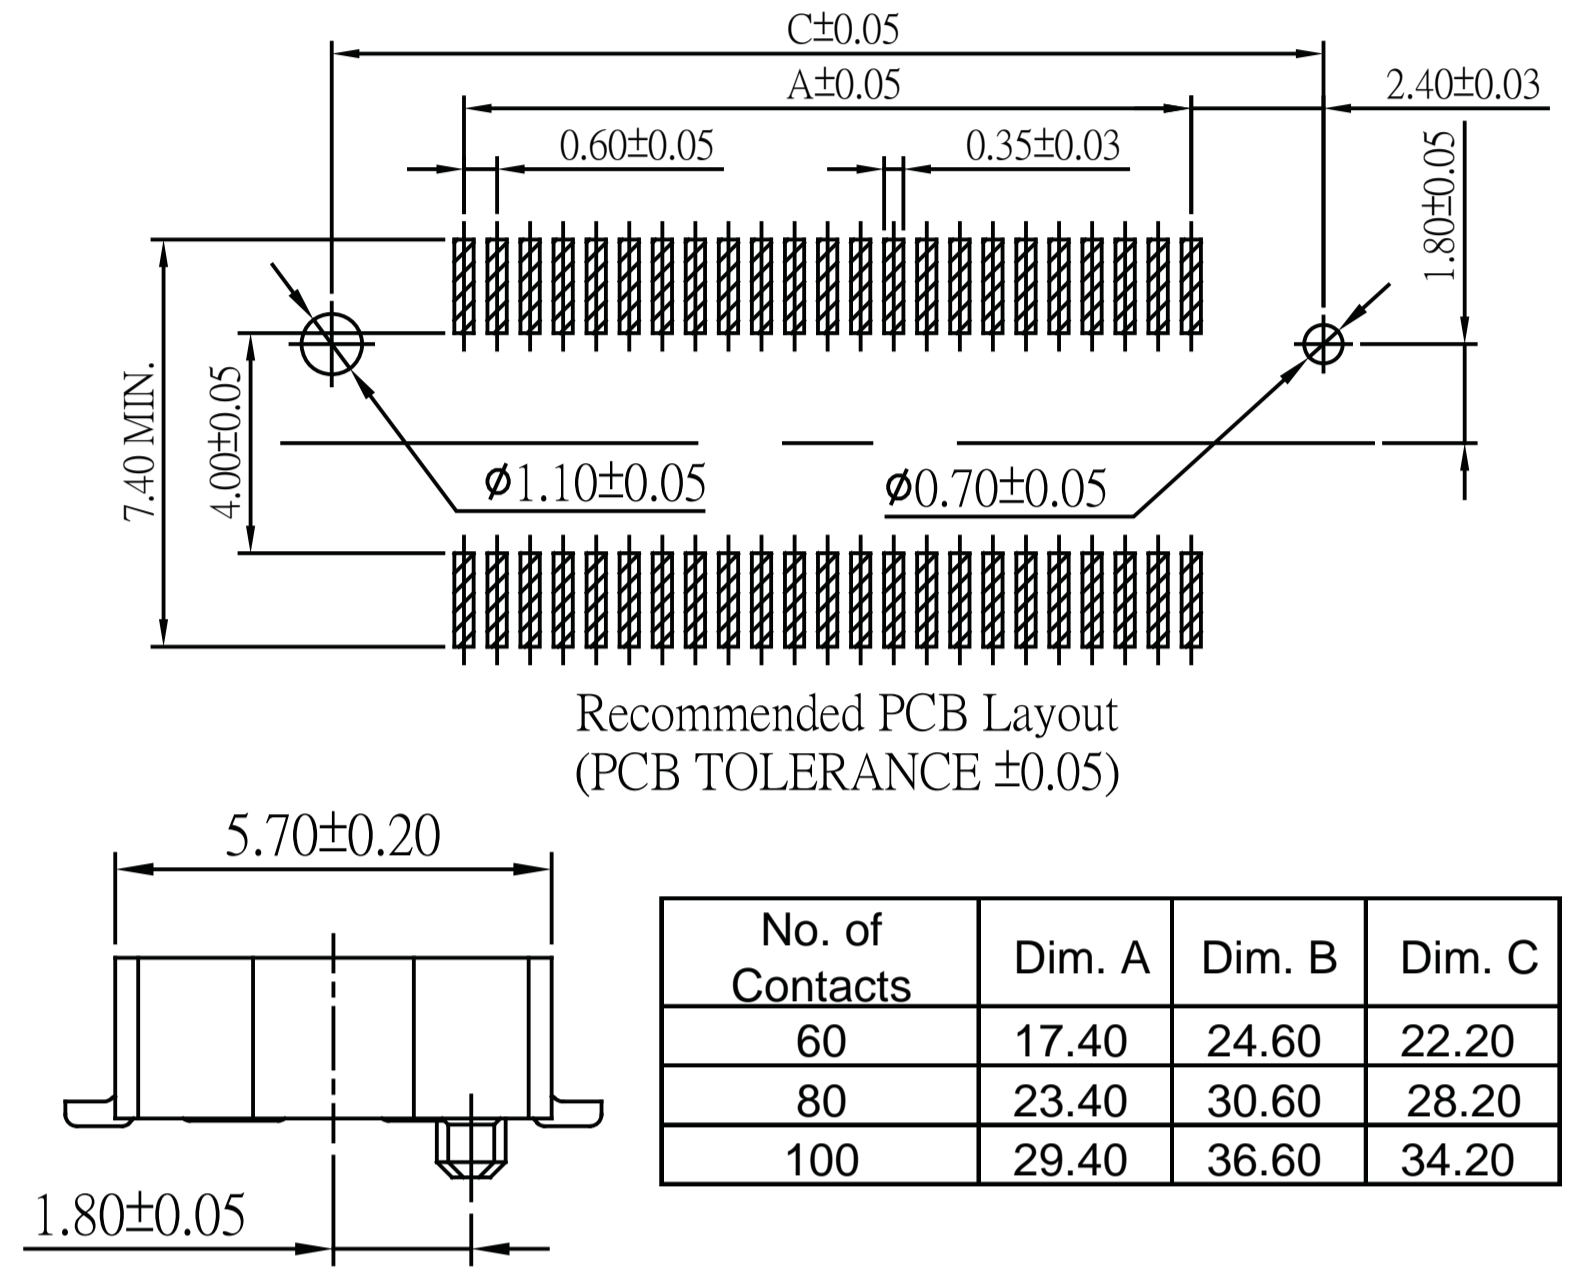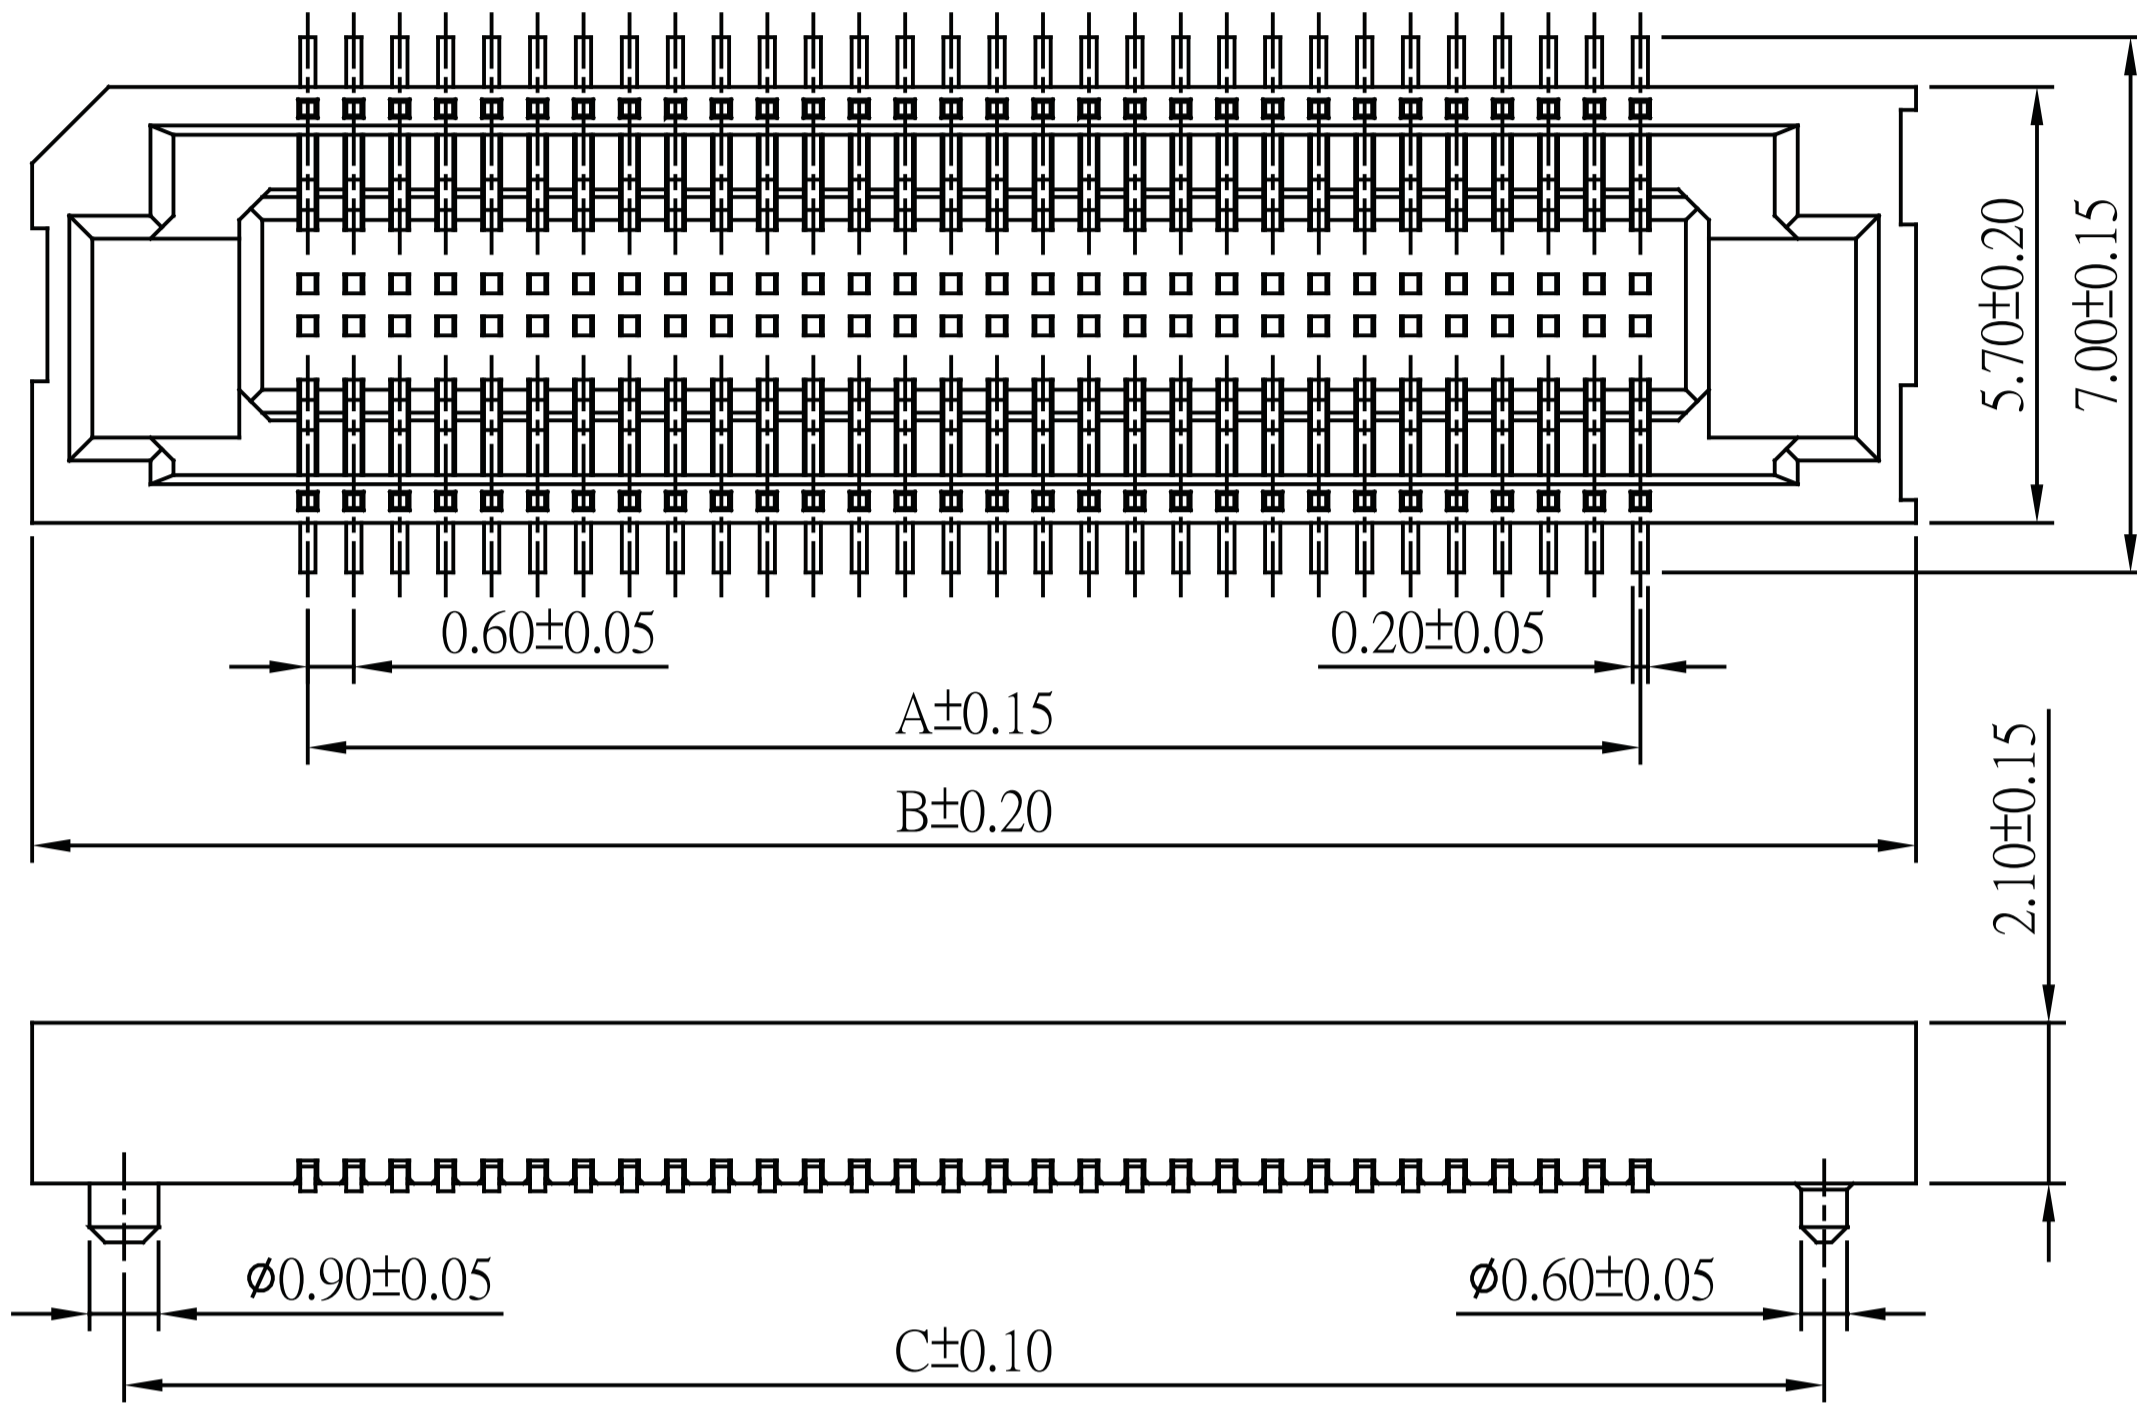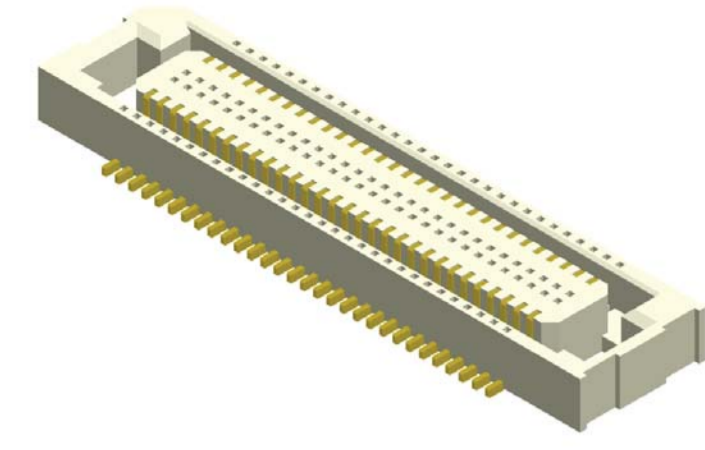

Part No.:BTB06M21-XX-U

Board To Board Female 0.6mm H=2.37mm

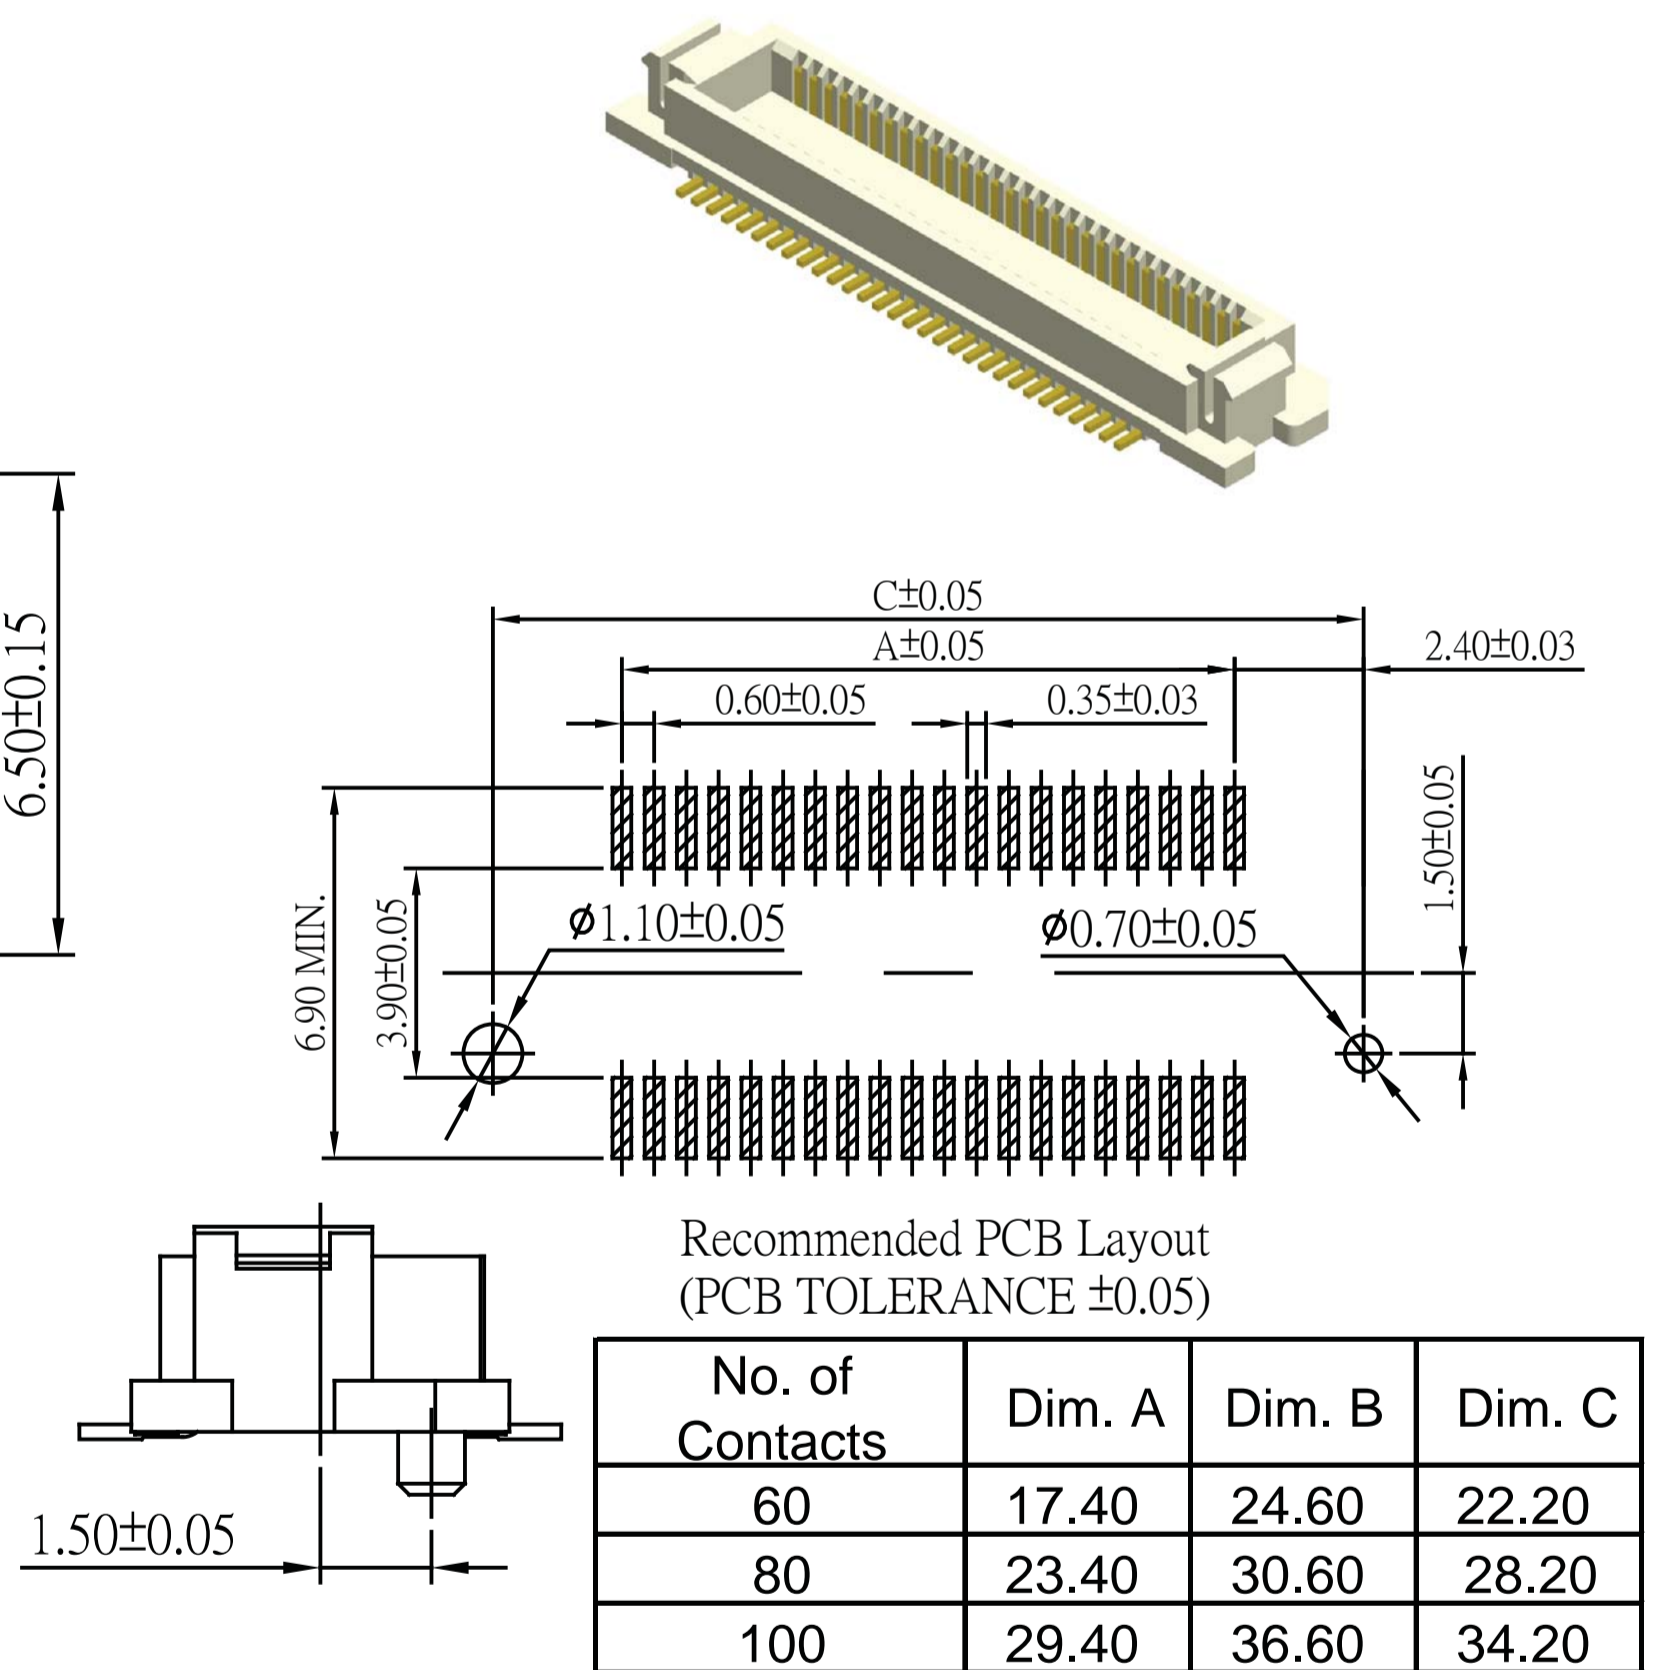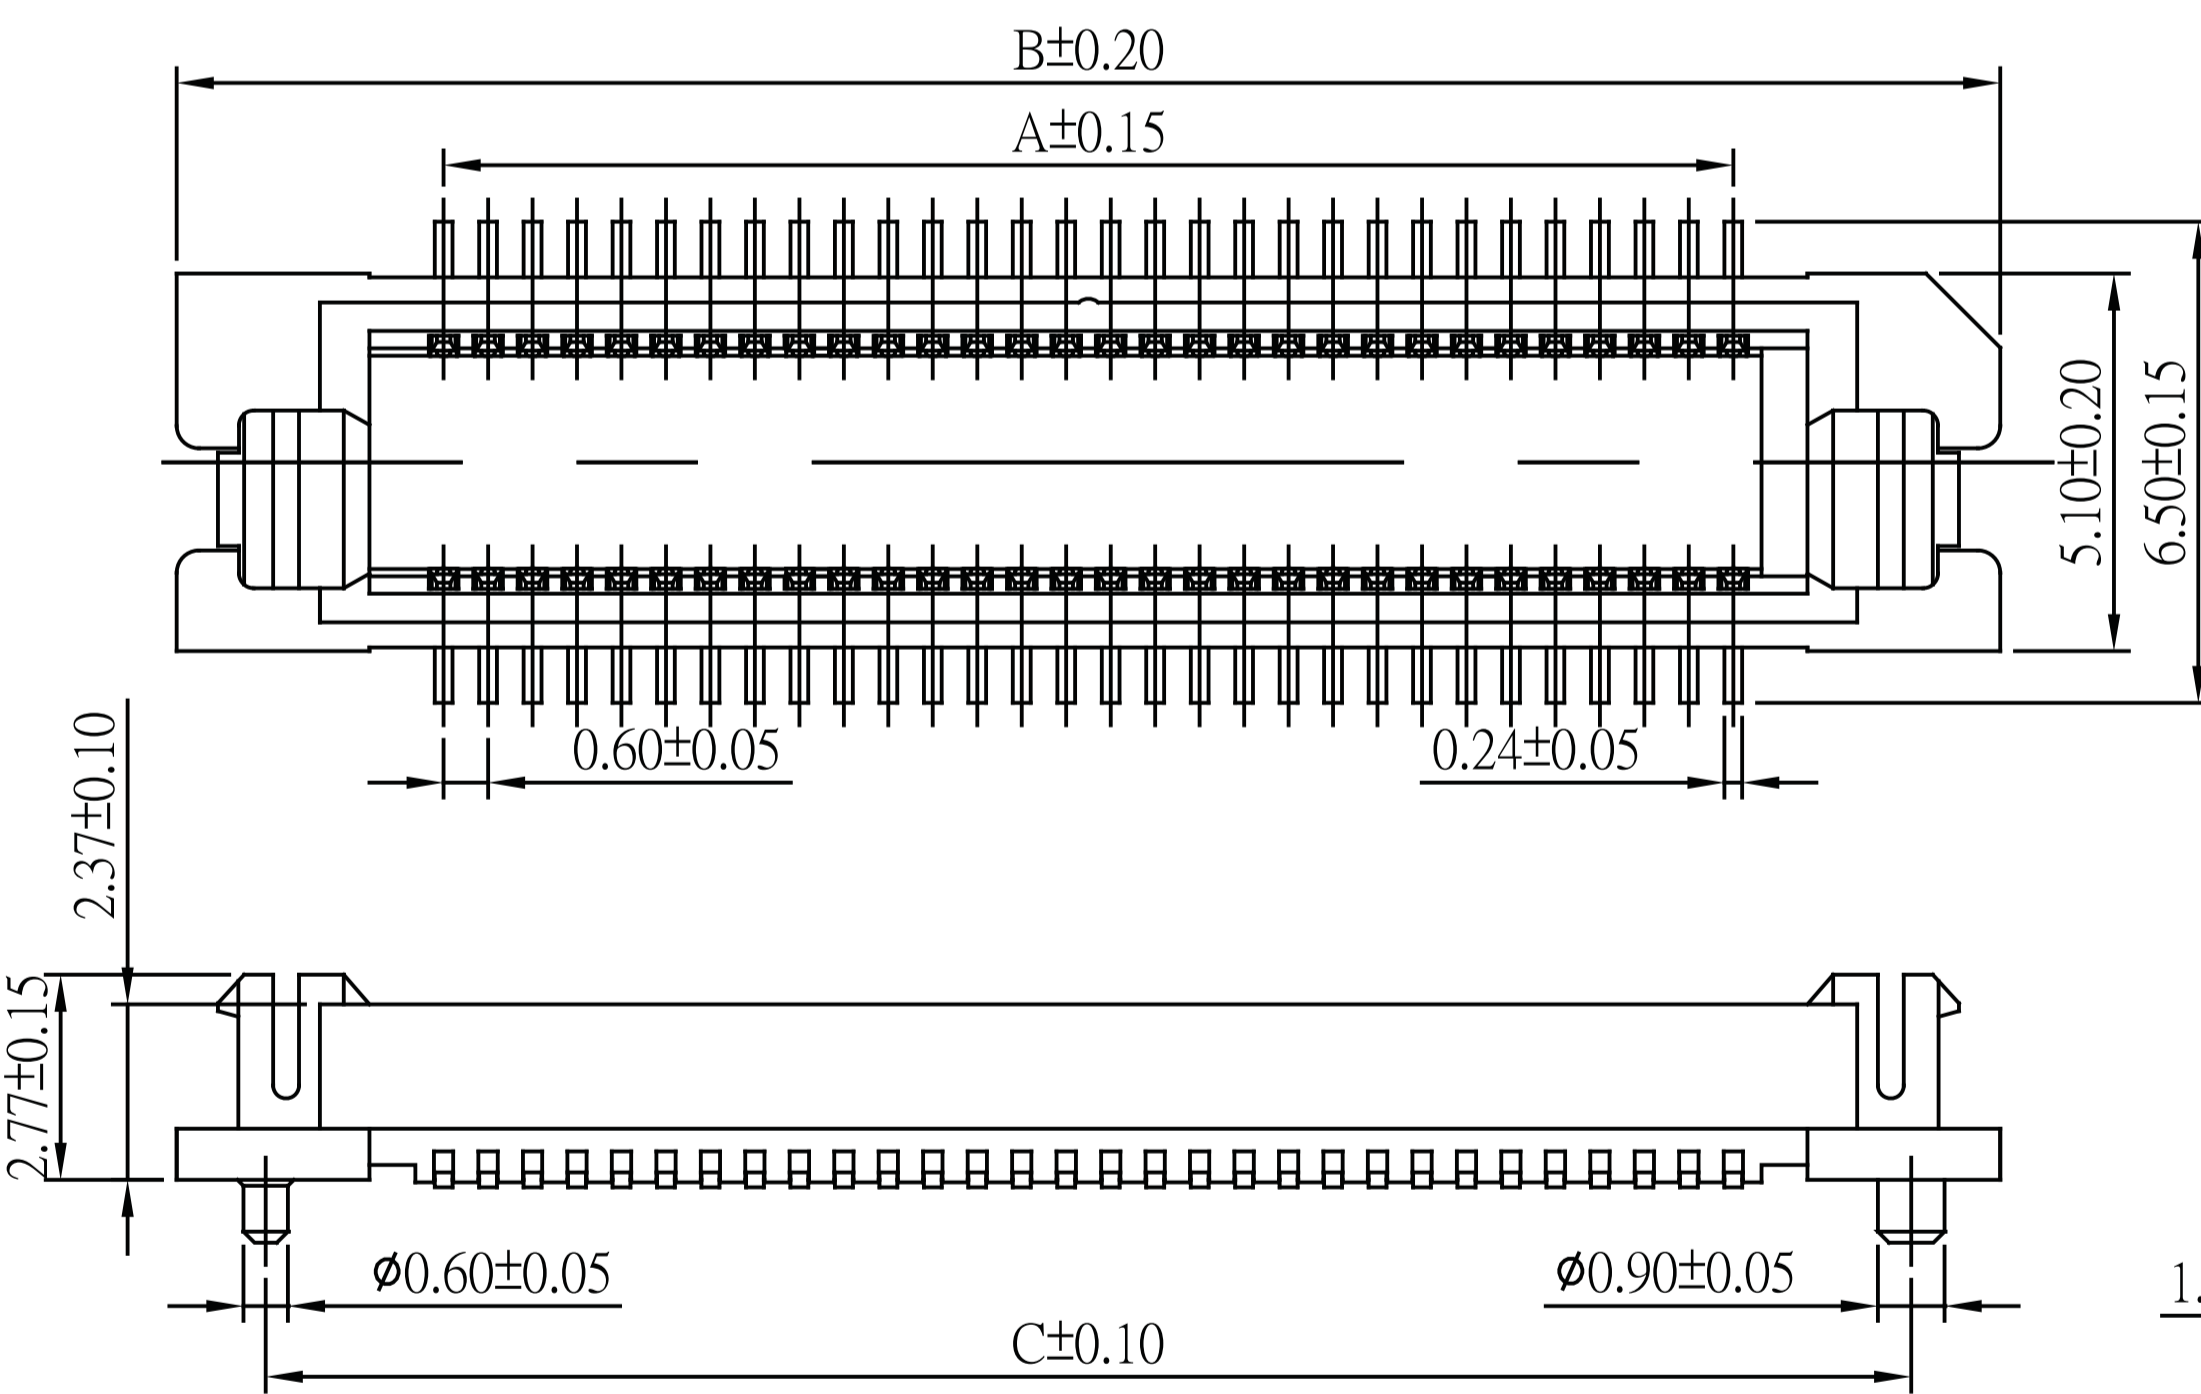

Part No.:BTB06F24-XX-U

ORDER INFORMATION

B **T** **B** **0** **6** **X** **X** **X** - **X** **X** **X** **N** **X** **X** - **U**



Male Insulator Height	Female Insulator Height
21:Insulator Height H=2.1mm	24:Insulator Height H=2.37mm