

# Box Header 2.54mm



RoHS



## Box Header 2.54mm Press Fit Type

### SPECIFICATION


Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C

### MATERIAL

Insulator:Polyester,UL 94V-0  
 ©Standard:PBT  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

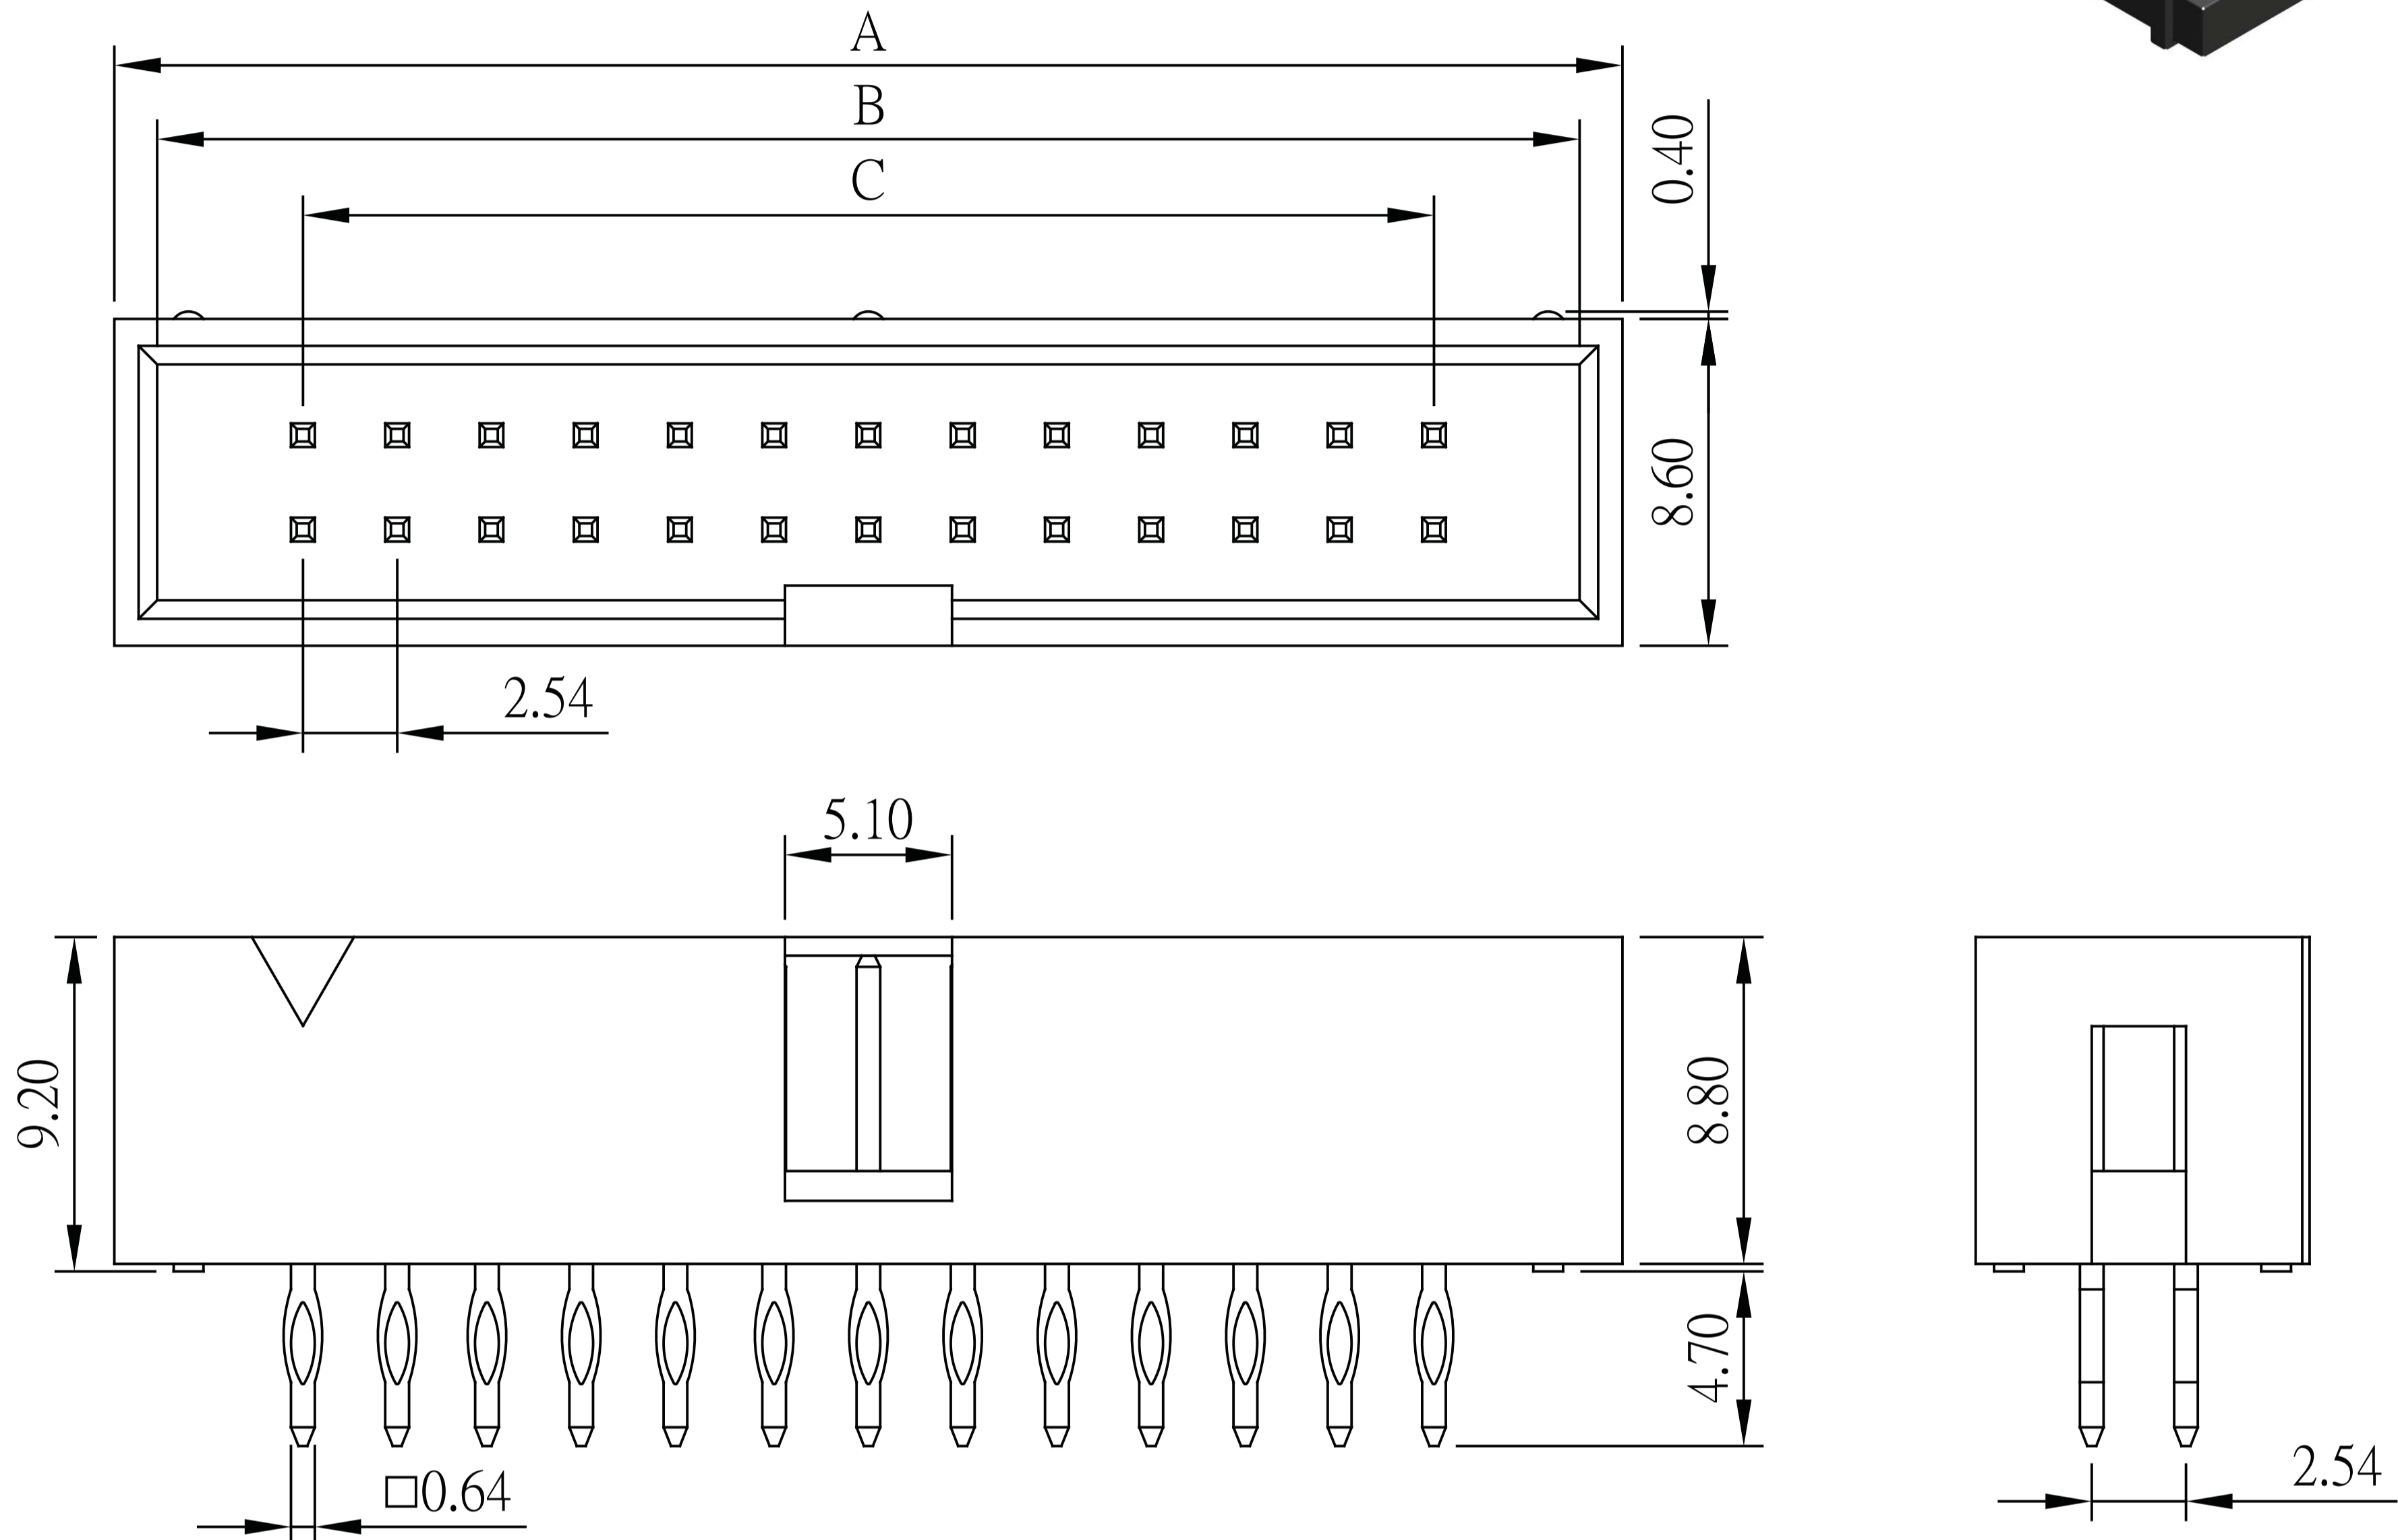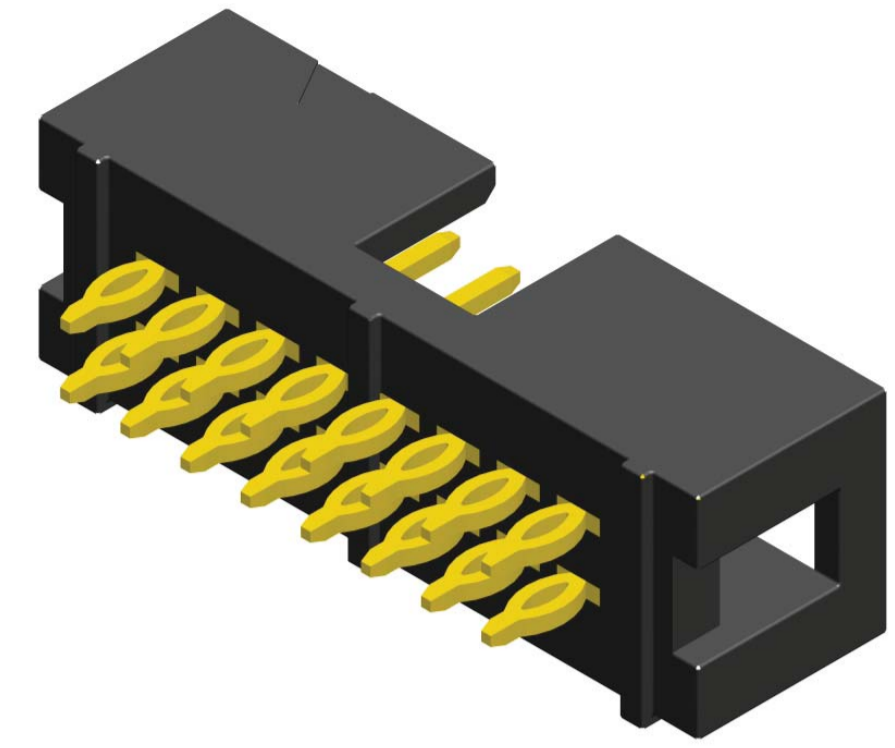

No. of Contacts	Dimensions		
	A	B	C
10	20.34	18.00	10.16
14	25.48	23.18	15.24
16	27.90	25.72	17.78
20	33.05	30.80	22.86
26	40.68	38.42	30.48
34	50.80	48.58	40.64
40	58.46	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	89.10	86.68	78.74

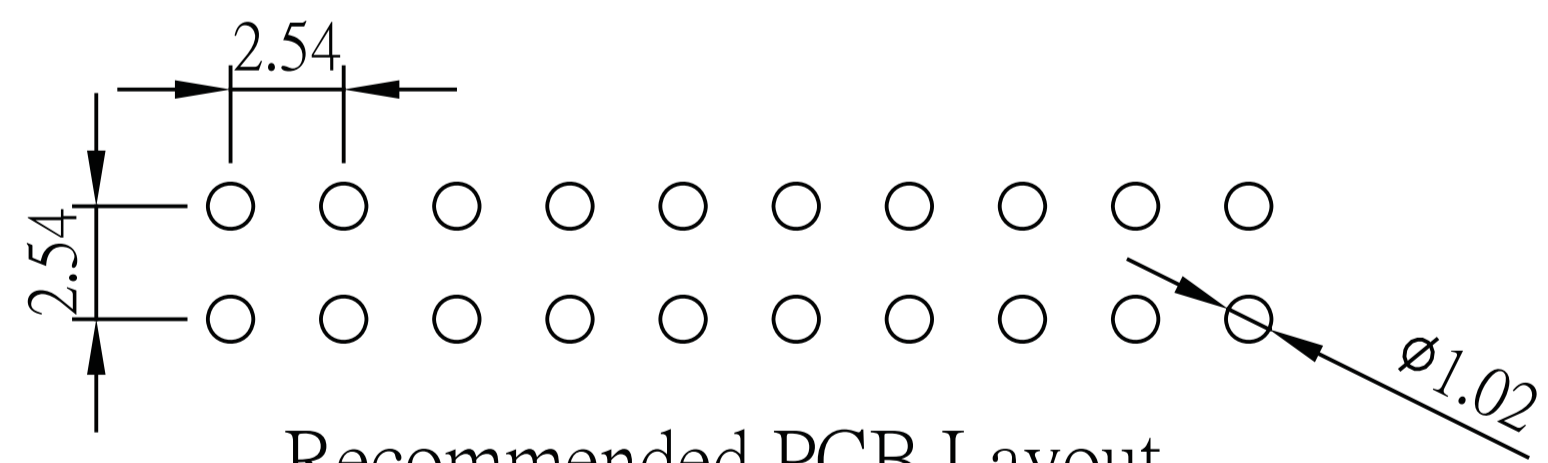

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

## ORDER INFORMATION

