

## Pin Header 3.96mm 1 Row H=3.18mm Right Angle Type

### SPECIFICATION

Current Rate: 7 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C

### MATERIAL

Insulator: Polyester, UL 94V-0  
 ©Standard: LCP  
 Contact Pin: Copper Alloy  
 Contact Plating: Gold Flash all over



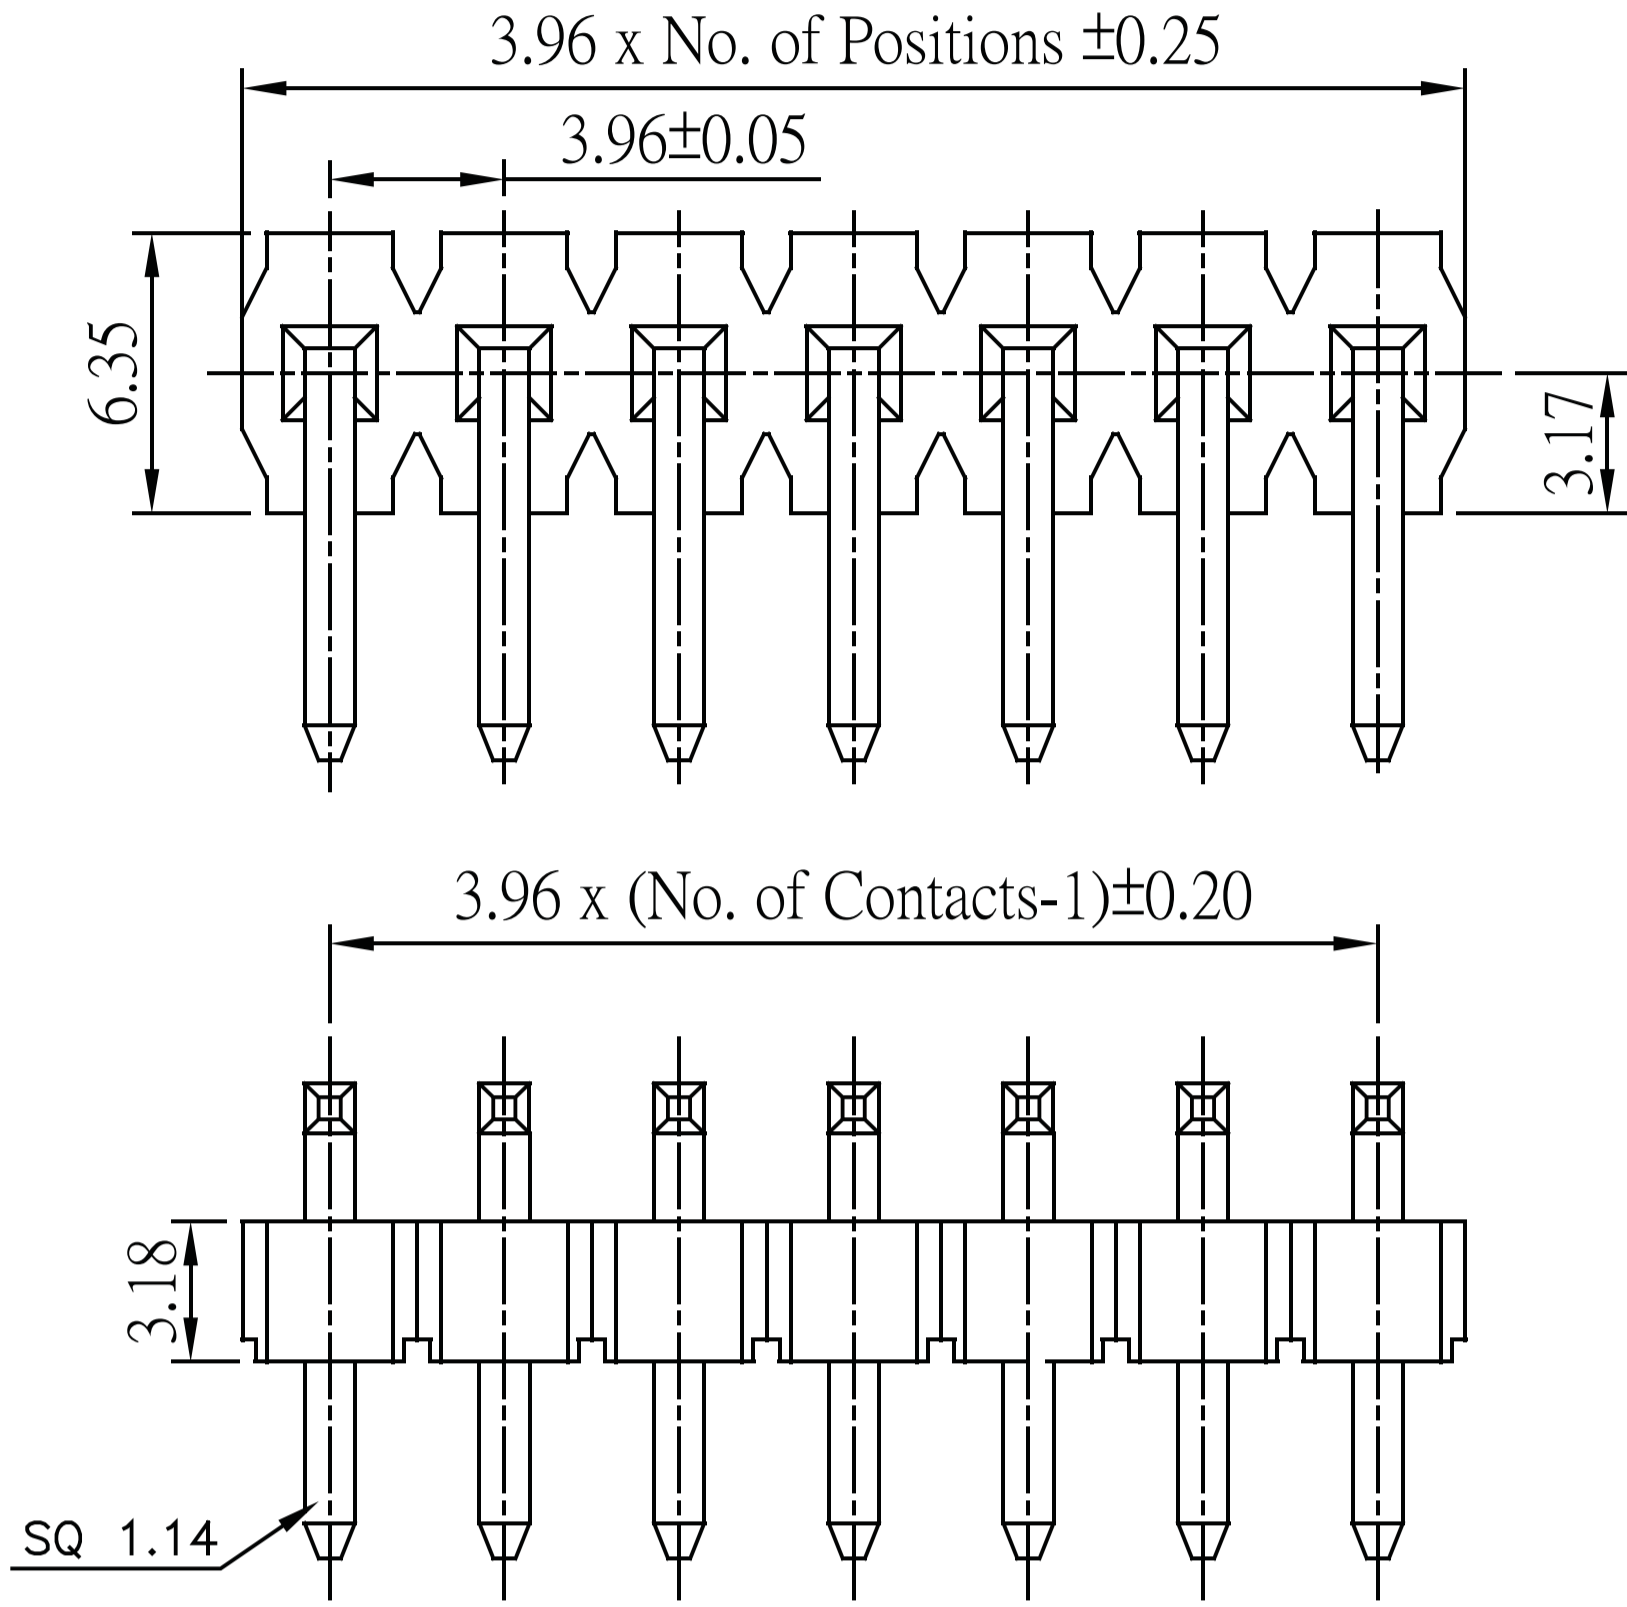


Table:

LEAD STYLE	Dimensions		
	A	B	C
01	8.15	4.45	5.73
02	13.60	4.00	8.13
03	10.75	4.50	9.48

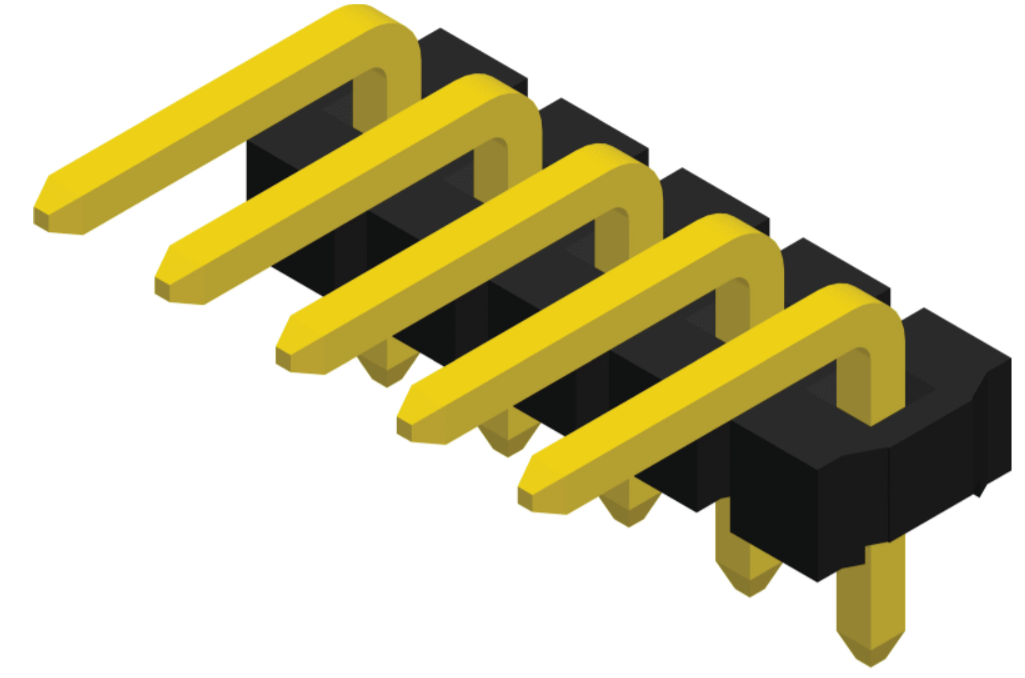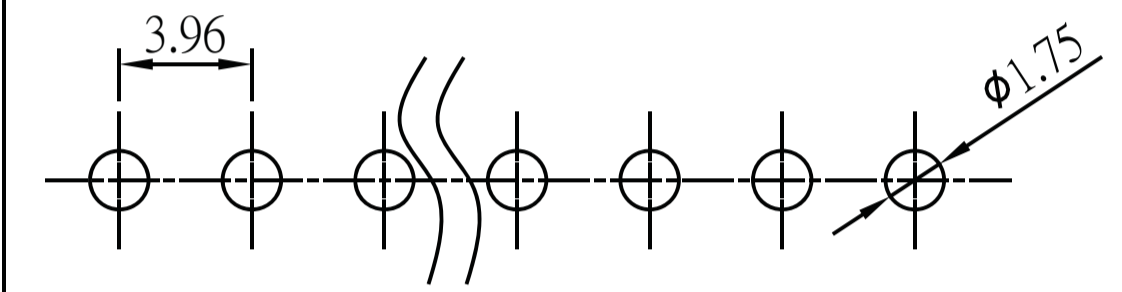

Recommended PCB Layout  
 (PCB TOLERANCE  $\pm 0.05$ )

Part No.: PH396R32-1XX-U

## Pin Header 3.96mm 1 Row H=3.18mm Straight Type



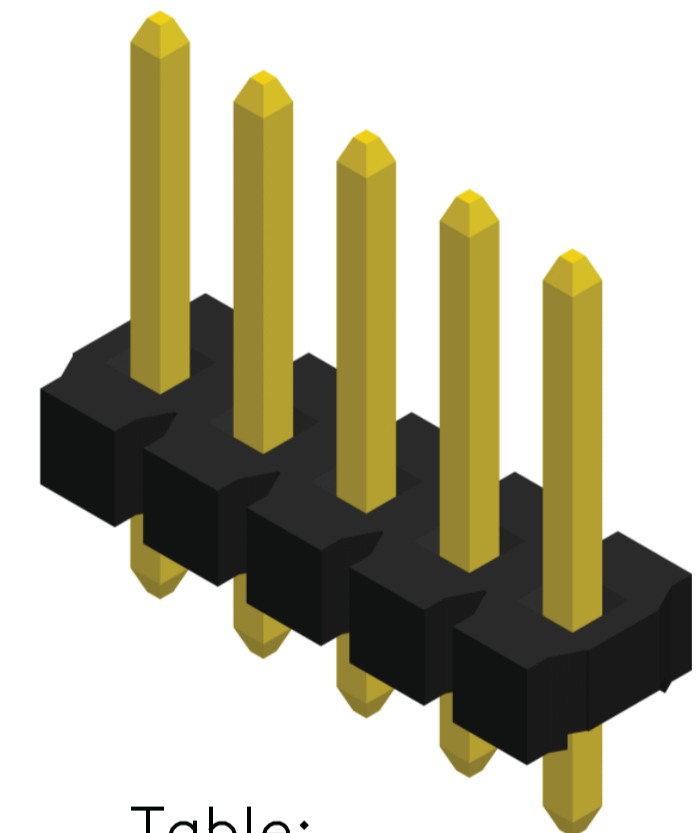


Table:

LEAD STYLE	Dimensions	
	Dim.A	Dim.B
02	11.45	4.45
03	12.70	4.00
04	20.55	4.00
05	3.80	12.10
06	11.43	3.18

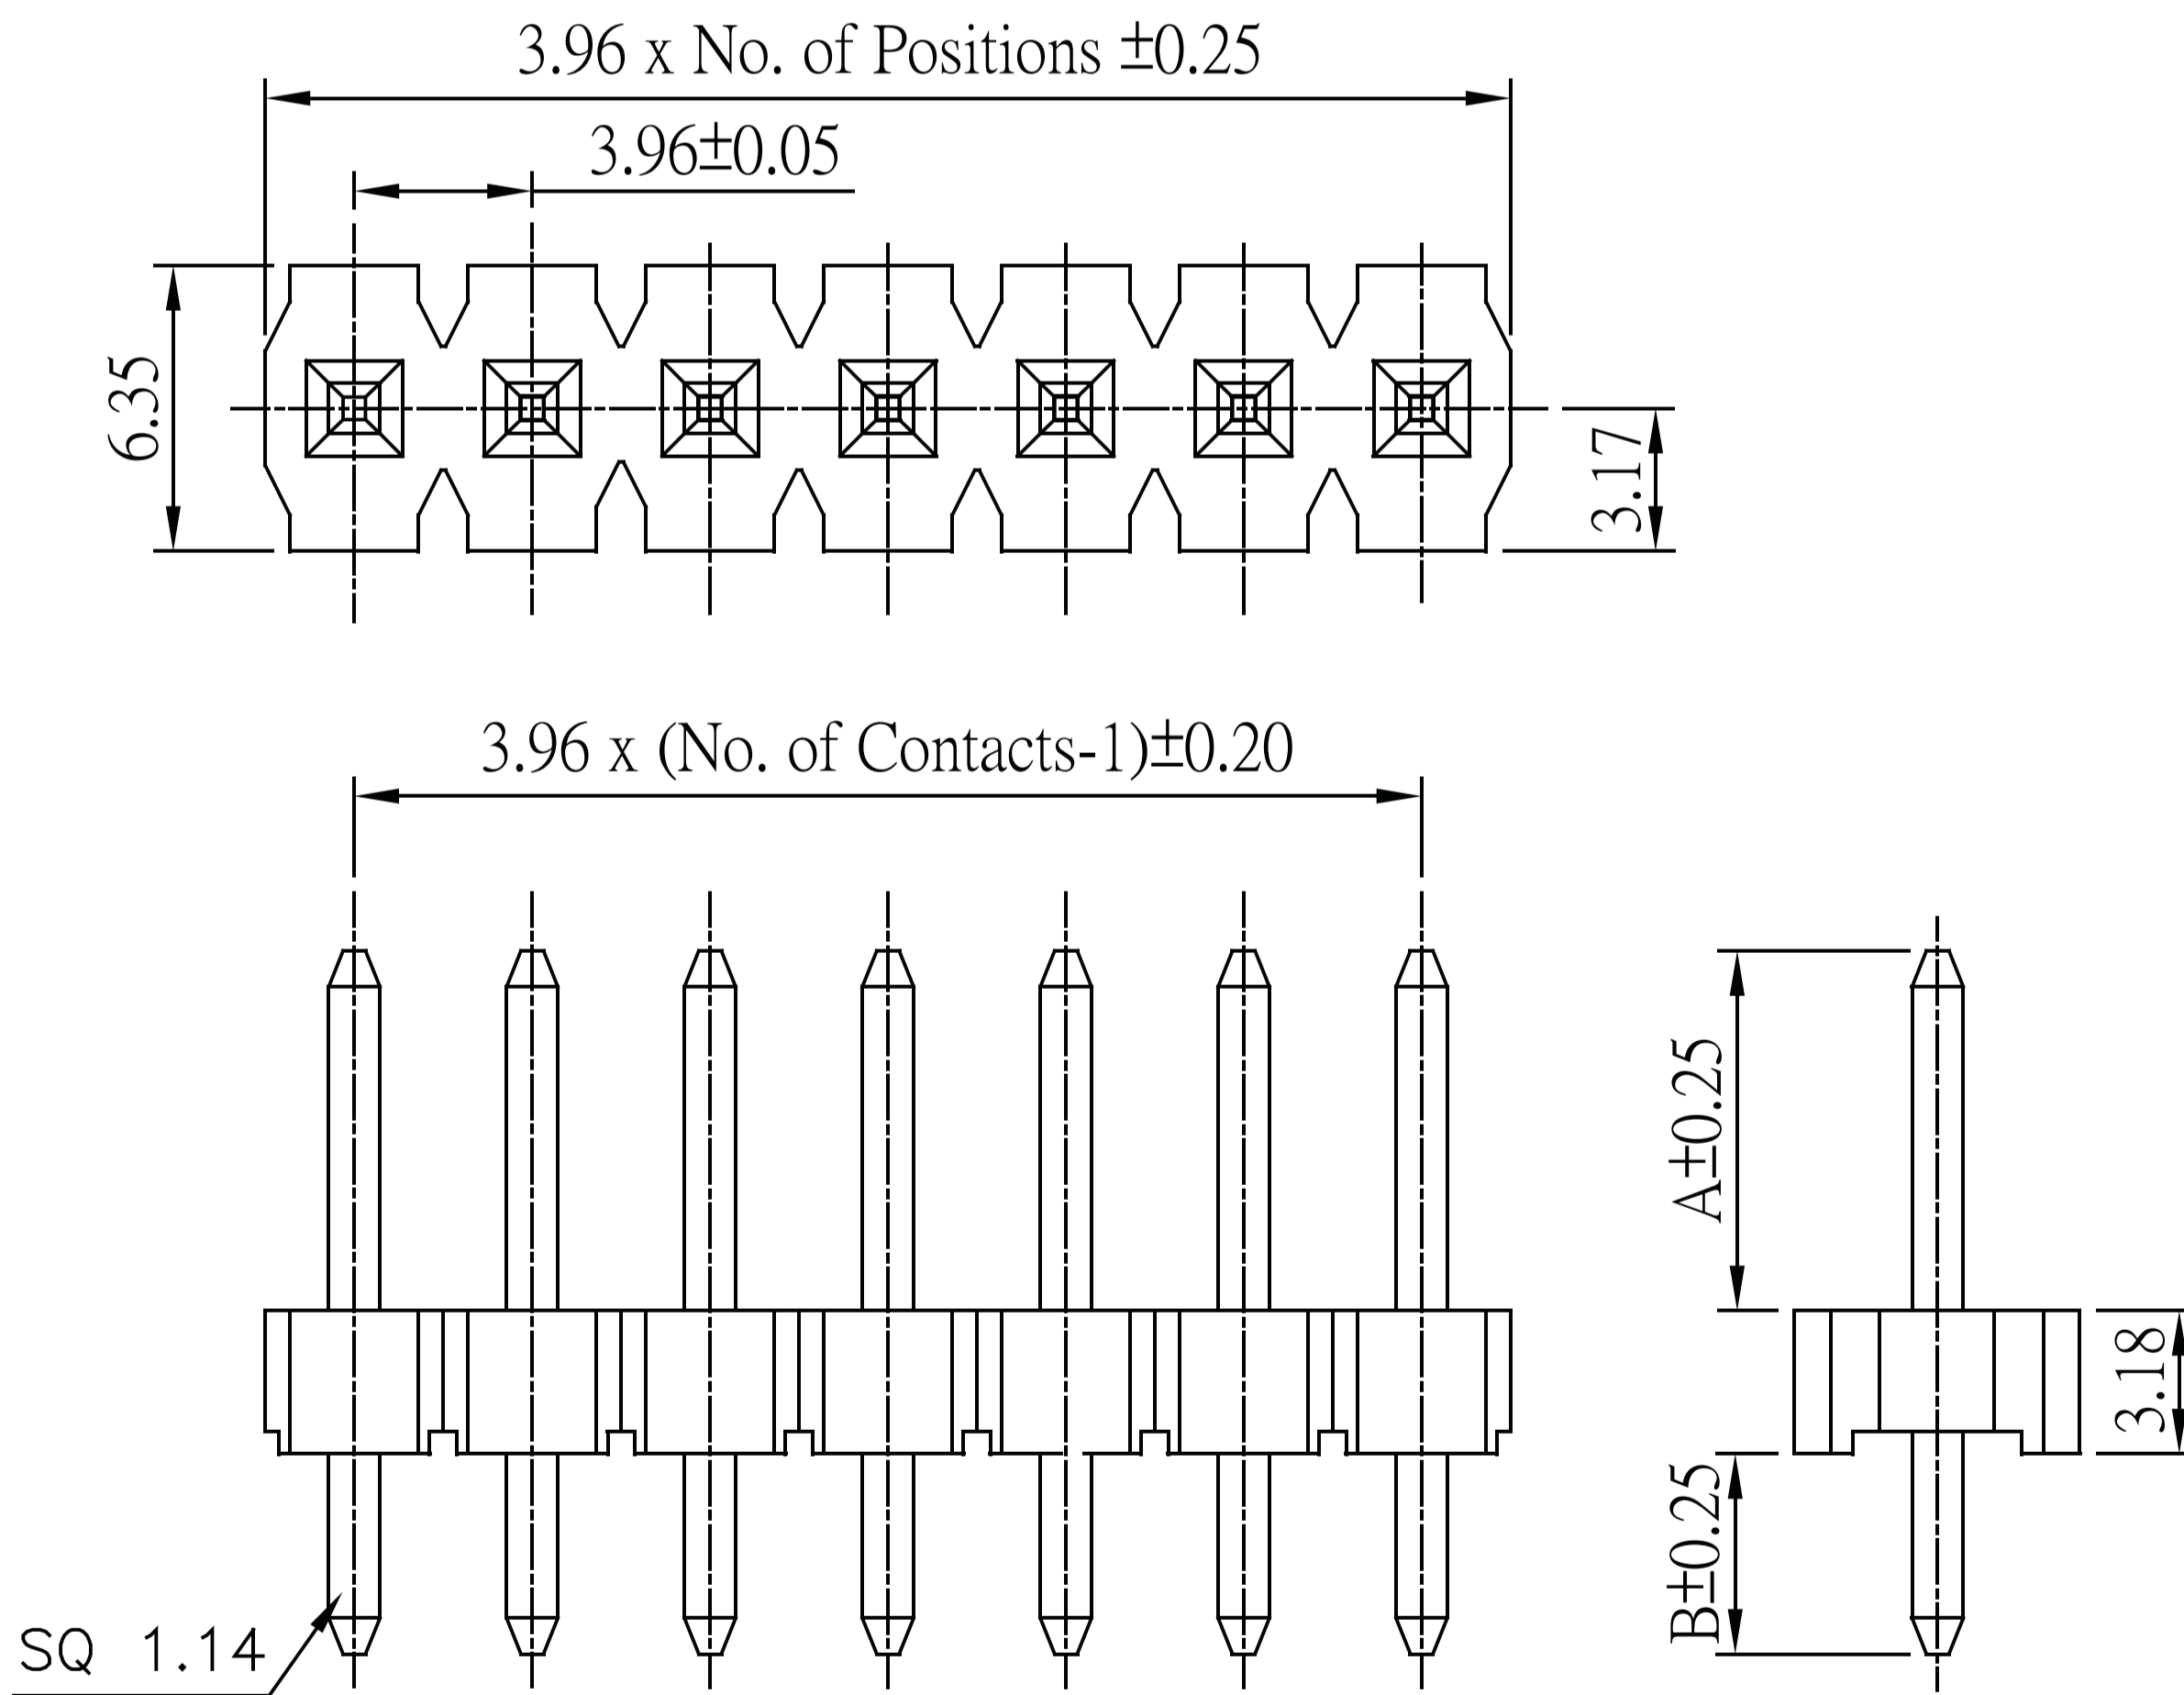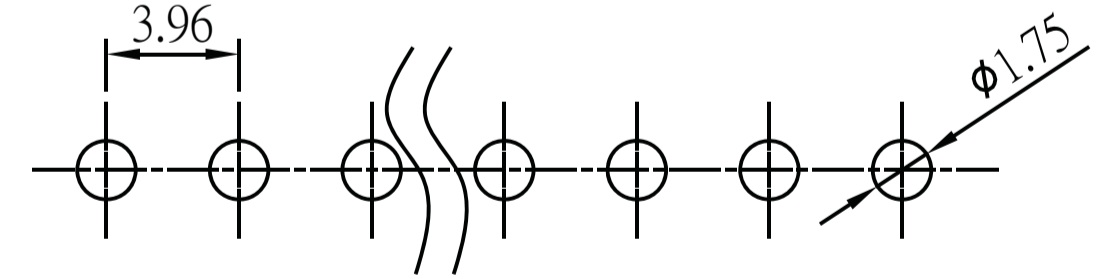

Recommended PCB Layout  
 (PCB TOLERANCE  $\pm 0.05$ )

Part No.: PH396S32-1XX-U

## ORDER INFORMATION

