

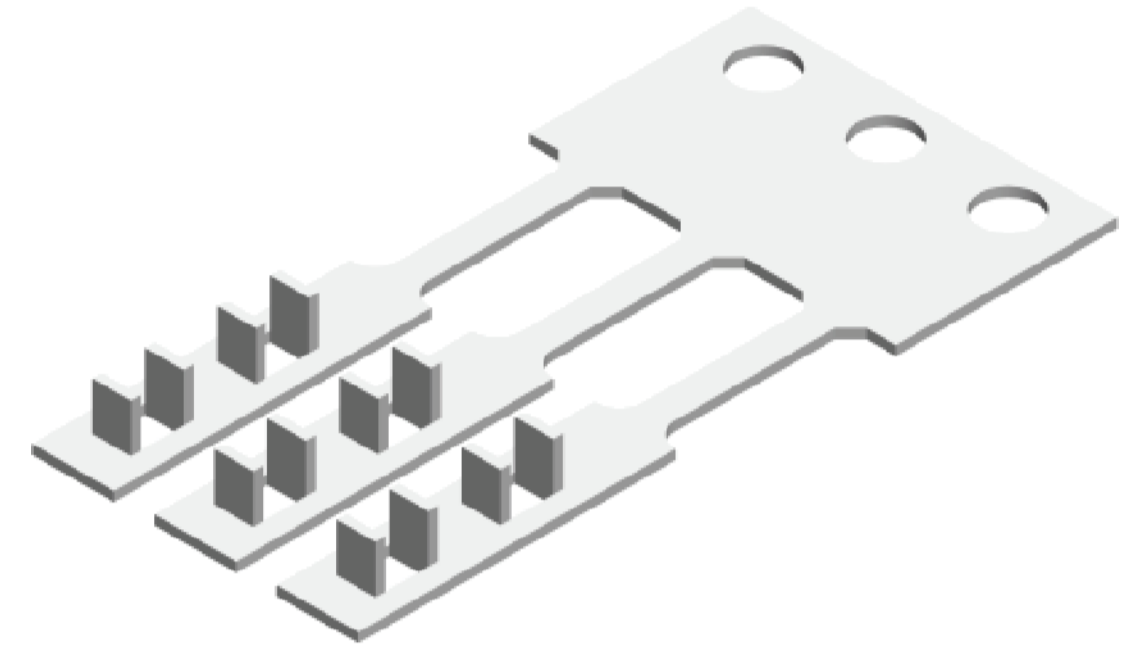
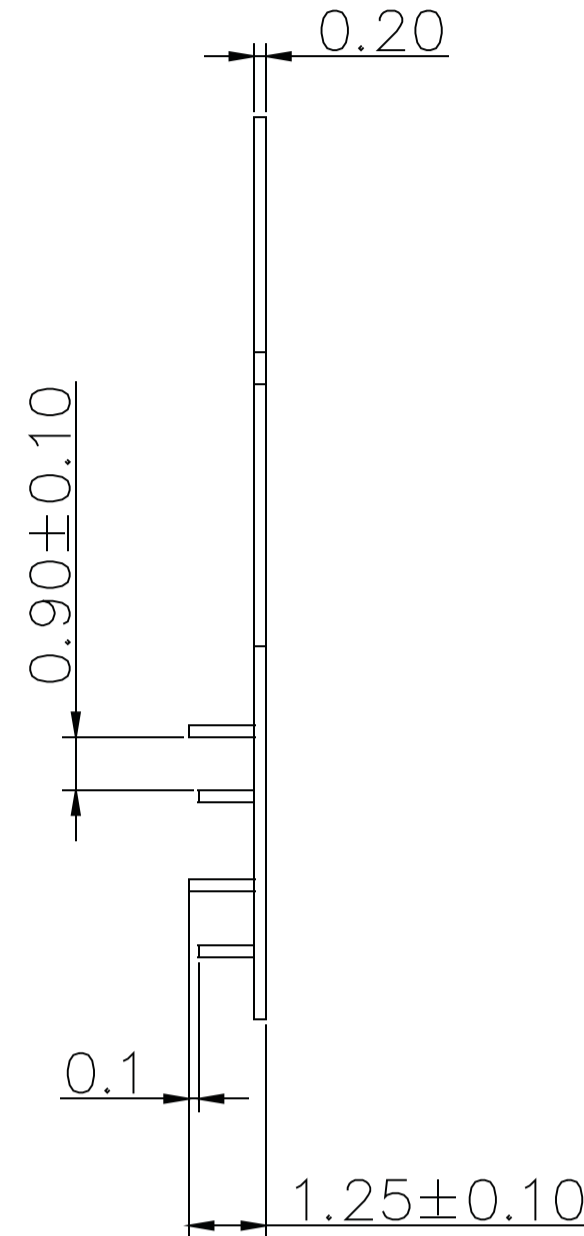
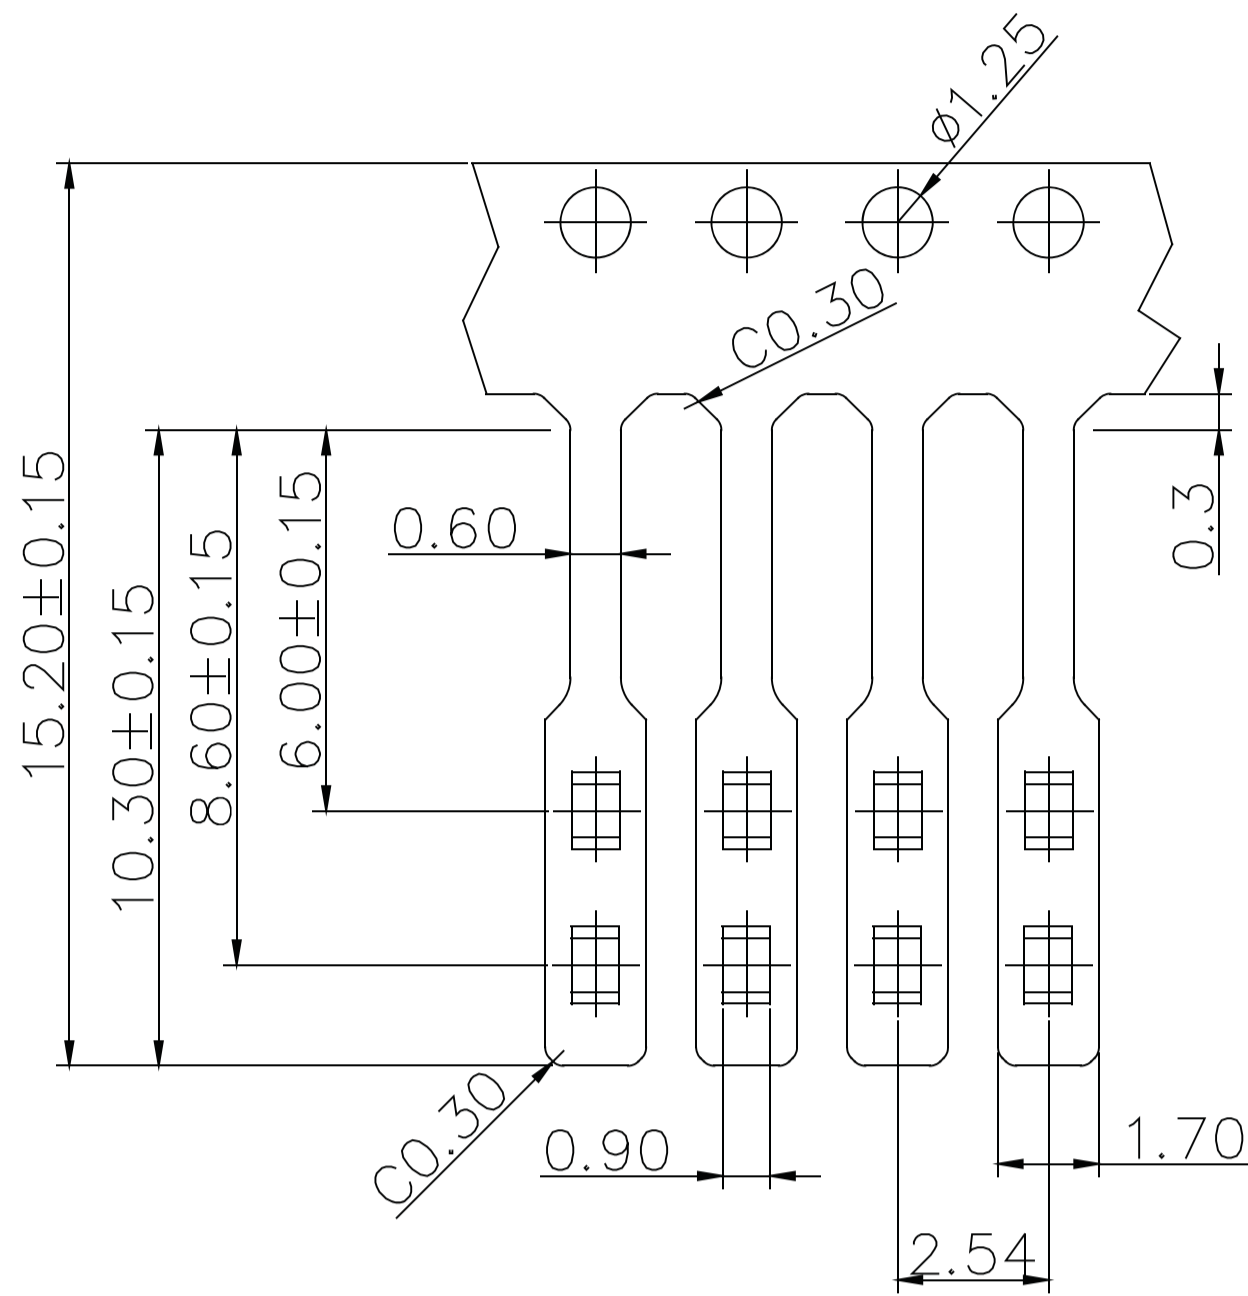
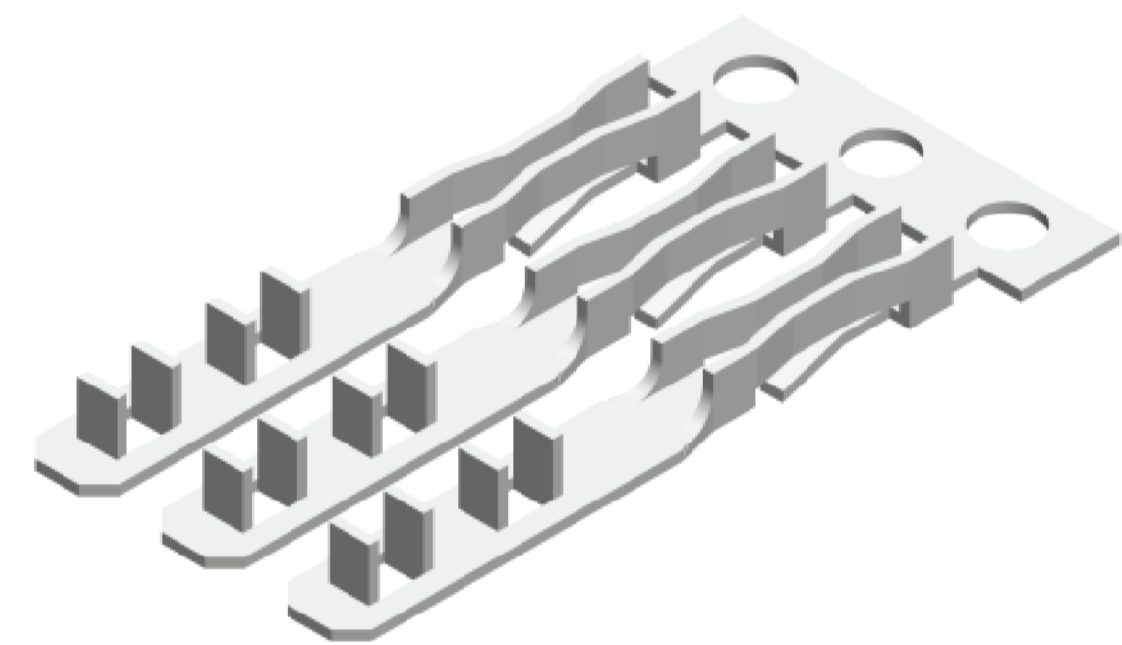


## 2.54mm Mini Latch Wafer Right Angle / Straight Type

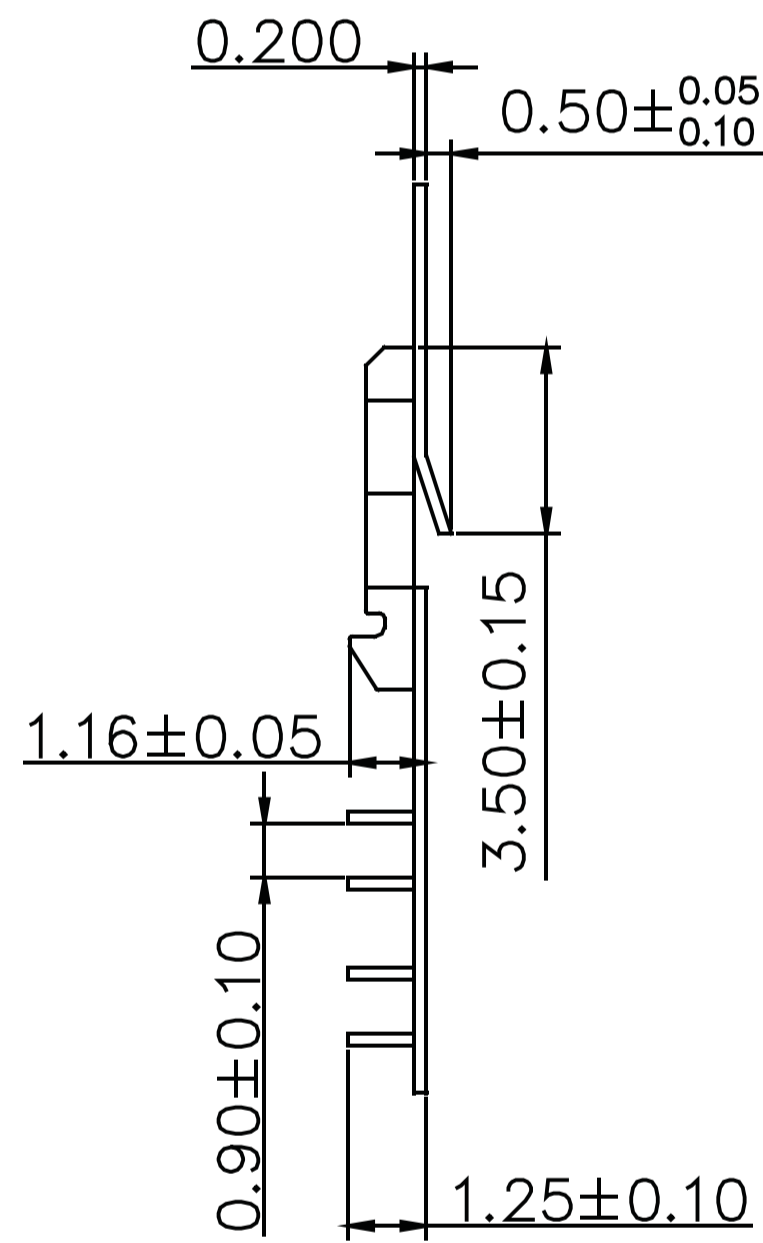

Material	Finish
PHOSPHOR BRONZE	Tin-plated

**Part No.:2550-T-L**

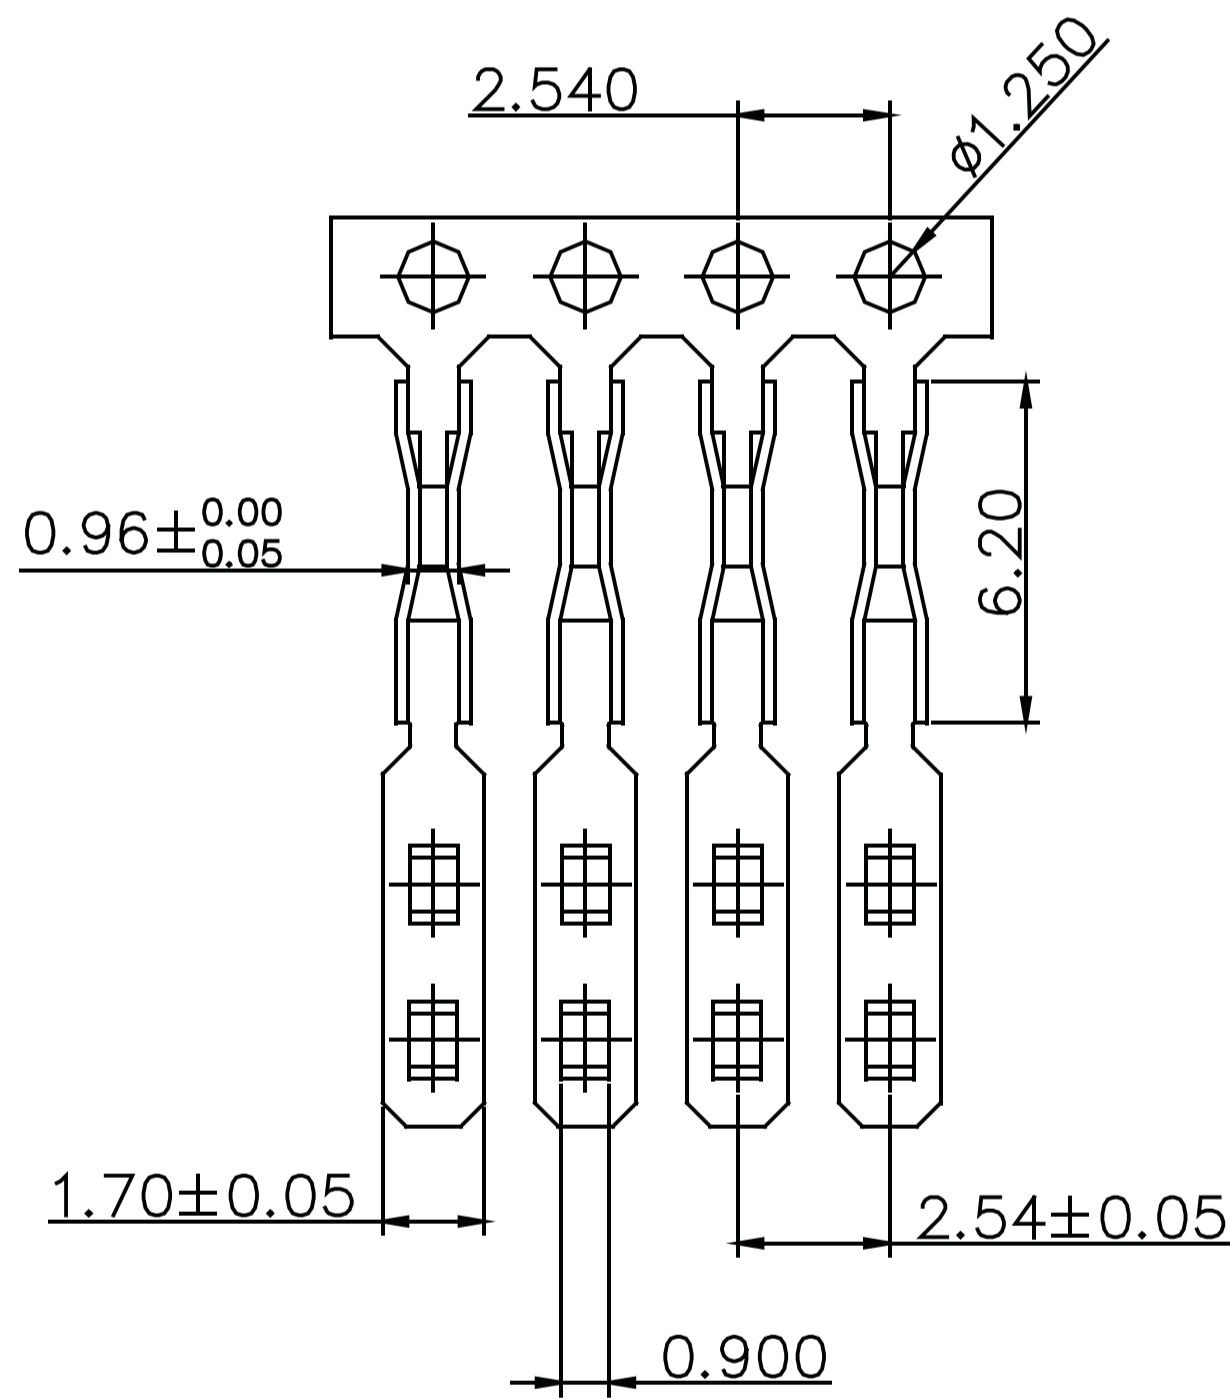



Material	Finish
PHOSPHOR BRONZE	Tin-plated

**Part No.:2550-FT-L**

### SPECIFICATIONS

Current Rating: 1A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20MΩ Max  
 Insulation Resistance: 500MΩ Min  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: Black

No. of Contacts	A	B	No. of Contacts	A	B
2	2.54	5.08	14	33.02	35.56
3	5.08	7.62	15	35.56	38.10
4	7.62	10.16	16	38.10	40.64
5	10.16	12.70	17	40.64	43.18
6	12.70	15.24	18	43.18	45.72
7	15.24	17.78	19	45.72	48.26
8	17.78	20.32	20	48.26	50.80
9	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.94	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02	25	60.96	63.50

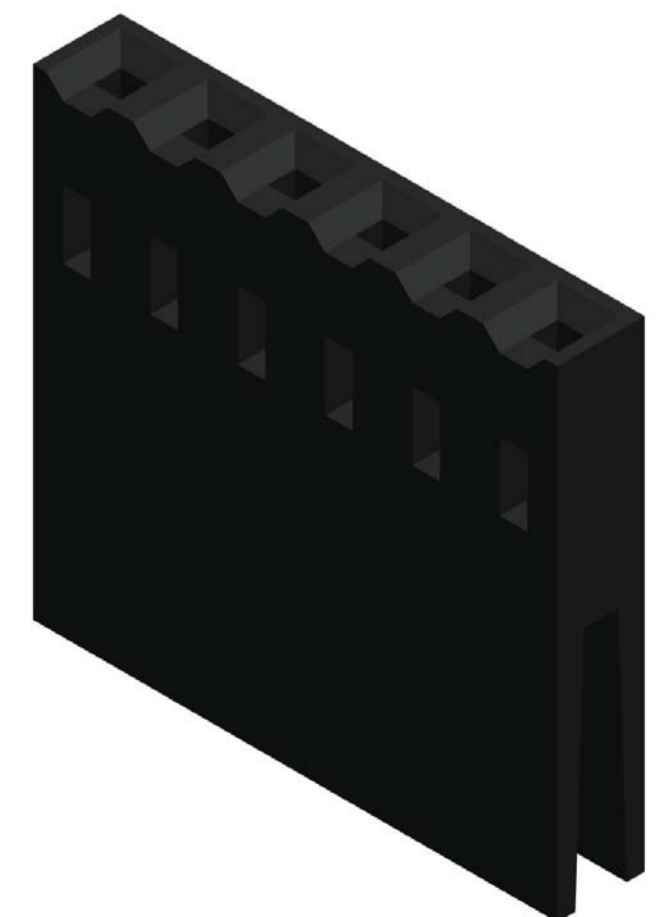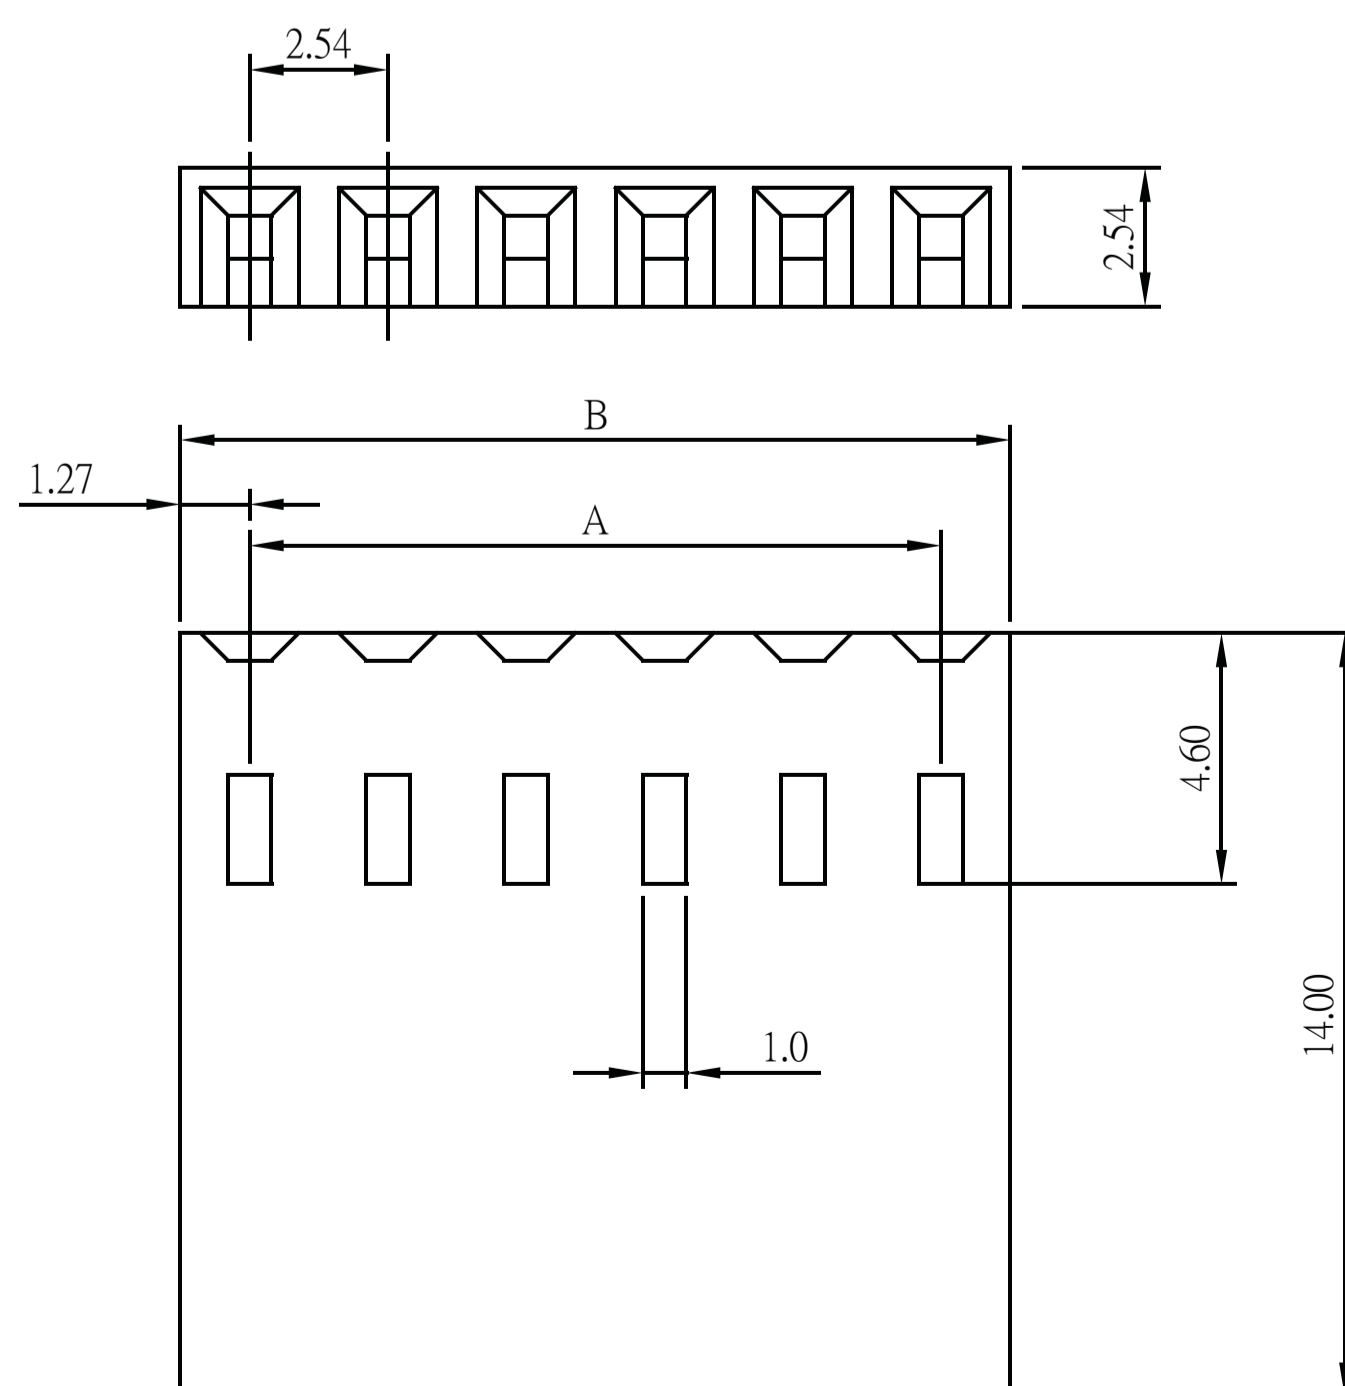

**Part No.:2550H-XXB-L**