



3.96mm Wafer Right Angle / Straight Type

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $3\text{m}\Omega$ Max
 Insulation Resistance: $5000\text{M}\Omega$ Min
 Withstanding Voltage: 2200V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

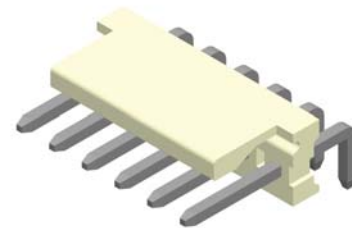


PART NO.	Dimensions	
	A	B
3965R-02TW-L	3.96	7.92
3965R-03TW-L	7.92	11.88
3965R-04TW-L	11.88	15.84
3965R-05TW-L	15.84	19.80
3965R-06TW-L	19.80	23.76
3965R-07TW-L	23.76	27.72
3965R-08TW-L	27.72	31.68
3965R-09TW-L	31.68	35.64
3965R-10TW-L	35.64	39.60
3965R-11TW-L	39.60	43.56
3965R-12TW-L	43.56	47.52
3965R-13TW-L	47.52	51.48
3965R-14TW-L	51.48	55.44
3965R-15TW-L	55.44	59.40
3965R-16TW-L	59.40	63.36
3965R-17TW-L	63.36	67.32
3965R-18TW-L	67.32	71.28
3965R-19TW-L	71.28	75.24
3965R-20TW-L	75.24	79.20

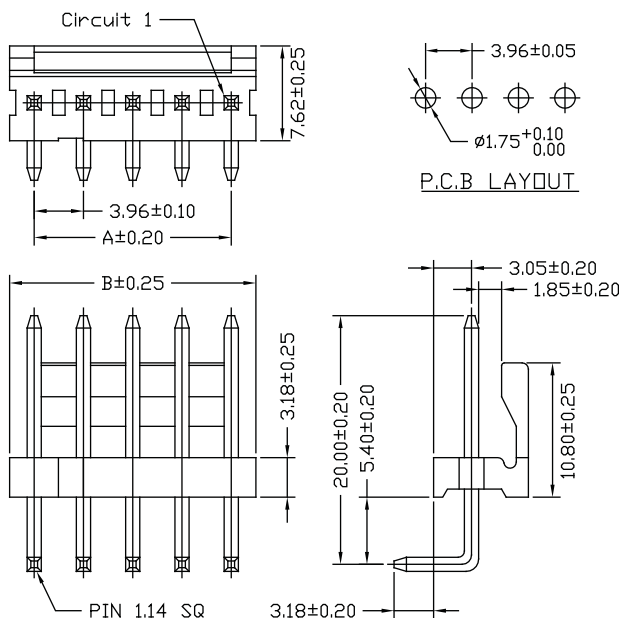


Part No.:3965R-XXTW-L

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $3\text{m}\Omega$ Max
 Insulation Resistance: $5000\text{M}\Omega$ Min
 Withstanding Voltage: 2200V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)



PART NO.	Dimensions	
	A	B
3965S-02TW-L	3.96	7.92
3965S-03TW-L	7.92	11.88
3965S-04TW-L	11.88	15.84
3965S-05TW-L	15.84	19.80
3965S-06TW-L	19.80	23.76
3965S-07TW-L	23.76	27.72
3965S-08TW-L	27.72	31.68
3965S-09TW-L	31.68	35.64
3965S-10TW-L	35.64	39.60
3965S-11TW-L	39.60	43.56
3965S-12TW-L	43.56	47.52
3965S-13TW-L	47.52	51.48
3965S-14TW-L	51.48	55.44
3965S-15TW-L	55.44	59.40
3965S-16TW-L	59.40	63.36
3965S-17TW-L	63.36	67.32
3965S-18TW-L	67.32	71.28
3965S-19TW-L	71.28	75.24
3965S-20TW-L	75.24	79.20

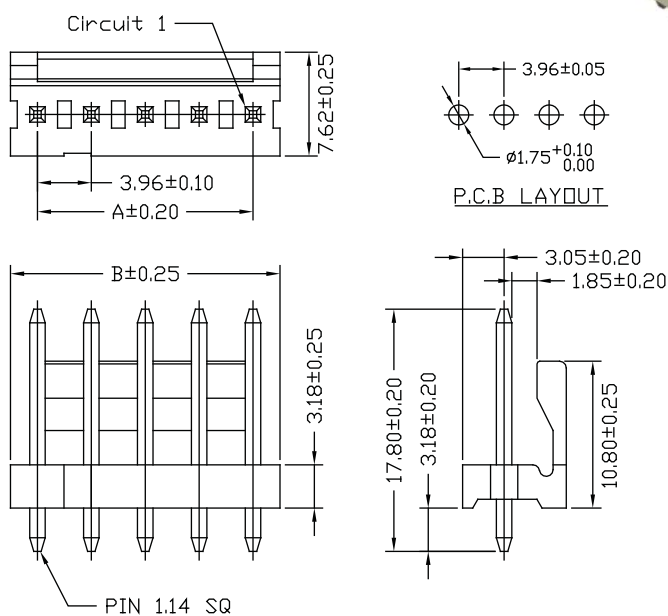

Part No.:3965S-XXTW-L