

CONNECTORS MANUFACTURER






Old P/N.:1255 Series
1256 Series

1.25mm Terminal / Housing / Wafer SMT Straight / SMT R/A Type

Specifications

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Terminal: Phosphor Bronze / Gold Plated
Solder Tabs: Phosphor Bronze / Tin Plated
Material: Housing: Nylon 66, UL94V-0
Wafer: Nylon 6T, UL94V-0

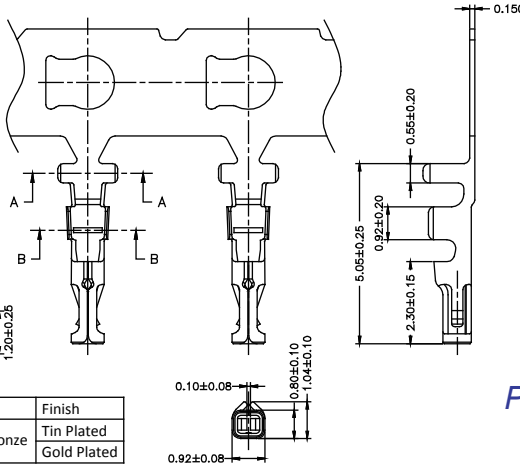



Part No.	Wire Range	Insulation O.D.	Material	Finish
5T1255N-PT0R	#28-#32	0.90mm(Max)	Phosphor Bronze	Tin Plated
5T1255N-PG0R				Gold Plated

P/N.:5T1255N-PXR-01

T0: Tin plated
G0: Gold plated




No. of Contacts	Dimensions		
	A	B	C
5	2.50	4.90	6.00
7	3.75	6.15	7.25
9	5.00	7.40	8.50
11	6.25	8.65	9.75
13	7.50	9.90	11.00
15	8.75	11.15	12.25
17	10.00	12.40	13.50
19	11.25	13.65	14.75
21	12.50	14.90	16.00
31	18.75	21.15	22.25
41	25.00	27.40	28.50

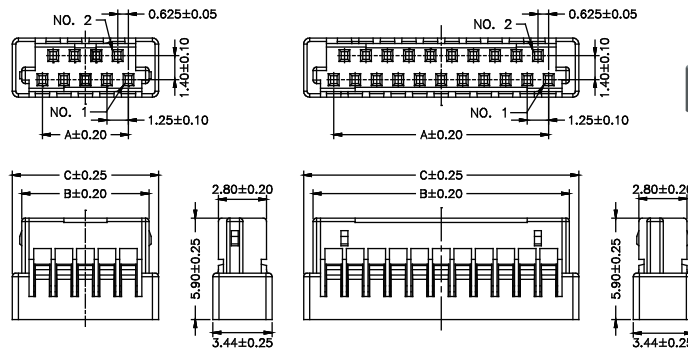



5,7,9,11 Contacts

13,15,17,19,21,31,41 Contacts

P/N.:5H1256N0-1XXBBL00-01




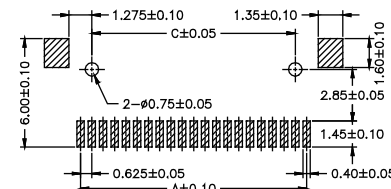
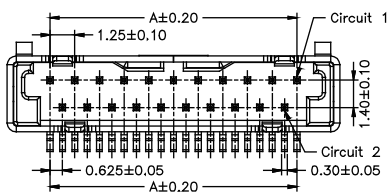


No. of Contacts	Dimensions		
	A	B	C
21	12.50	16.85	11.25
31	18.75	23.10	17.50

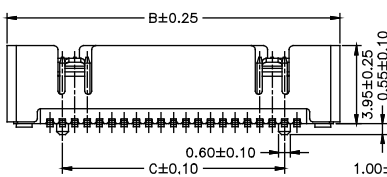

P/N.:5W1256GX-1XXG0BRU-01

1: WITH Post
0: W/O Post

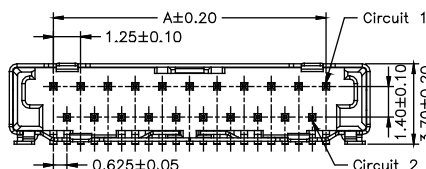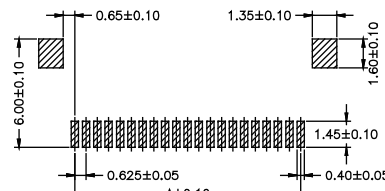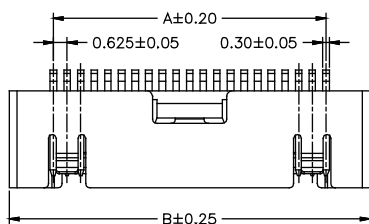

No. of Contacts	Dimensions	
	A	B
21	12.50	16.55
31	18.75	22.80
41	25.00	29.05

P/N.:5W1256H0-2XXG0BRU-01

Housing Wafer Terminal



ROHS