

NOTE

Material: Copper Alloy

Thickness: 0.1mm






Plated: Au 1u" on Contact Area Min.

Au 1u" on Solder Area Min.

Nickel Underplating over All

Height of Application: 0.50 to 0.95mm (Single Actuation)

0.55 to 0.95mm (Repeated Actuation)

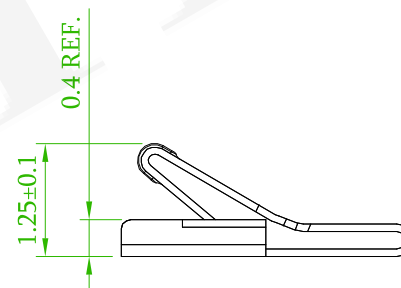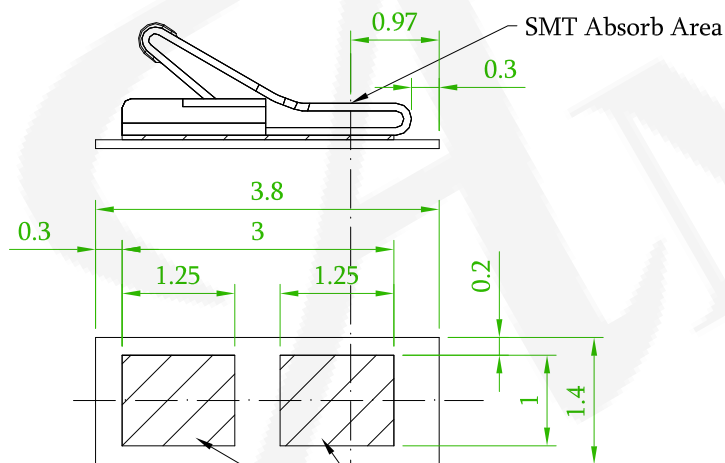

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EMI SPRING				頁數 Page	1/1
	品號 PART NO.	3SQM-NN12NN-NNA1G				繪圖 DRAWN	Gary 2018/05/03
	圖號 DRAWING NO.	GW271-GB108		版本 REV.	A	核對 CHECKED	Josh 2018/05/03
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/05/03
	公差 TOLERANCE	±0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	