

NOTE

Material: Copper Alloy

Thickness: 0.10mm

Electroplate:

Au >1u" gold plating on Contact Area

Gold Flash on Solder Area

Nickel Underplating over All



Height of Application :

0.70 to 1.1mm(Single actuation)

0.80 to 1.1mm(Repeated actuation)



AMTEK 糧德
2019.04.11
Released DCC

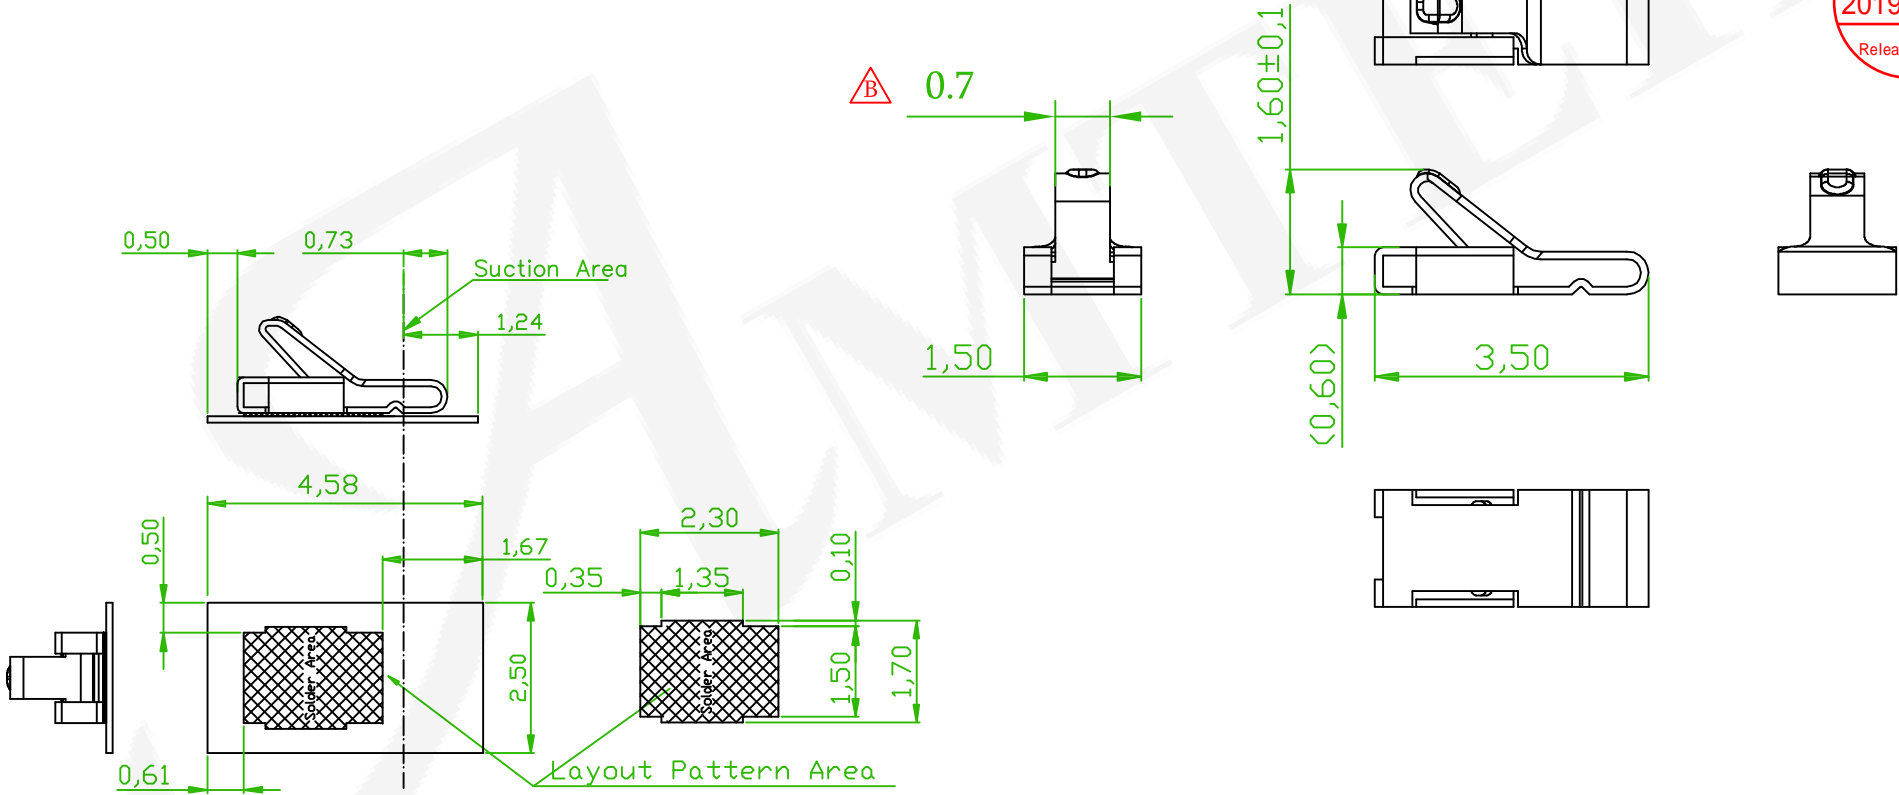

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

| | | | |
|---------------------|----------------------------------|---------|------------|
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
| $\Delta B \times 2$ | Add: Height of Application , 0.7 | David | 2019/04/10 |

| | | | | | | |
|--|----------------------|-------------------|-------------|------|------------------------------|---------------------|
| <p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p> | 品名 TITLE | EMI SPRING | | | 頁數 Page | 1/1 |
| | 品號 PART NO. | 3SQM-NN16NN-A1Q1G | | | 繪圖 DRAWN | Elisa 2019/03/15 |
| | 圖號 DRAWING NO. | GW271-EI015 | 版本 REV. | B | 核對 CHECKED | Josh 2019/03/15 |
| | 客戶品號 CUSTOMER P/N | | 比例 SCALE | None | 承認 APPROVED | Josh 2019/03/15 |
| | 公差 TOLERANCE | ± 0.20 | 單位 UNIT | mm | THIRD ANGLE PROJECTION | |