

NOTE

Material: Copper Alloys

Thickness: 0.12mm

Electroplate:

Au >1u" plating on Contact Area








Gold Flash on Solder Area

Nickel Underplating over All

Height of Application:


1.90 to 1.00mm (Single Actuation)

1.90 to 1.10mm (Repeated Actuation)

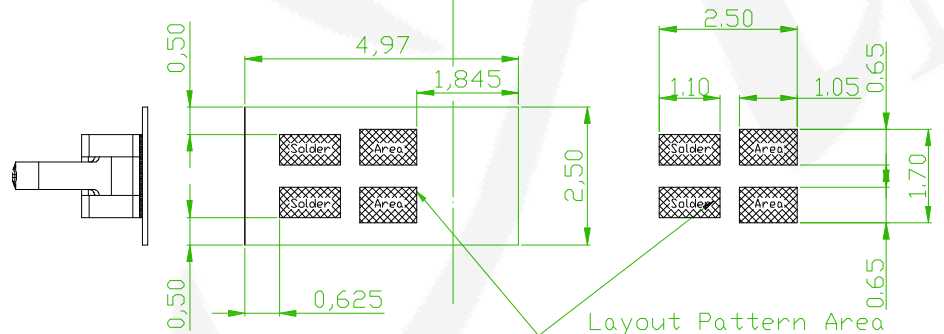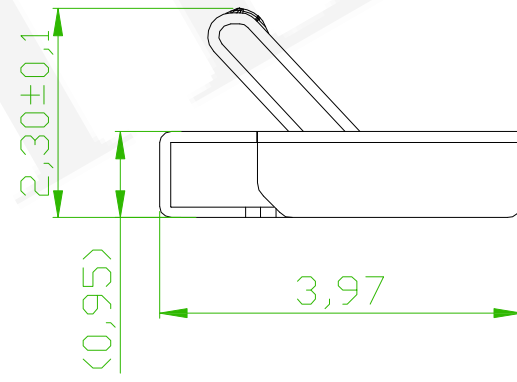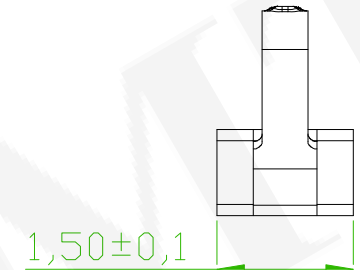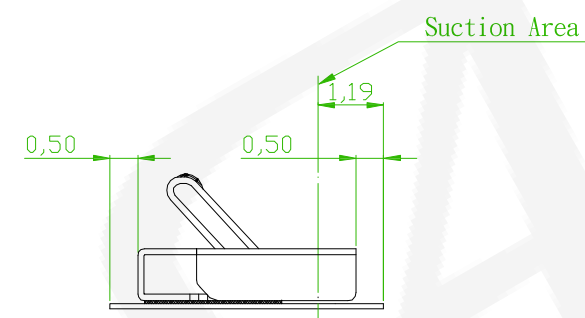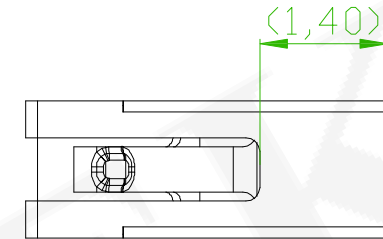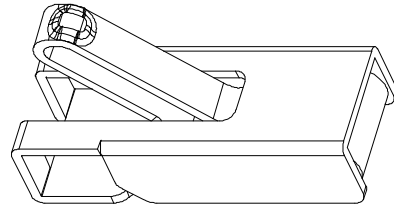

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EMI SPRING				頁數 Page	1/1
品號 PART NO.	3SQM-NN23NN-NNQ1G			繪圖 DRAWN	Elisa 2019/03/14	
圖號 DRAWING NO.	GW271-EI014	版本 REV.	A	核對 CHECKED	Josh 2019/03/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/14	
公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	