

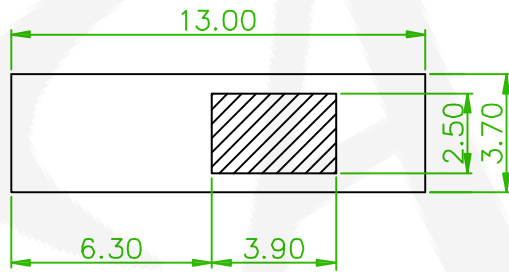
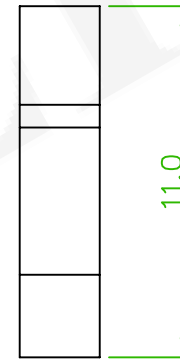
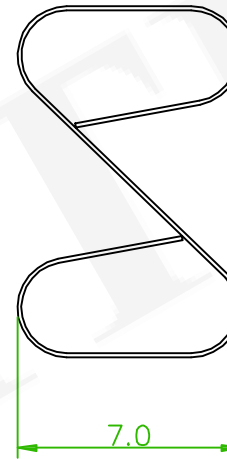



NOTE

Material: BeCu
 Thickness: 0.12mm
 Plated: Gold Flash on Contact Area
 Gold Flash on Solder Area
 Nickel Underplating over All
 Height of Application: 6.70 to 10.50mm
 Operating Temperature: -20°C~+85°C
 Contact Resistance: 30mΩ Max
 Rated Current: 3A

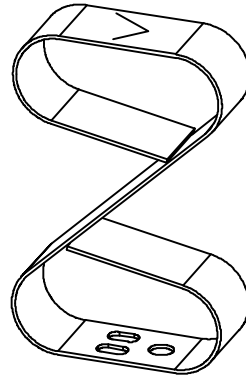

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)



<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	EMI SPRING				頁數 Page	1/1
	品號 PART NO.	3SS8-NN110N-NNNRG			繪圖 DRAWN	David 2020/02/21	
	圖號 DRAWING NO.	GW271-DV829	版本 REV.	A	核對 CHECKED	Josh 2020/02/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/02/21	
	公差 TOLERANCE	±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------