

Specifications

Current Rate: 3 AMP

Insulation Resistance: 1000MΩ Min

Contact Resistance: 30mΩ Max

Dielectric voltage:500V AC at sea level

Operation Temperature: -55°C to +105°C

Material


Insulator: PBT, UL 94V-0

Terminal: Copper Alloy



Shell: SPCC

Rivet: Copper Alloy

ORDER INFORMATION

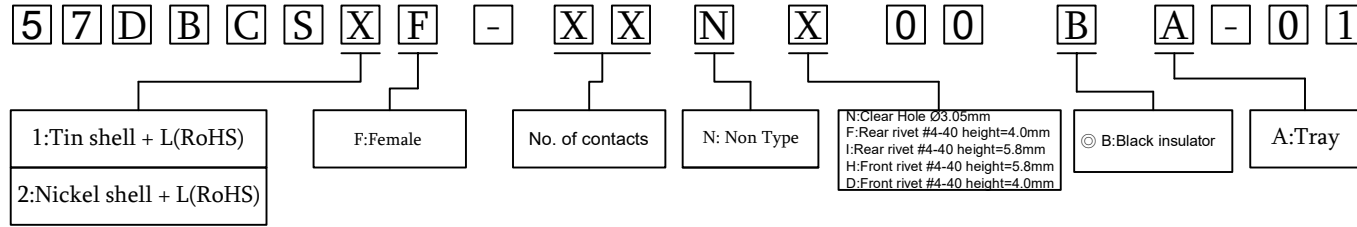

©: Standard Recommend

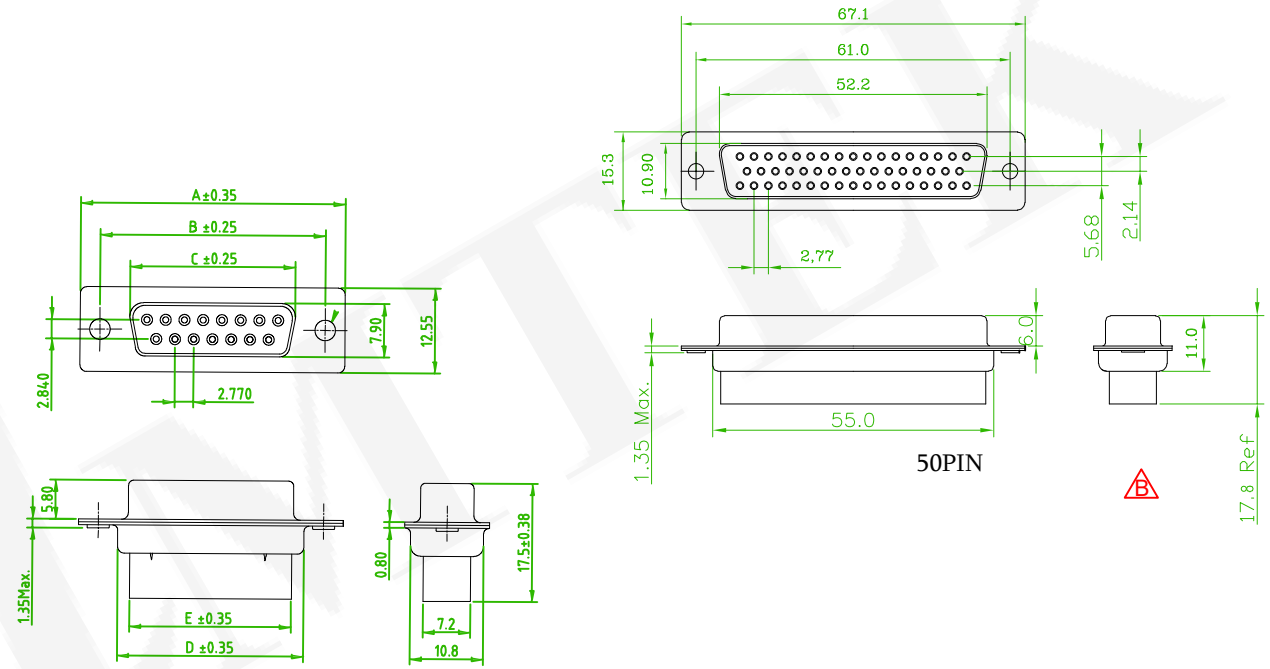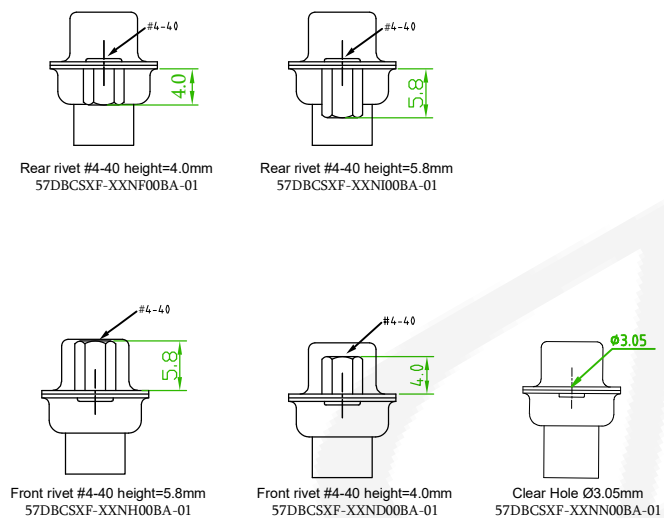

No.	A	B	C	D	E
09	30.81	24.99	16.30	19.15	15.60
15	39.14	33.32	24.75	27.51	24.40
25	53.04	47.04	38.35	41.00	37.90
37	69.32	63.50	54.75	57.30	54.30
Add 50PIN				Alice	2023/07/25
REV.	ECN NO. OR DESCRIPTION			REVISED	DATE

Old Part No.: DBC-FXX-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035	品名 TITLE	D-SUB CRIMP TYPE				
	品號 PART NO.	57DBCSXF-XXNX00BA-01			繪圖 DRAWN	Rex 2023/01/18
	圖號 DRAWING NO.	GW054-RE049			核對 CHECKED	Josh 2023/01/18
	客戶品號 CUSTOMER P/N				承認 APPROVED	Josh 2023/01/18
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	.XXX ±0.15 X°: ±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION