


SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -25 °C to +85 °C

MATERIAL


Insulator: P.B.T, UL 94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

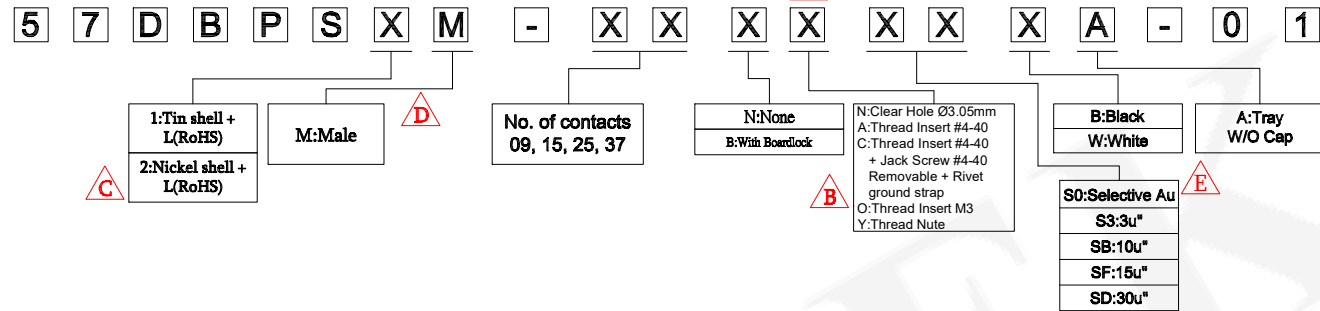


Dimensions

Contacts	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86




NN

Clear Hole Ø3.05mm




NA

Thread Insert #4-40




BA

Thread Insert #4-40




NY

Thread Nut




NC

Thread Insert #4-40
 + Jack Screw #4-40 Removable
 + Rivet ground strap




NO

Thread Insert M3

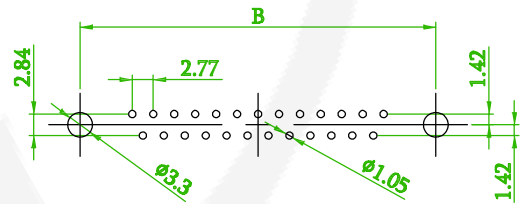

P.C.B. LAYOUT
 TOLERANCE: ±0.1

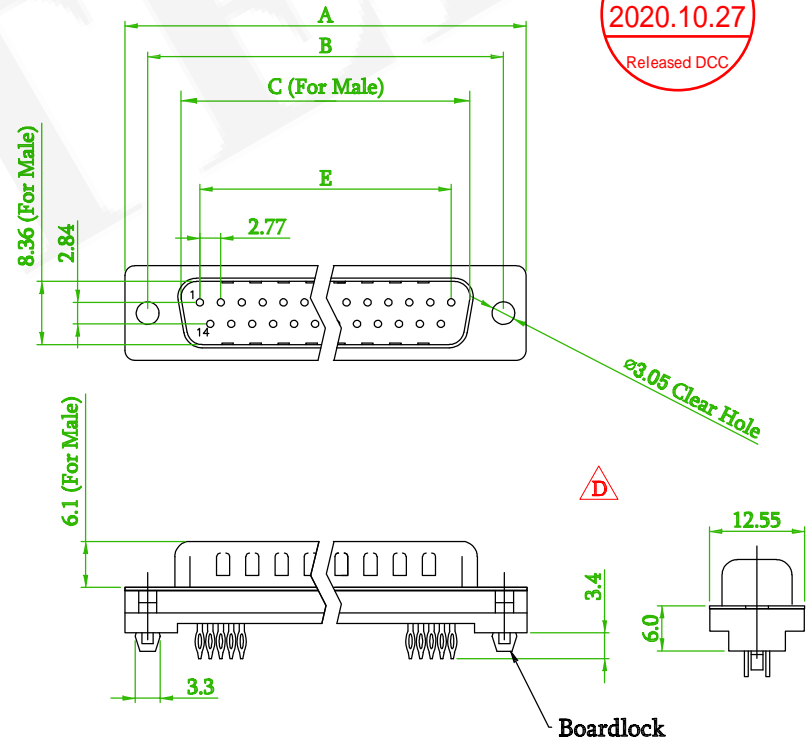

Boardlock

F x6	Revise the Screw accessories	Alice	2020/10/15
E x1	QEC.:200203 Delete the Gold flash option	Benson	2020/02/25
D x3	ECN.: 190909 X->F/M	Benson	2019/10/28
C x1	Add an option	Daniel	2019/03/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-9030

品名 TITLE	D-SUB PRESS FIT V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	57DBPSXM-XXXXXXXXA-01				繪圖 DRAWN	Gary 2017/08/22
圖號 DRAWING NO.	GW006-BS419	版本 REV.	F	核對 CHECKED	Josh 2019/03/28	
客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	Josh 2019/03/28	
公差 TOLERANCE	.X ±0.25 .XX ±0.13	單位 UNIT	mm	THIRD ANGLE PROJECTION		