





SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: PBT, UL94V-0
 Contact Pin: Copper Alloy
 Shell: SPCC.
 Rivet: Copper Alloy.

ORDER INFORMATION

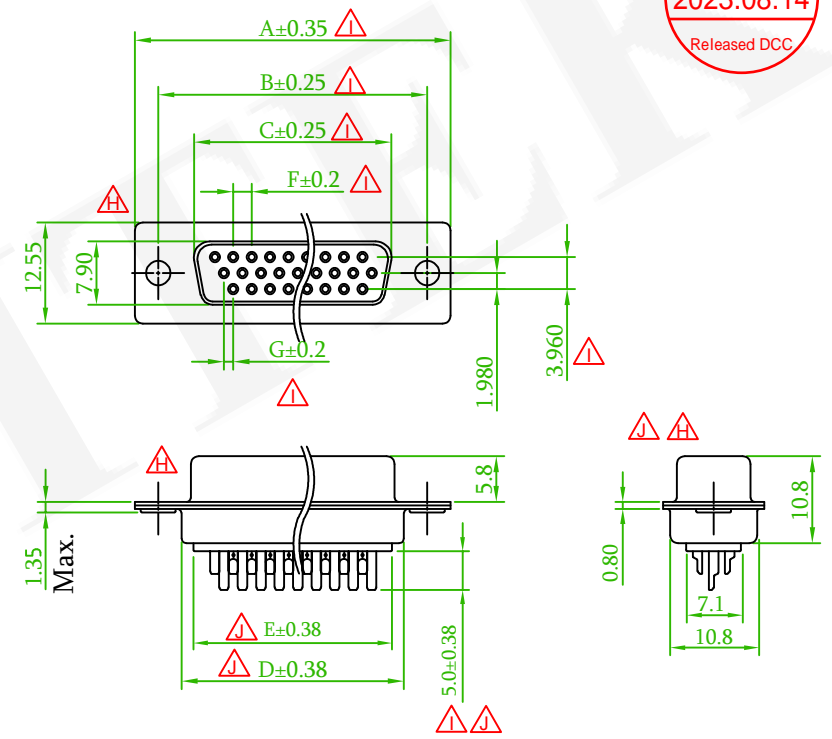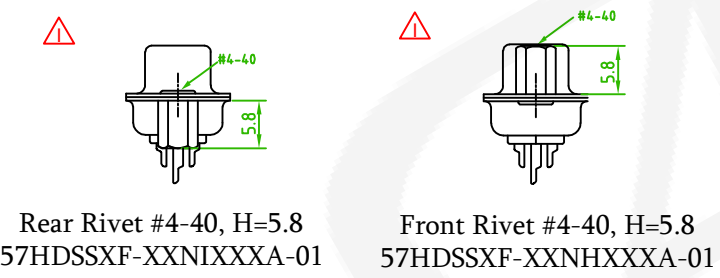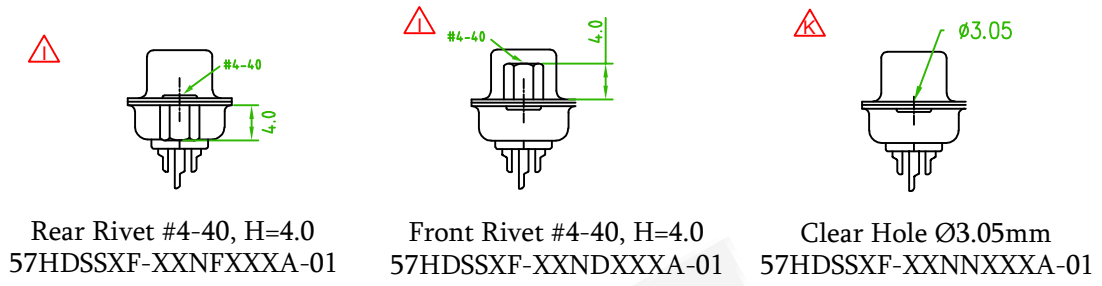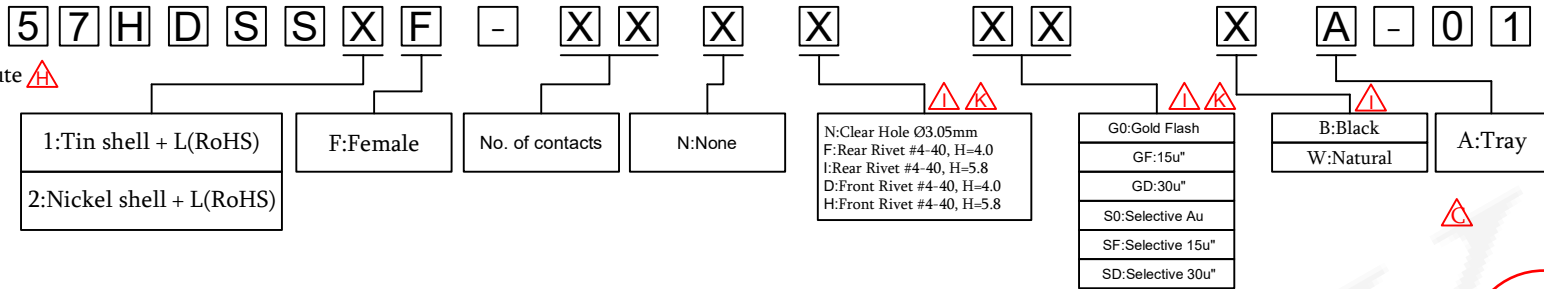

No.	A	B	C	D	E	F	G
15	30.80	24.99	16.35	19.10	15.60	2.29	1.145
26	39.20	33.32	24.75	27.50	24.50	2.29	1.145
44	53.05	47.04	38.35	41.00	37.90	2.29	1.145
62	69.40	63.50	54.75	57.30	54.50	2.41	1.205

Old Part No.: HDBS-FXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
x3	Add the options	Benson	2023/08/14
x5	ECN NO.: 230508 Revise the drawing	Rex	2023/05/26
x19	ECN NO.: 221018 Revise the drawing	Tim	2022/11/07

TEL: 886-2-2268-8036
 FAX: 886-2-2268-8035

品名 TITLE	D-SUB HIGH DENSITY SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	57HDSSXF-XXXXXXXXA-01			繪圖 DRAWN	Jeff 2015/09/08	
圖號 DRAWING NO.	GN010-RL870	版本 REV.	K	核對 CHECKED	Josh 2019/01/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/16	
公差 TOLERANCE	.X ± 0.35 .XXX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		