



SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max. \triangle \triangle
 Dielectric Voltage: 500V AC for one minute \triangle
 Operation Temperature: -55°C to +105°C


MATERIAL \triangle

Insulator: PBT, UL94V-0
 Contact Pin: Copper Alloy
 Shell: SPCC.
 Rivet: Copper Alloy.


ORDER INFORMATION

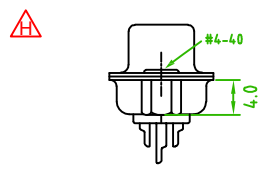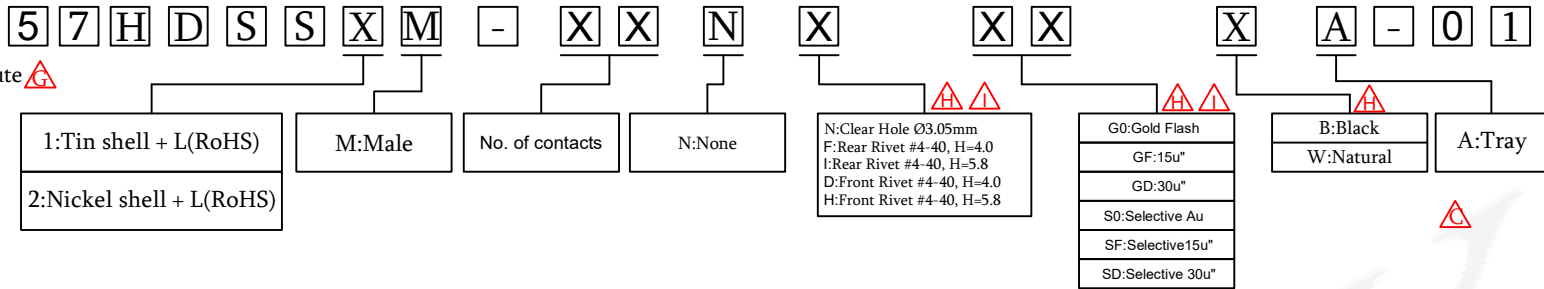


Rear Rivet #4-40, H=4.0
 57HDSSXM-XXNFXXA-01




Front Rivet #4-40, H=4.0
 57HDSSXM-XXNDXXA-01




N: Clear Hole \varnothing 3.05mm
 57HDSSXM-XXNNXXA-01



Rear Rivet #4-40, H=5.8
 57HDSSXM-XXNIXXA-01



Front Rivet #4-40, H=5.8
 57HDSSXM-XXNHXXA-01

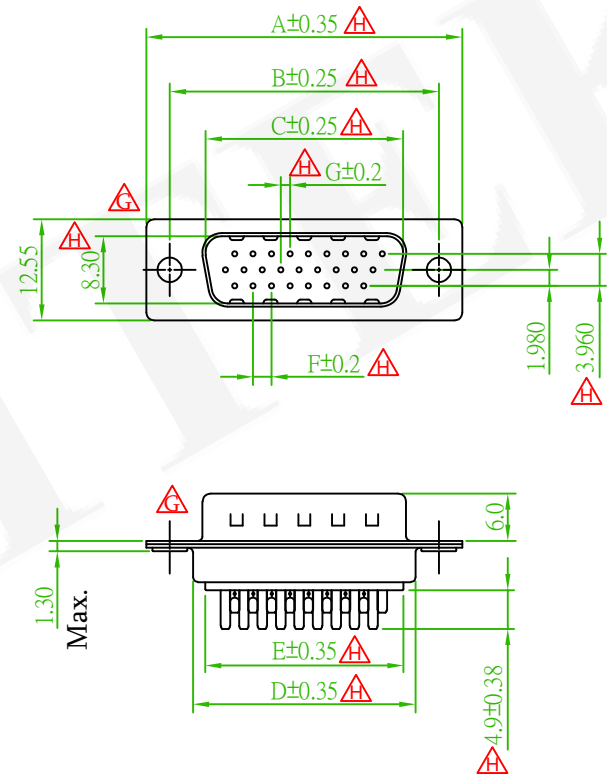

No.	A	B	C	D	E	F	G
15	30.80	24.99	16.92	19.10	15.60	2.29	1.145
26	39.20	33.32	25.30	27.50	24.50	2.29	1.145
44	53.05	47.04	39.00	41.00	37.90	2.29	1.145
62	69.40	63.50	55.40	57.30	54.50	2.41	1.205

Old Part No.: HDBS-MXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
\triangle X3	Add the options	Benson	2023/06/13
\triangle X19	ECN NO.:221013 Revise the drawing	Tim	2022/11/09
\triangle X7	ECN NO.:220519 Revise the drawing	Alice	2022/06/29

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	D-SUB HIGH DENSITY SOLDER TYPE				頁數 Page	1/1
品號 PART NO.	57HDSSXM-XXNXXXA-01				繪圖 DRAWN	Jeff 2015/09/08
圖號 DRAWING NO.	GN010-RL869	版本 REV.	I	核對 CHECKED	Josh 2018/03/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/26	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.XXX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	