

SPECIFICATIONS

Current Rating: 5 AMP

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -55°C ~ +105°C

MATERIAL

Insulator: Thermoplastic, UL94V-0

Contact: Brass

ORDER INFORMATION




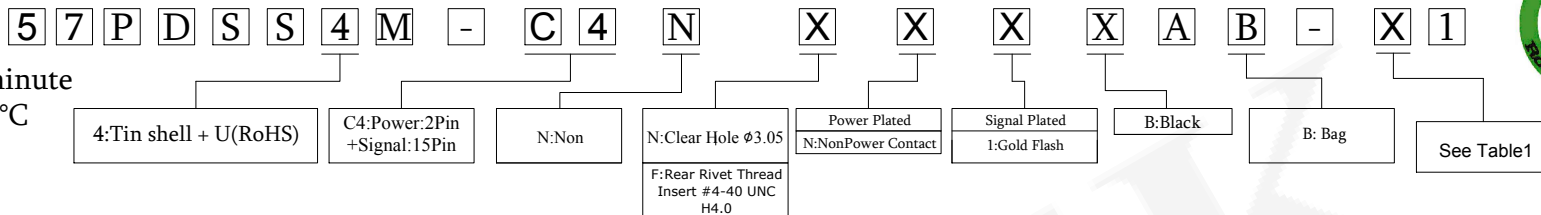


Table 1					
OPTION	Current Rating	Wire Size	Dimension		
			ϕA	ϕB	C
4	40 Amps	AWG #8	$\phi 4.6$	$\phi 5.5$	5.5
2	20 Amps	AWG #12	$\phi 2.7$	$\phi 3.6$	5.0
1	10 Amps	AWG #16	$\phi 1.7$	$\phi 2.5$	4.5

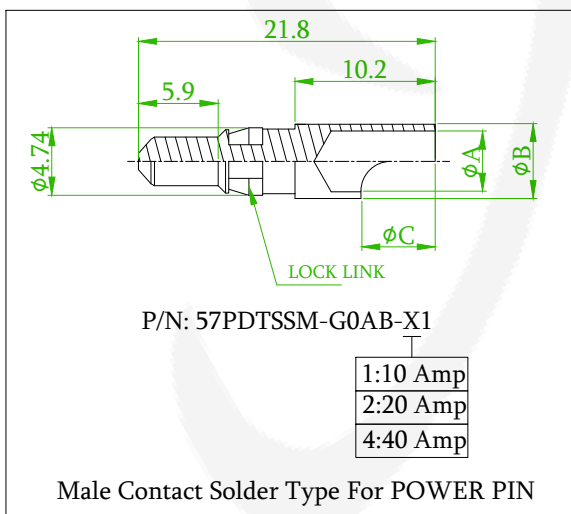


57PDSS4M-C4NNN1BAJ-X1


Clear Hole $\phi 3.05$

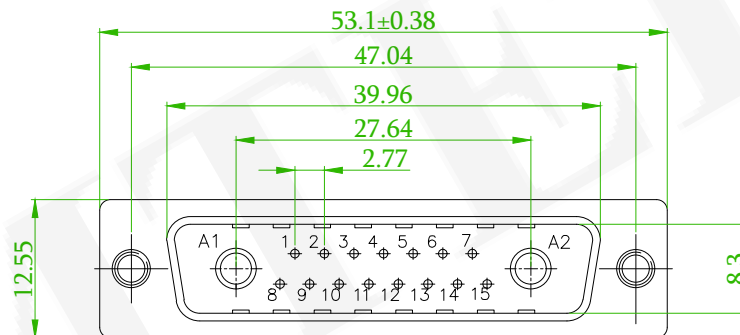

Male Contact Solder Type For POWER PIN

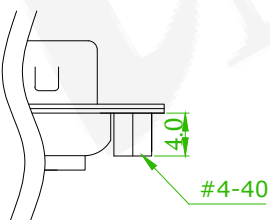

57PDSS4M-C4NFN1BAJ-X1
Rear Rivet Thread Insert #4-40
UNC H4.0

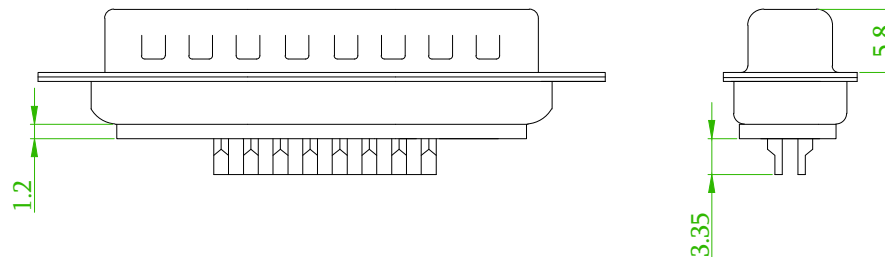

品名 TITLE	Power Conn.				
品號 PART NO.	57PDSS4M-C4NXXXXAB-X1			繪圖 DRAWN	Alice 2020/06/19
圖號 DRAWING NO.	GW006-AL022			核對 CHECKED	Josh 2020/06/19
客戶品號 CUSTOMER P/N				承認 APPROVED	Josh 2020/06/19
公差 TOLERANCE	.X ± 0.25 .XX ± 0.13			比例 SCALE	None
	單位 UNIT			mm	THIRD ANGLE PROJECTION

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE