

**SPECIFICATION**










Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 25mΩ Max.  
 Dielectric Voltage: 500VAC for one minute  
 Operation Temperature: -55°C to +105°C

**MATERIAL**

Insulator: PBT/NY9T, UL94V-0  
 Contact Pin: Copper Alloy  
 Shell:SPCC  
 Boardlock:Copper Alloy  
 Rivet:Copper Alloy  
 Screw:Copper Alloy

**ORDER INFORMATION**

5 7 S D D R X M - 0 9 A X X X A - 0 1

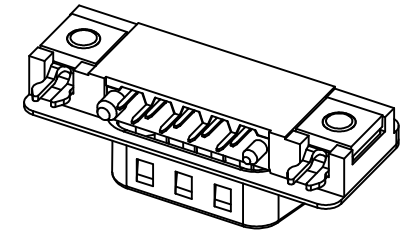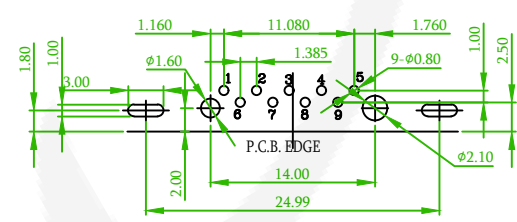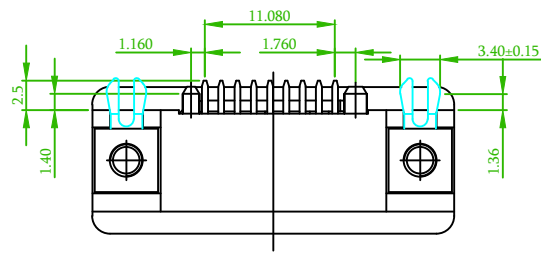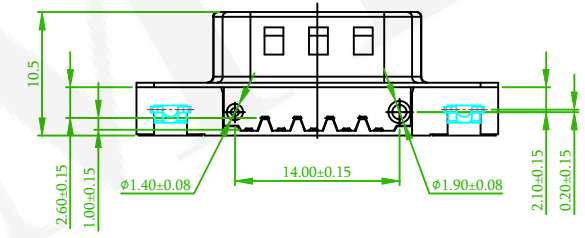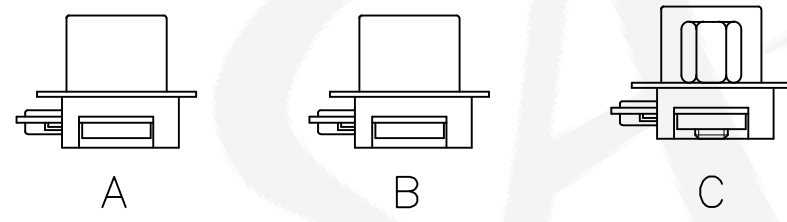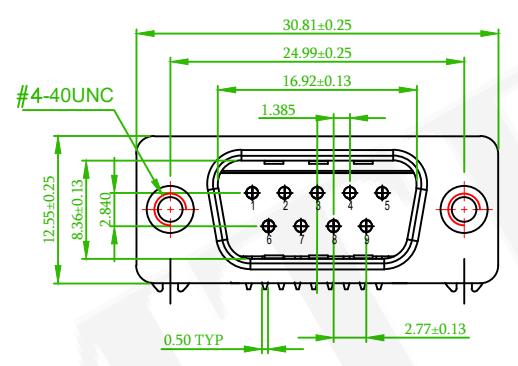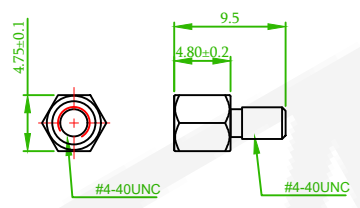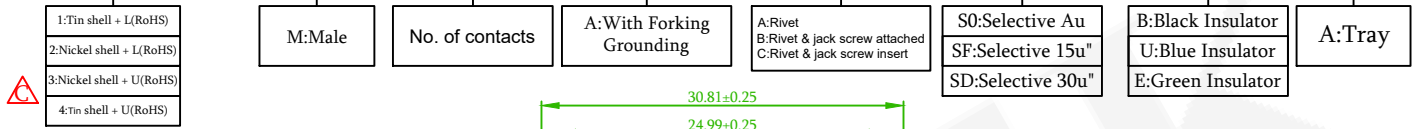

Old Part No.:MNDDBR-M09-L

△x1	ECN NO:210312 Revise the Operation Temperature	Alice	2021/04/07
△x2	Add the Hi-Temp. Thermoplastic	Andy	2017/09/20
△x1	Revise the drawing	Roy	2017/02/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2268-8036  
 FAX: 886-2-2268-8035

品名 TITLE	D-SUB SLIM RIGHT ANGLE TYPE				
品號 PART NO.	57SDDRXM-09AXXXA-01			繪圖 DRAWN	Jeff 2015/09/08
圖號 DRAWING NO.	GW057-RL453	版本 REV.	D	核對 CHECKED	John 2015/09/08
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/08
公差 TOLERANCE	.X ±0.25 .XX ±0.20	ANGLE:±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION