


SPECIFICATIONS

Current Rating: 5 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C
 Waterproof Level: IP67


MATERIAL

Insulator: PBT
 Contact : Copper Alloy
 Shell: SPCC
 O-Ring: Silicone
 Glue: Black Epoxy
 Screw: Iron


ORDER INFORMATION

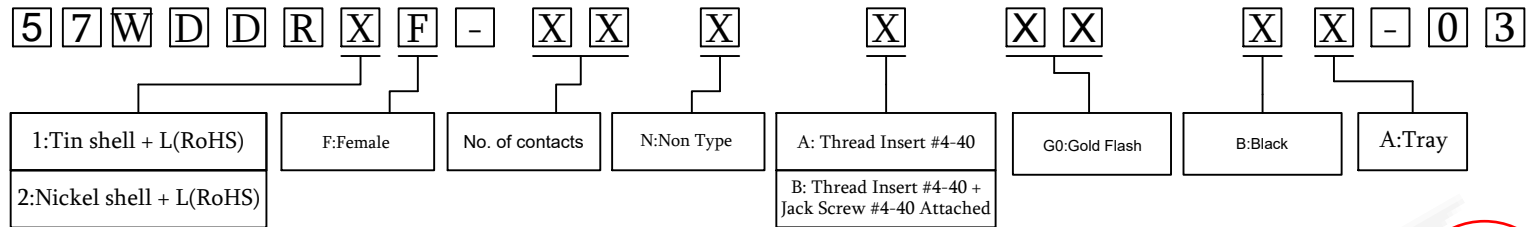


PIN	A±0.38	B±0.38	C±0.25	D±0.25	PCB LAYOTU E±0.13
09	39.60	30.80	25.00	16.30	11.08
15	48.20	39.20	33.30	24.80	19.39
25	61.60	53.04	47.04	38.30	33.24
37	78.00	69.40	63.50	54.80	49.86

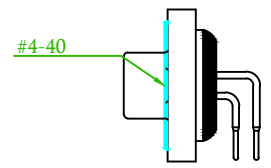


57WDDRXF-XXXAXXXA-03
Thread Insert #4-40

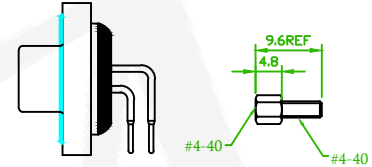




57WDDRXF-XXXBXXA-03
Thread Insert #4-40
+ Jack Screw #4-40 Attached

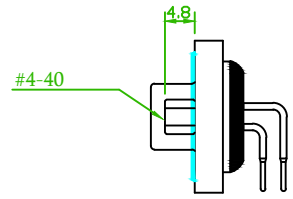

57WDDRXF-XXXCXXA-03
Thread Insert #4-40 UNC + Jack
Screw #4-40 UNC Removable



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

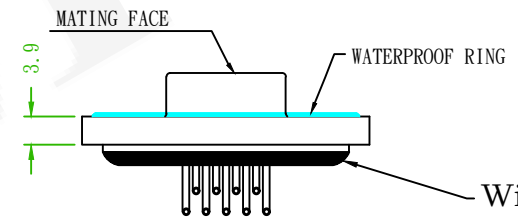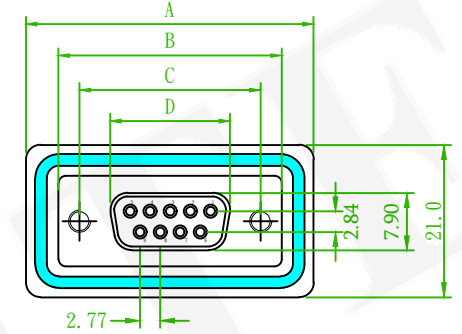

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2268-8036
FAX: 886-2-2268-8035

品名 TITLE	WATERPROOF D-SUB R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	57WDDRXF-XXXXXXXX-03			繪圖 DRAWN	Alice 2023/06/15	
圖號 DRAWING NO.	GW054-AC621	版本 REV.	A	核對 CHECKED	Josh 2023/06/15	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/15	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE