

SPECIFICATIONS


Current Rating: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature: -55°C to +85°C

MATERIAL


Waterproof Rate:IP 67 Min.
 Insulator:PBT, UL94V-0
 Contact:Copper Alloy
 Shell: Steel

ORDER INFORMATION

5 7 W D S S X F - X X N X X X B A - 0 1







◎:Standard Recommend

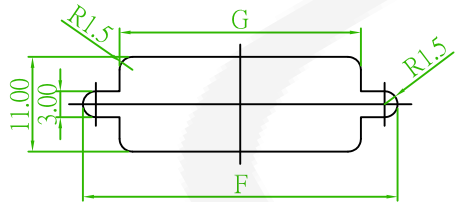

RECOMMENDED PANEL CUT-OUT

PANEL THICKNESS
 Thickness Between 1.2~2.0mm

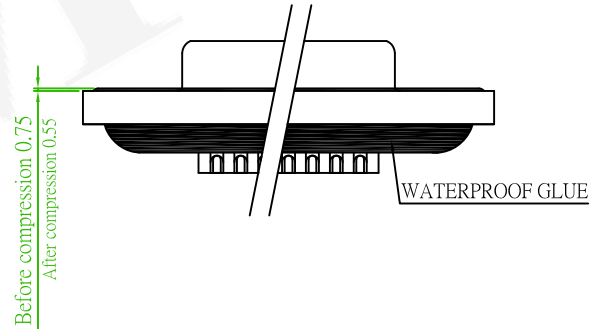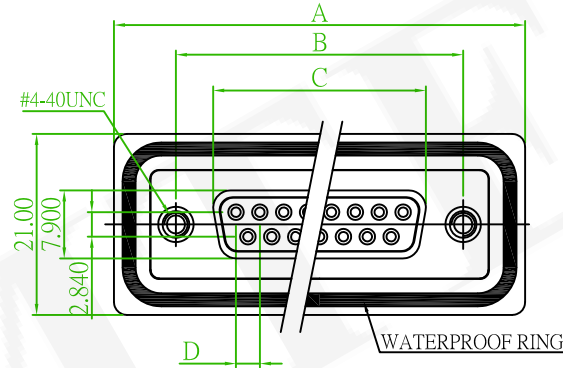

NO.	A ±0.25	B ±0.25	C ±0.13	D ±0.13	F ±0.25	G ±0.25
09	39.40	24.99	16.33	2.77	28.20	20.00
15	47.70	33.32	24.66	2.77	36.50	28.00
25	64.50	47.04	38.38	2.77	51.00	41.50
37	80.95	63.50	54.84	2.77	66.70	58.50

Old Part No.:WDBS-FXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Add the Pin Option:37	Roy	2017/07/06
△	Revise the drawing	Roy	2017/03/24

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	WATERPROOF D-SUB SOLDER TYPE			頁數 Page	1/1
	品號 PART NO.	57WDSSXF-XXNXXXBA-01			繪圖 DRAWN	Jeff 2015/09/08
	圖號 DRAWING NO.	GW037-RL615	版本 REV.	C	核對 CHECKED	John 2015/09/08
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	John 2015/09/08
	公差 TOLERANCE	.XX ±0.25 .XXX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	