

SPECIFICATIONS

Current Rating: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature: -55°C to +85°C

MATERIAL

Waterproof Rate:IP 67 Min.
 Insulator:PBT, UL94V-0
 Contact:Copper Alloy
 Shell: Steel

ORDER INFORMATION

5 7 W D S S X M - 3 7 N X X X B A - 0 1

1:Tin shell + L(RoHS)
 2:Nickel shell + L(RoHS)

M:Male

No. of contacts

N:Non


A:Rivet #4-40
 B:Rivet & jack screw attached

◎G0:Gold Flash
 GD:Gold 30u"



◎B:Black insulator

A:Tray


◎:Standard Recommend

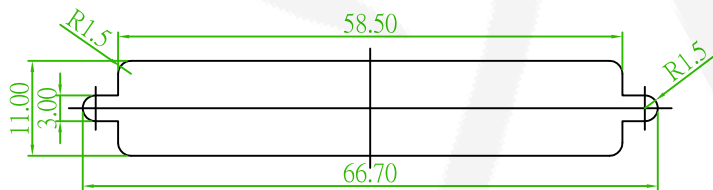

RECOMMENDED PANEL CUT-OUT

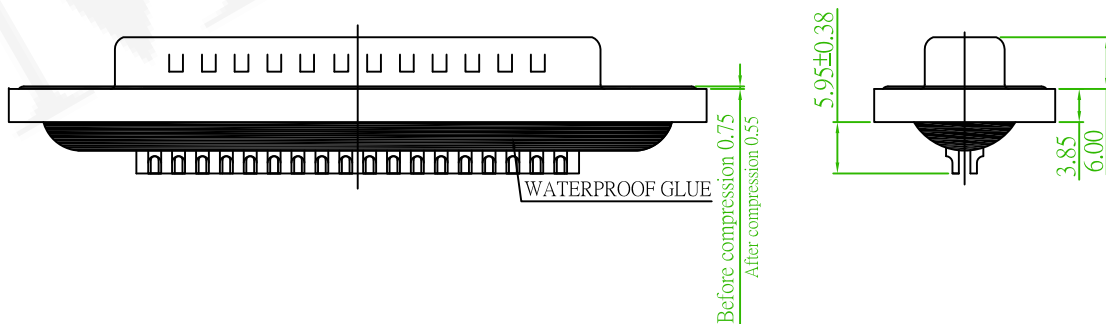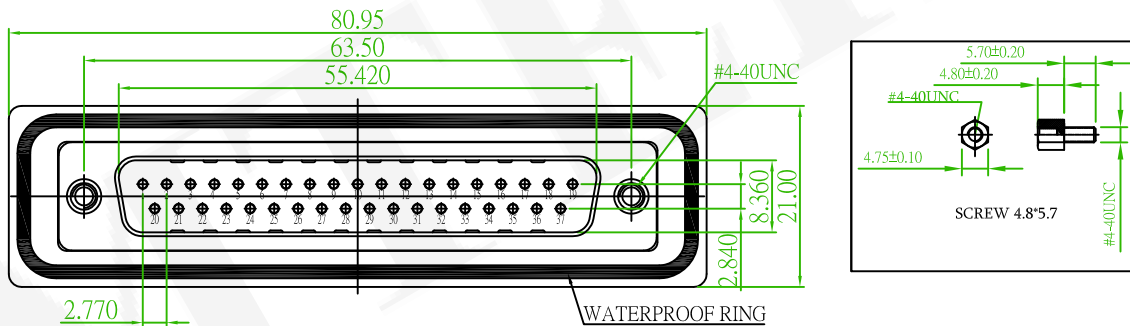

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	WATERPROOF D-SUB SOLDER TYPE			頁數 Page	1/1
	品號 PART NO.	57WDSSXM-37NXXXBA-01			繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GW037-RL845	版本 REV.	A	核對 CHECKED	Carol
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason
	公差 TOLERANCE	.XX ±0.25 .XXX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	