



SPECIFICATIONS

Current Rating: 5 Amp
 Insulator Resistance: 5000MΩ min.
 Dielectric Withstanding Voltage: AC 1000V min.
 Contact Resistance: 10mΩ max.
 Operating Temperature: -55°C - +85°C

MATERIAL

Insulator: PBT, UL94V-0
 Terminal: Brass



ORDER INFORMATION

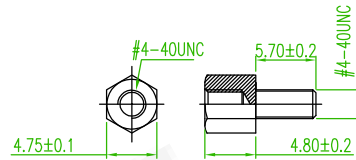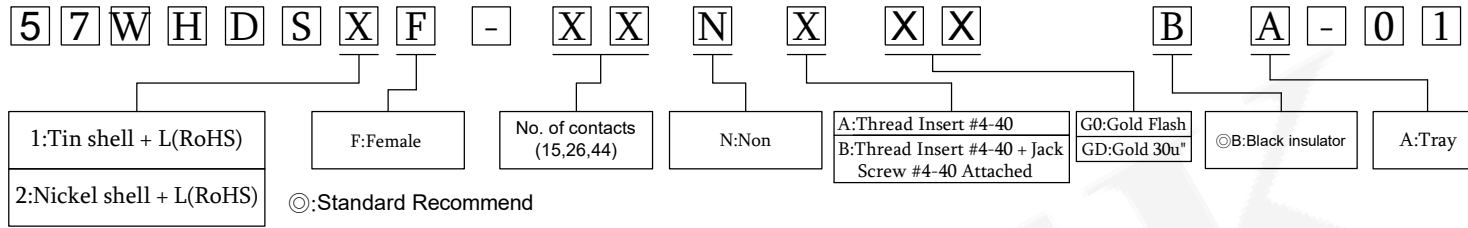

B: Thread Insert #4-40 + Jack Screw #4-40 Attached

NO.	A ±0.25	B ±0.25	C ±0.13	D ±0.13	E ±0.25	F ±0.25	G ±0.25
15S	39.40	24.99	16.33	2.29	0.25	28.20	20.00
26S	47.70	33.32	24.66	2.29	0.51	36.50	28.00
44S	64.50	47.04	38.38	2.29	0.51	51.00	41.50


NO.	Total Mating Force	Total Unmating Force
15PIN	7.2 Kgf Max.	1.2 Kgf Min.
26PIN	12.7 Kgf Max.	2.1 Kgf Min.
44PIN	20.8 Kgf Max.	3.5 Kgf Min.

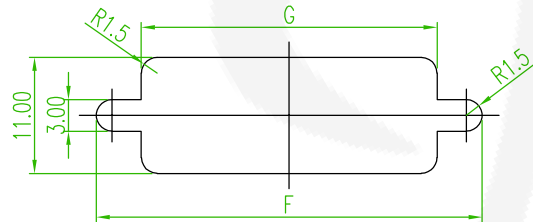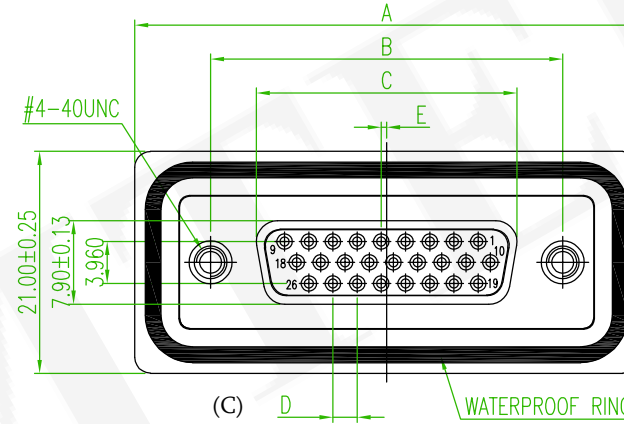



RECOMMENDED PANEL CUT-OUT



Screw L=5.7 For Panel Thickness Between 1.2~2.0mm



Recommended PCB Layout (PCB TOLERANCE ±0.05)

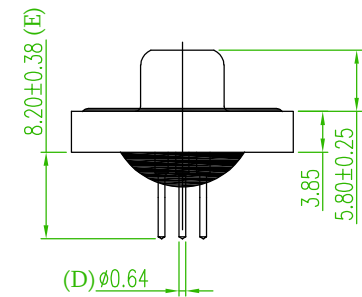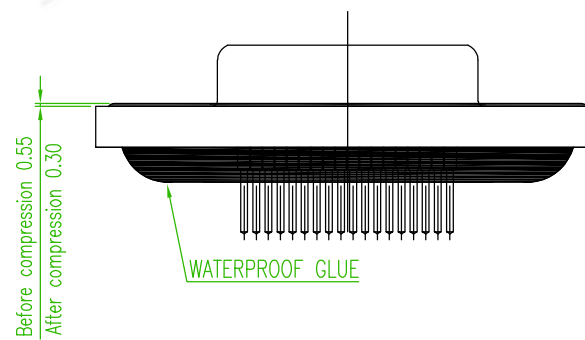

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE	WATERPROOF D-SUB DIP TYPE					
				品名 TITLE		WATERPROOF D-SUB DIP TYPE			
品號 PART NO.		57WHDSXF-XXNXXXBA-01		繪圖 DRAWN	Benson			2021/01/06	
圖號 DRAWING NO.		GW037-BN429		版本 REV.	A	核對 CHECKED	Josh		
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED	Josh		
公差 TOLERANCE		.X ± 0.38 .XX ± 0.25		單位 UNIT	mm	第三 ANGLE PROJECTION			

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2268-8036
 FAX: 886-2-2268-8035