


SPECIFICATIONS

Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105 °C

MATERIAL


Insulator: LCP + 30% G.F, UL94V-0
Cover: PBT + 30% G.F, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

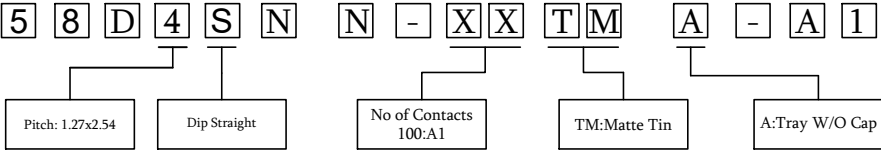


AMTEK 糧德
2022.08.18
Released DCC

No. of Contacts	Dim. A	Dim. B	Dim. C
10	11.13	5.08	6.76
20	17.48	11.43	13.11
26	21.29	15.24	16.92
30	23.83	17.78	19.46
40	30.18	24.13	25.81
50	36.53	30.45	32.16
60	42.88	36.83	38.51
68	47.96	41.91	43.59
70	49.23	43.18	44.86
72	50.50	44.45	46.13
80	55.58	49.53	51.21
90	61.93	55.88	57.56
100	68.28	62.23	63.91

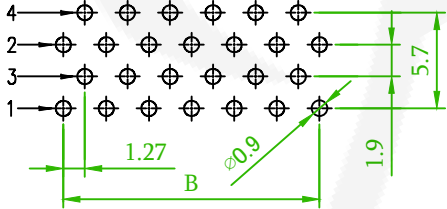

Recommended P.C.B Layout (Top Side)
(PCB BOAED TOLERANCE±0.05)

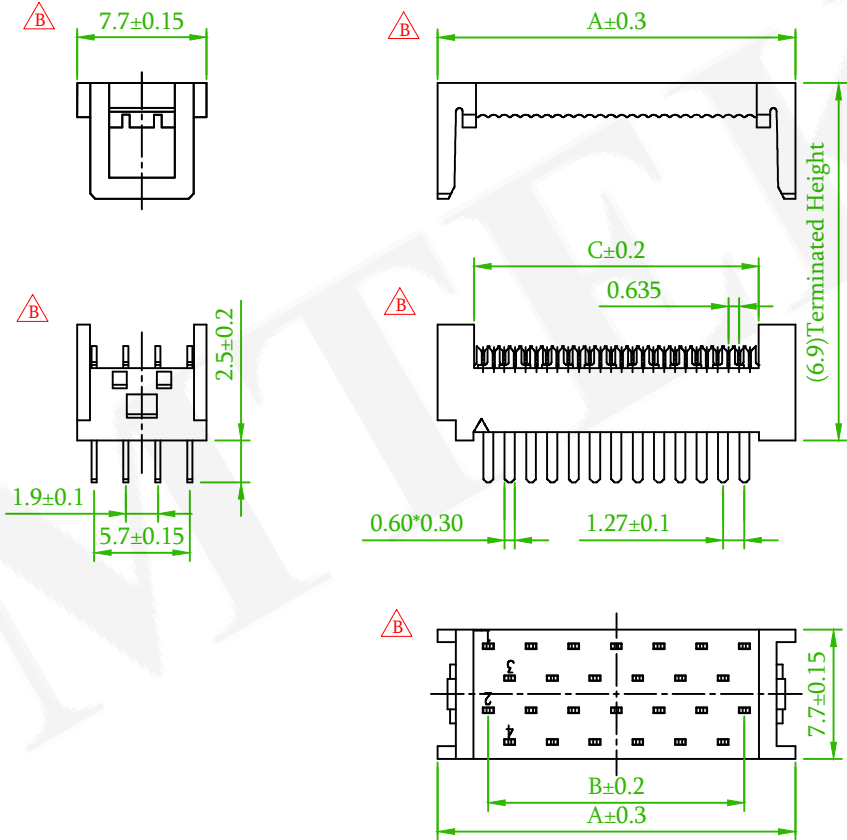

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DIP PLUG 1.27mm				頁數 Page	1/1
品號 PART NO.	58D4SNN-XXTMA-A1				繪圖 DRAWN	Joe 2010/06/29
圖號 DRAWING NO.	GN003-AA001	版本 REV.	B	核對 CHECKED	Sinnys 2010/06/29	
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	承認 APPROVED	James 2010/06/29	
公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.:220122 Revise the drawing	Alice	2022/02/14
	ECN NO. OR DESCRIPTION	REVISED	DATE