

SPECIFICATION

Current Rate:1 AMP

Insulation Resistance:1000 MΩ Min

Contact Resistance:20m Ω Max

Dielectric voltage:500V AC for one minute

Operation Temperature:-40°C to +105 °C

MATERIAL

Insulator:PBT+30%Glass Fiber(UL94V-0)

Contact Pin:Copper Alloy

Color:Black

ORDER INFORMATION

©:Standard Recommend

5 8 I 2 D C

D:IDC Type





B:With Bump,W/O SR
D:W/O Bump,W/O SR

No. of contacts
(6P~64P)


S0:Selective
SB:Selective 10u"
SF:Selective 15u"
SD:Selective 30u"

A:Tray, W/O Cap


1:Black Insulator
2:Gray Insulator

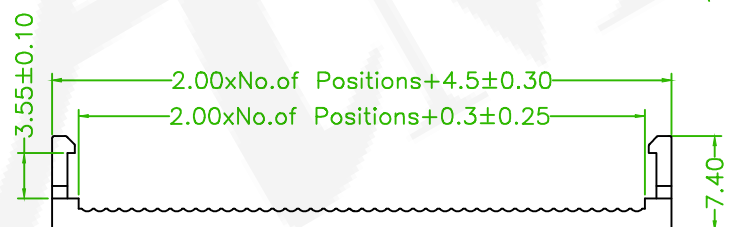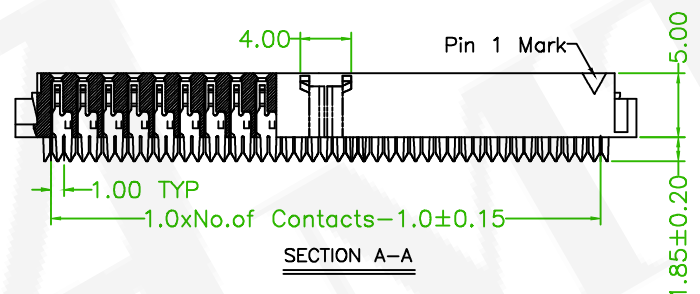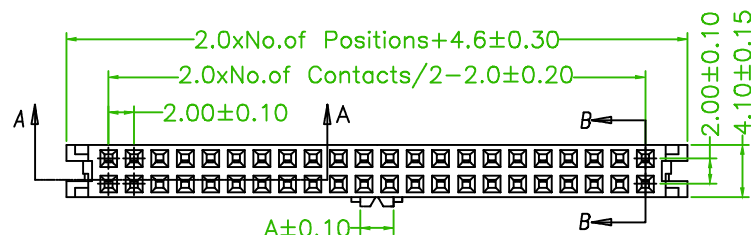

SECTION B-B



B:With Bump,W/O SR



D:W/O Bump,W/O SR

Pin No.	DIM"A"
8P~64P	2.60
6P	2.00



AMTEK 耀德
2022.05.06
Released DCC

Old Part No.:IDC2B-XX-X2-L

△	Add the plated option	Alice	2022/05/06
△	Revised the Part No.:58I2DCX-XXS0A-1->58I2DCX-XXS0A-X	C	2016/10/13 Jeff
△	Revised the Drawing	B	2016/07/07 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2268-8036
FAX: 886-2-2268-8035

品名 TITLE	IDC SOCKET 2.0mm(F Type)				
品號 PART NO.	△△58I2DCX-XXXXA-X	繪圖 DRAWN	Jeff 2015/09/08		
圖號 DRAWING NO.	GN003-AB268	版本 REV.	D	核對 CHECKED	John 2015/09/08
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/08
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	