

SPECIFICATION

Current Rating:1 AMP

Insulation Resistance:1000 M Ω Min.

Contact Resistance:20m Ω Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PBT+30%Glass Fiber,UL94V-0,Black $\triangle B$

Contact Pin:Copper Alloy

ORDER INFORMATION

5 8 I 2 D D X - X X X X T - 1 $\triangle A$

©:Standard Recommend

D:IDC Type



B:With Bump,W/O SR
D:W/O Bump,W/O SR

No. of contacts
(6P~50P)

S0:Selective
SD:30u"

T:Tube, W/O Cap

1:Black Insulator

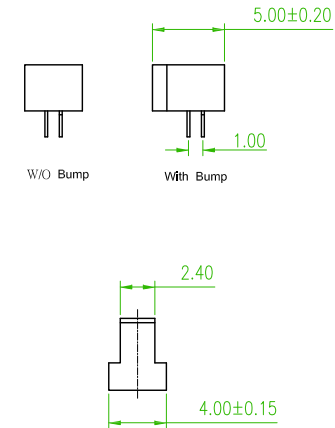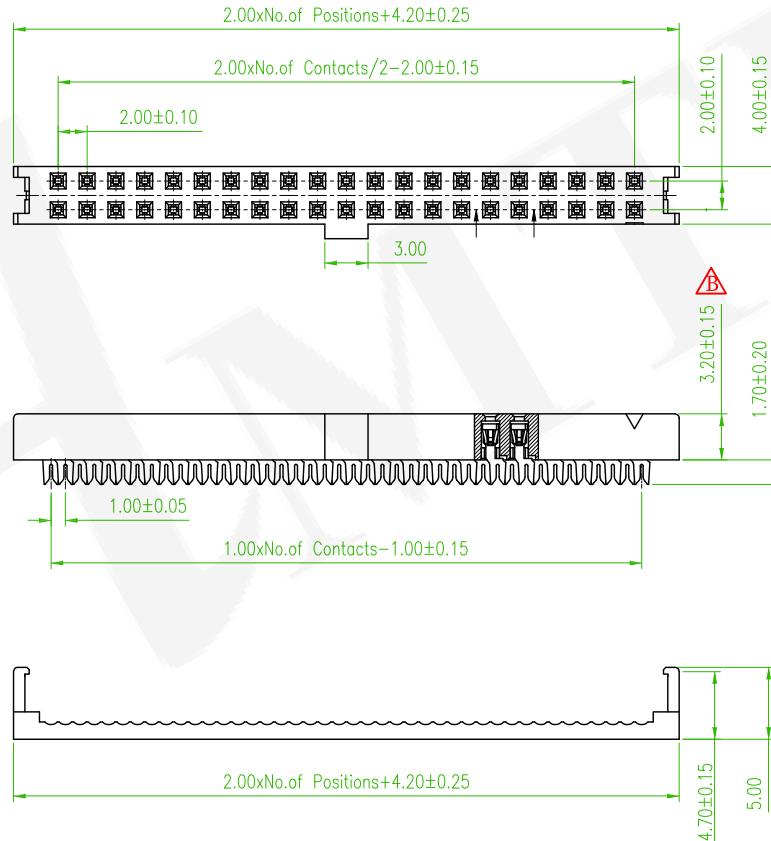

Old Part No.:IDC2C-XX-L

$\triangle A$	Revised the Part No.:58I2DDX-XXXXA-X->58I2DDX-XXXXT-1	C	2016/07/21 Roy
$\triangle C$	Revised the Part No.:58I2DDX-XXXXA-1->58I2DDX-XXXXA-X	C	2016/07/21 Roy
$\triangle B$	Revise the drawing	B	2016/07/21 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	IDC SOCKET 2.00mm					
	品號 PART NO.	$\triangle A$ 58I2DDX-XXXXT-1			繪圖 DRAWN	Jeff 2015/09/08	
	圖號 DRAWING NO.	GN003-RL106		版本 REV.	D	核對 CHECKED	John 2015/09/08
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/09/08
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	