


SPECIFICATION

Current Rate:1 AMP
Insulation Resistance:100 MΩ Min
Contact Resistance:20m Ω Max
Dielectric voltage:500V AC for one minute
Operation Temperature:-40°C to +105 °C

MATERIAL

Insulator:PBT,UL94V-0
Contact Pin: Phosphor Bronze

ORDER INFORMATION

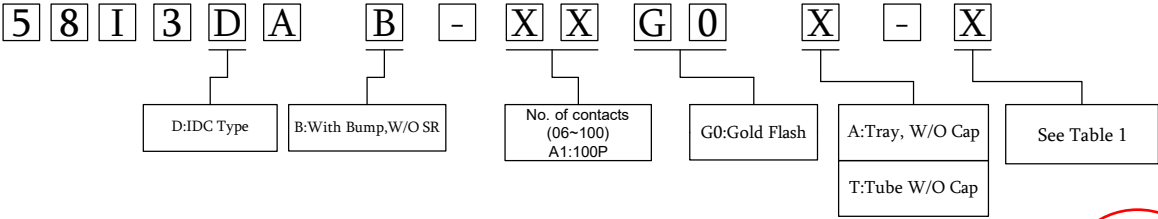

PINS	A	B	C	PINS	A	B	C
6P	8.00	2.54	3.175	30P	23.24	17.78	18.415
8P	9.27	3.81	4.445	34P	25.78	20.32	20.965
10P	10.54	5.08	5.715	40P	29.59	24.13	24.875
12P	11.81	6.35	6.985	44P	32.13	26.67	27.305
14P	13.08	7.62	8.255	50P	35.94	30.48	31.115
16P	14.35	8.89	9.525	52P	37.21	31.75	32.385
18P	15.62	10.16	10.795	60P	42.29	36.83	37.465
20P	16.89	11.43	12.065	64P	44.83	39.37	40.005
22P	18.16	12.70	13.335	68P	47.37	41.91	42.545
24P	19.43	13.97	14.605	80P	54.99	49.53	50.165
26P	20.70	15.24	15.875	100P	67.69	62.23	62.865
28P	21.97	16.51	17.145				



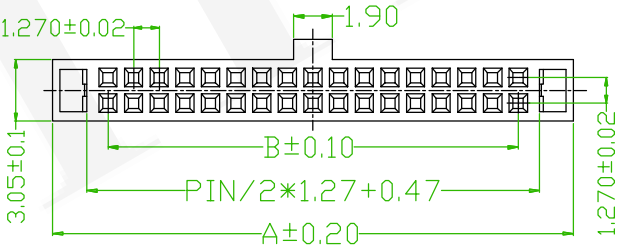


Table 1				
Part No.	Cover	No. of Pin	Dim L	Dim H
58I3AB-XXG0X-1	Standard	6P~50P	5.00	1.85
58I3AB-XXG0X-2	Thickened	52P~100P	5.50	2.35

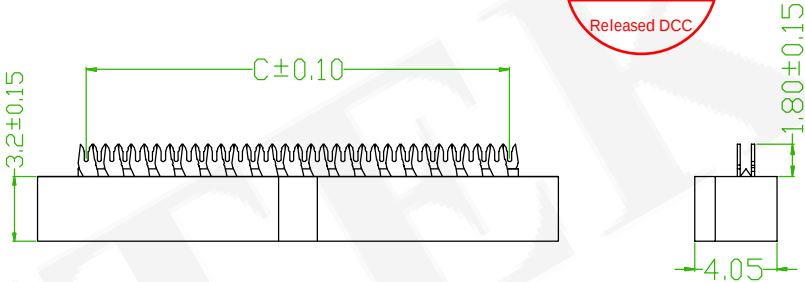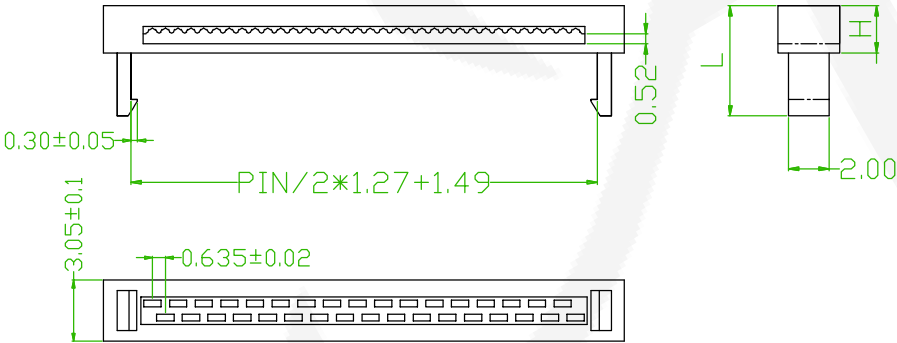

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	ECN NO.:211219 Part no. 58I3DAX-XXXXA-1->58I3DAB-XXG0X-X(1,2)	Benson	2022/01/13

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	IDC Socket 1.27x1.27mm				
	品號 PART NO.	58I3DAB-XXG0X-X(1,2)			繪圖 DRAWN	Benson 2022/01/13
	圖號 DRAWING NO.	GN046-BN871	版本 REV.	A	核對 CHECKED	Josh 2022/01/13
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/01/13
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	