

SPECIFICATION

Current Rate:0.5 AMP

Insulation Resistance:1000M Ω MinContact Resistance:30m Ω Max

Dielectric voltage:300V AC for one minute

Operation Temperature:-55°C to +105°C

MATERIAL

Insulator:PBT+30%G.F,UL 94V-0

Contact Pin:Copper Alloy.

ORDER INFORMATION

5 8 I 4 D A

X

-

X

X

X

X

A

-

1

©:Standard Recommend

D:IDC Type

A:With Bump,With SR
B:With Bump,W/O SR

No. of contacts



G0:Gold Flash
S0:Selective
T0:Tin Plated

A:Tray, W/O Cap

1:Black Insulator

Amtek
2017.08.21
文管中心

PINS	A	B	C
10P	11.25	8.35	5.08
12P	12.52	9.62	6.35
14P	13.79	10.89	7.62
16P	15.06	12.16	8.89
20P	17.60	14.70	11.43
24P	20.14	17.24	13.97
26P	21.41	18.51	15.24
30P	23.95	21.05	17.78
34P	26.49	23.59	20.32
40P	30.30	27.40	24.13
50P	36.65	33.75	30.48
60P	43.00	40.10	36.83
100P	68.40	65.50	62.23

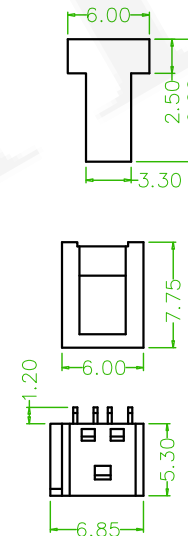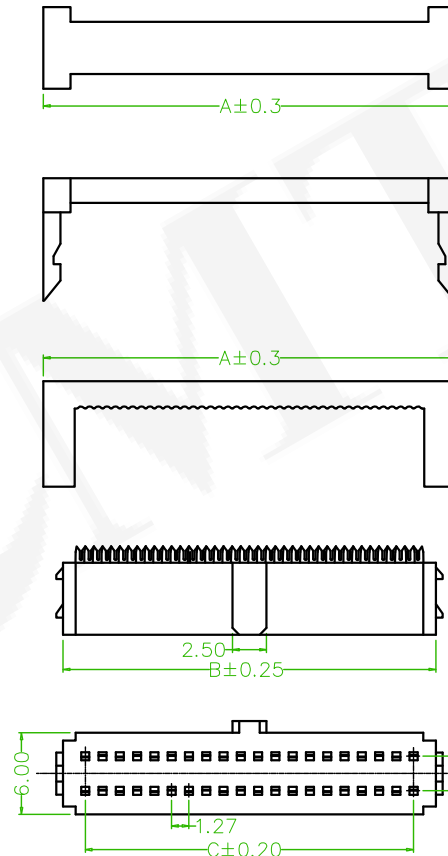

Old Part No.:IDC3-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	Revised the Part No.:58I4DBX-XXXXA-1->58I4DAX-XXXXA-1	C	2016/10/13 Jeff
△	Revised the drawing	B	2016/07/28 Roy


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	IDC SOCKET 1.27*2.54mm			頁數 Page	1/1
品號 PART NO.	58I4DAX-XXXXA-1			繪圖 DRAWN	Mia 2016/07/05
圖號 DRAWING NO.		版本 REV.	C	核對 CHECKED	Emily 2016/07/05
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/05
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	