

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute


Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Nylon 46., UL 94V-0


Contact Pin: Copper Alloy

ORDER INFORMATION





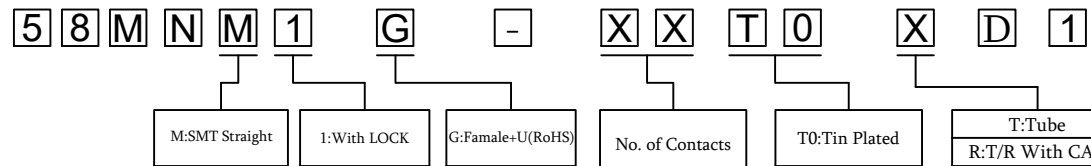


AMTEK 耀德
2022.08.18
Released DCC


PINS	A	B
4	9.68	3.81
6	12.23	6.35
8	14.77	8.89
10	17.31	11.43
12	19.85	13.97
14	22.39	16.51
16	24.93	19.05
18	27.47	21.59
20	30.01	24.13
22	32.55	26.67
24	35.09	29.21
26	37.63	31.75

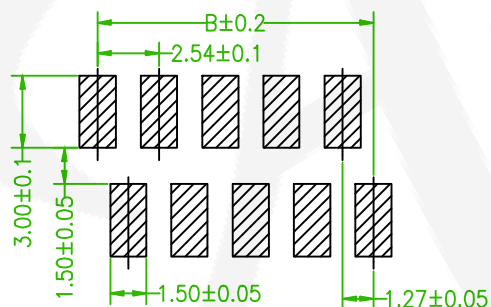

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

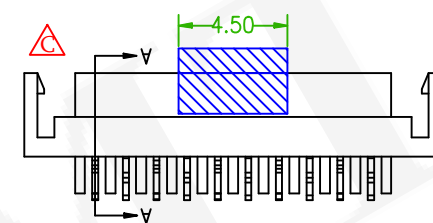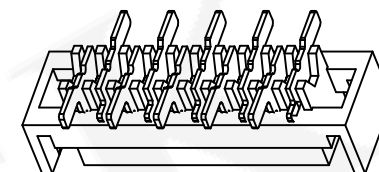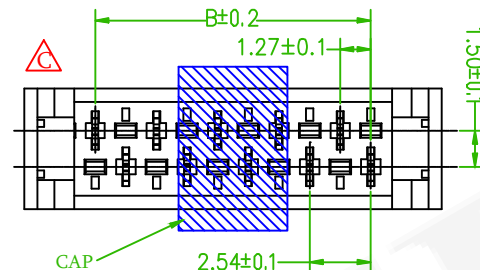

SECTION A-A

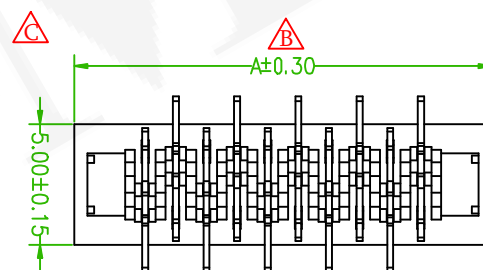

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x5	ECN NO.:220122 Revise the drawing	Alice	2022/02/14
△x6	Revise the tolerance, Revise the Part No, Add the packing option	Nick	2019/06/03

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2268-8036
FAX: 886-2-2268-8035

品名 TITLE	MINI MATCH V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	△B 58MNM1G-XXT0XD1			繪圖 DRAWN	Daneil 2019/02/25	
圖號 DRAWING NO.	GN046-DA013			版本 REV.	C	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20 △B			單位 UNIT	mm	THIRD ANGLE PROJECTION