

ORDER INFORMATION

5 B B 1 2 1 C 3 4 F - X X X X U H - 0 X

12: Pitch 1.25 mm	34:3.4mm	F: Female	No. of contacts 04-08,10, 17, 20	G0:Gold Flash GB:10u"	GF:15u" GD:30u"	RoHS	H:T/R W/O Cap	01:W/O Peg 02:With Peg
				T0:Tin Plated				







SPECIFICATION




Current Rating: 0.5 AMP
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25 °C to +85 °C

MATERIAL

Insulator: High Temperature Thermoplastic, UL 94V-0, Black
 Contact Pin: Copper Alloy

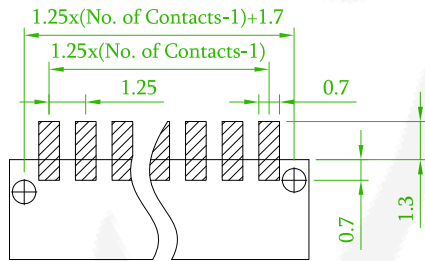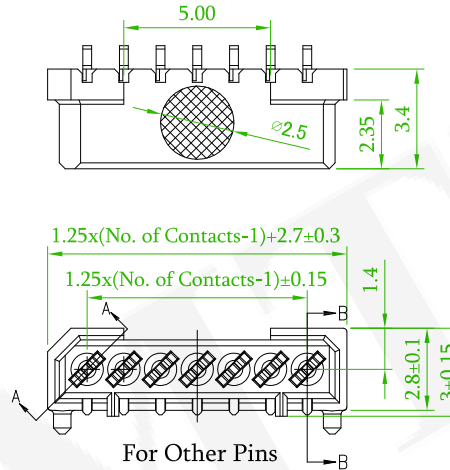

P.C.B. LAYOUT
TOLERANCE: ± 0.1

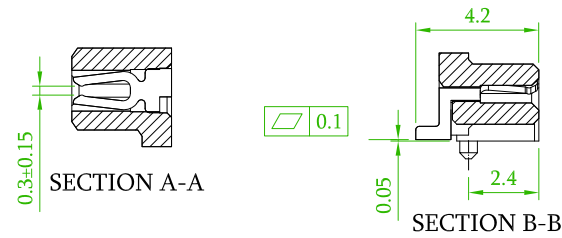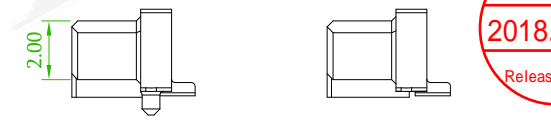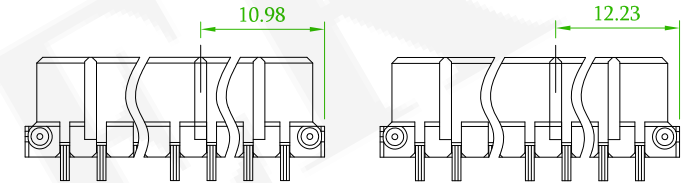

B x1	Add a drawing.	Gary	2018/11/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	1.25mm BOARD TO BOARD FEMALE R/A SMT TYPE			頁數 Page	1/1
品號 PART NO.	5BB121C34F-XXXXUH-0X			繪圖 DRAWN	Gary
圖號 DRAWING NO.	GN003-GA449	版本 REV.	B	核對 CHECKED	Josh
客戶品號 CUSTOMER P/N		比例 SCALE	4 : 1	承認 APPROVED	Jason
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	