


SPECIFICATION

Current Rating: 0.5 to 1.0 AMP
 Insulation Resistance: 10000MΩ Min.
 Contact Resistance: 25mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55 °C to +125 °C

MATERIAL


Insulator: LCP, Black
 Contact Pin: Phosphor Bronze

ORDER INFORMATION

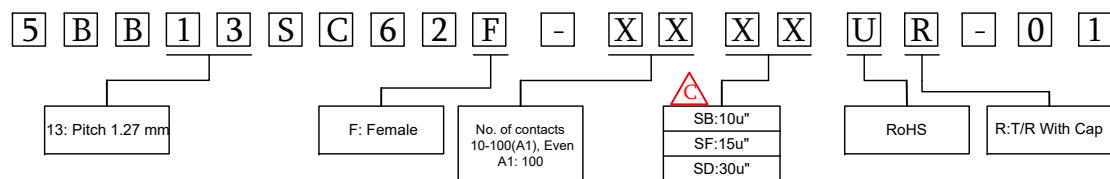






△180°

Male P/N	Female P/N	Mating Height
5BB13SC67M-XXXXXUR-01	5BB13SC62F-XXXXXUR-01	8.0
5BB13SC82M-XXXXXUR-01	5BB13SC62F-XXXXXUR-01	9.5
5BB13SC99M-XXXXXUR-01	5BB13SC62F-XXXXXUR-01	11.1



△90°

Male P/N	Female P/N	Mating Height
5BB13SC82P-XXXXXUR-01	5BB13SC62F-XXXXXUR-01	9.4

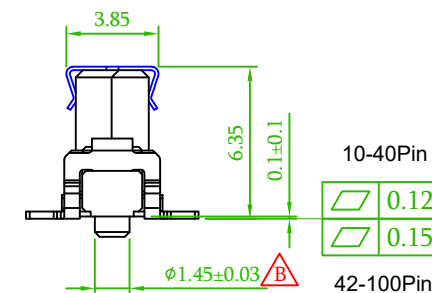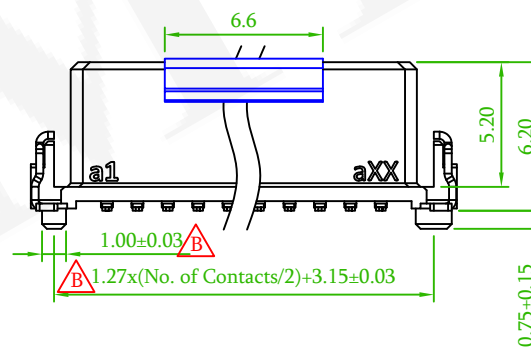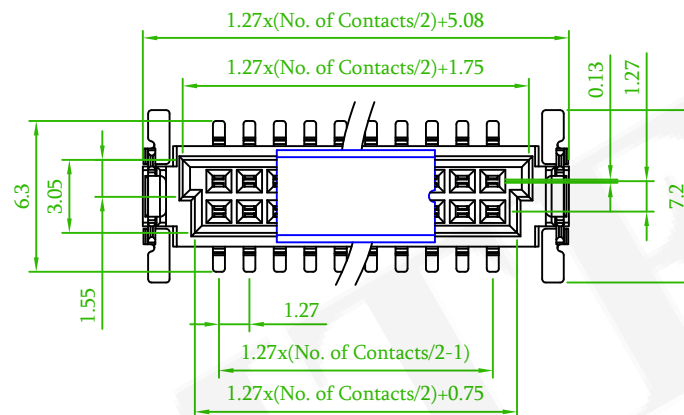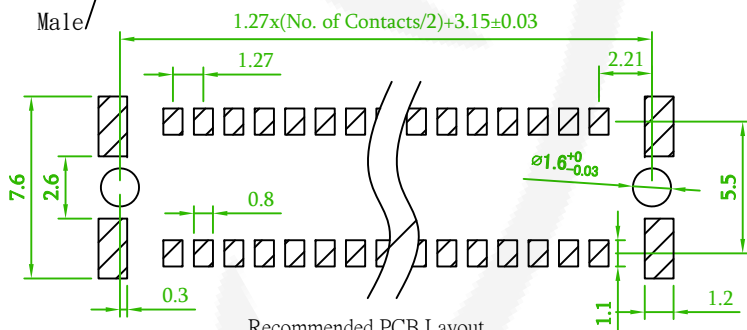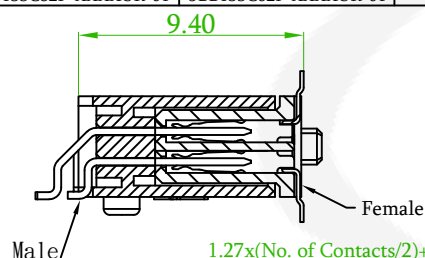

△Dx2	ECN-200110.: Add the M/H	Benson	2020/03/12
△Cx1	ECN-191209: Cancel plated option(S0.S3.SA)	Nick	2020/01/07
△Bx3	QEC NO.: 180803, revise dimensions, tolerances, add the dimension.	Gary	2018/08/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.27mm BOARD TO BOARD FEMALE V/T SMT TYPE				頁數 Page	1/1
	品號 PART NO.	5BB13SC62F-XXXXXUR-01				繪圖 DRAWN	Gary 2018/05/11
	圖號 DRAWING NO.	GN003-GA605	版本 REV.	D	核對 CHECKED	Josh 2018/08/07	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/07	
	公差 TOLERANCE	± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

AMTEK 耀德
 2020.05.25
 Released DCC