

SPECIFICATION

Current Rating: 3 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ◎:Standard Recommend

Operation Temperature: -40°C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 1 E M A 8 8 - X X X X X X U XXX095 - 0 0

No. of contacts
(06.08.10.12.14.16
.18.20.24.26.30.
34.40.50.60.64)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated
TE:Tin 200u"

S0:Selective
SA:5u"
SB:10u"
SC:20u"
SD:30u"

5:W/O peg
6:With peg



T:Tube, W/O Cap
C:Tube, With Cap
B:Bag Package

RoHS



EX:066095
L1:6.6(066)
B:9.5(095)



No. of Contact	Dim(A)
6-8P	4.0
10-64P	4.4

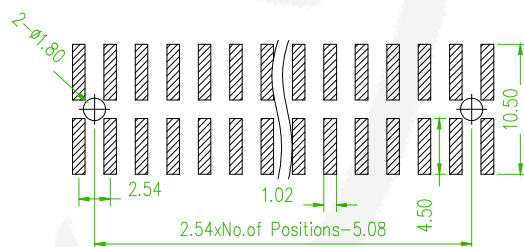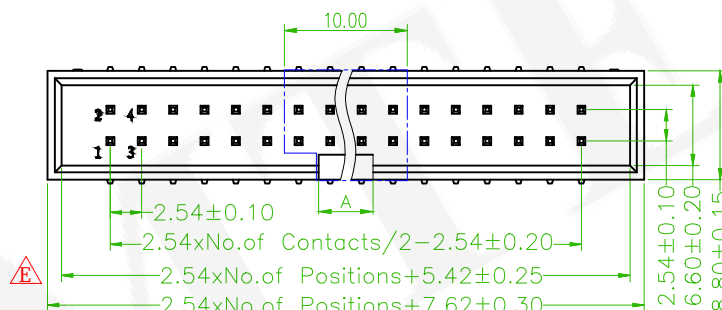

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

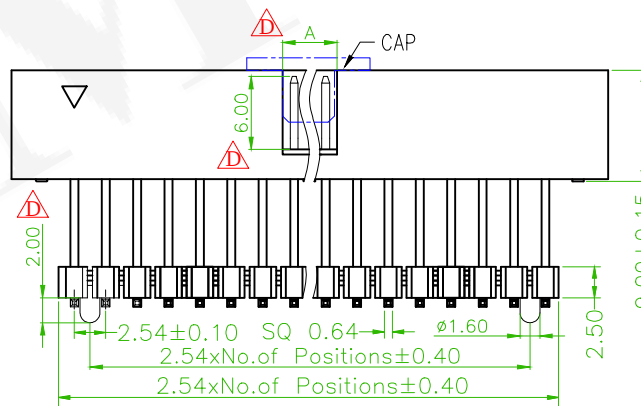

Old Part No.:BH1EM-XX-U

△x2	ECN NO.:200913 Revise the drawing	Alice	2020/10/12
△x7	ECN NO.:200802 Revise the drawing	Benson	2020/08/31
△x1	Revise the Layout dimension	Benson	2020/06/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm BOX HEADER V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5BH1EMA88-XXXXXXUXXX095-00				繪圖 DRAWN	Jeff 2015/09/03
圖號 DRAWING NO.	GN003-RR403	版本 REV.	E	核對 CHECKED	Josh 2018/04/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/04/12	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	.X° ±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	