

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25°C to +85 °C




MATERIAL

Insulator: PBT+30%G.F, UL94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 1 I S A N N - X X X X X X L - 0 X




◎:Standard Recommend

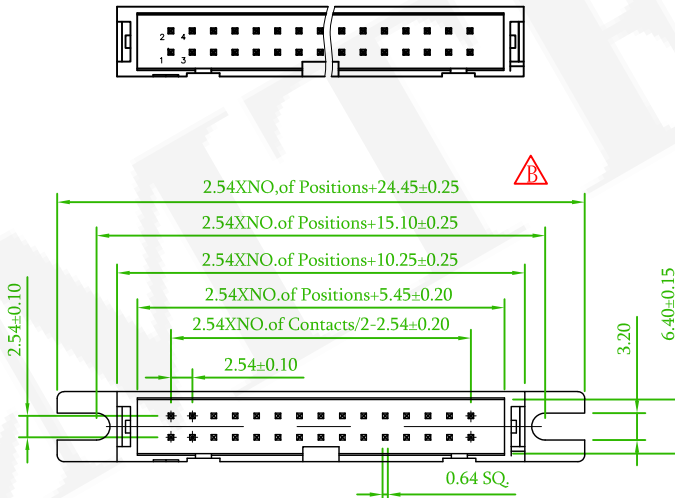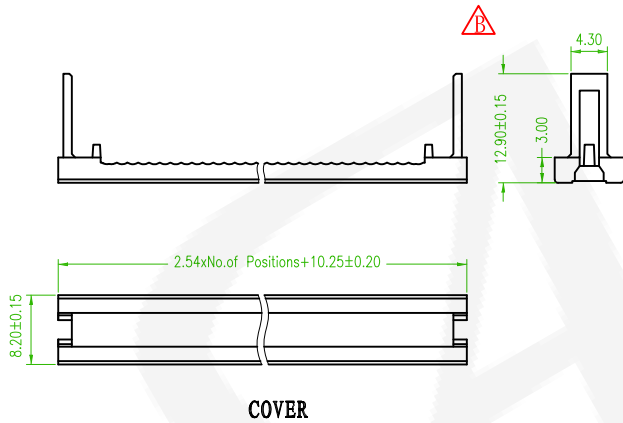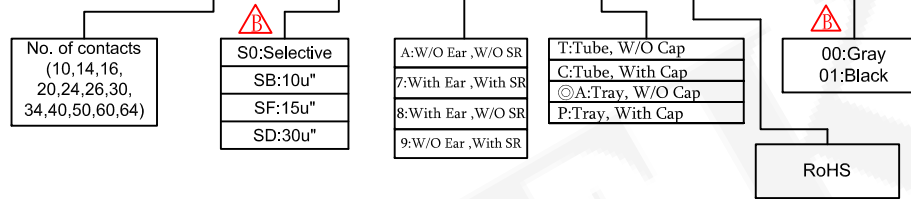

W/O Ear

With Ear

10~16 PIN Without A

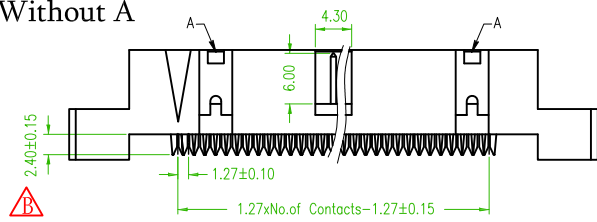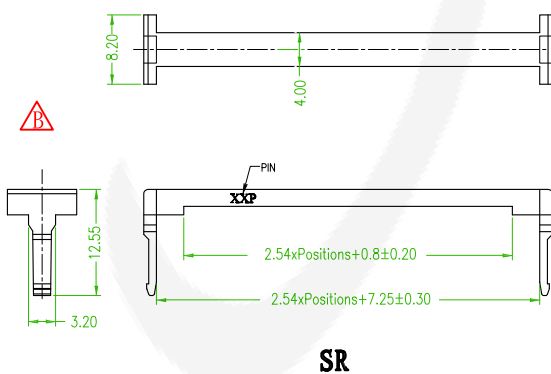

Old Part No.:BH1I-XX-1-L

△x1	Add the notes	Nick	2019/06/11
△	Revised the Drawing	B	2016/06/30 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	BOX HEADER 2.54mm			頁數 Page	1/1
	品號 PART NO.	5BH1ISANN-XXXXXXL-0X			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.	GN003-NI199	版本 REV.	C	核對 CHECKED	John
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION