

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

*06P~50P: 1 Key Way
 60P and 64P : 3 Key Way





ORDER INFORMATION

5 B H 1 R D C 8 8 - X X X X 5 X U - 0 0

◎:Standard Recommend

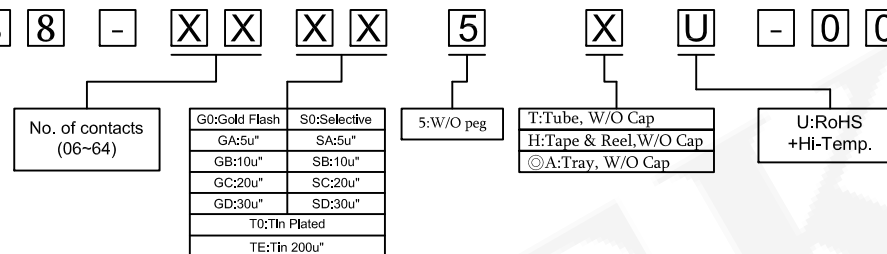

POLES	DIM:(mm)		POLES	DIM:(mm)	
	A	B		A	B
06	5.08	15.24	26	30.48	40.64
08	7.62	17.78	30	35.56	45.72
10	10.16	20.32	32	38.1	48.26
12	12.70	22.86	34	40.64	50.80
14	15.24	25.40	36	43.18	53.34
16	17.78	27.94	40	48.26	58.42
18	20.32	30.48	50	60.96	71.12
20	22.86	33.02	60	73.66	83.82
24	27.94	38.10	64	78.74	88.9

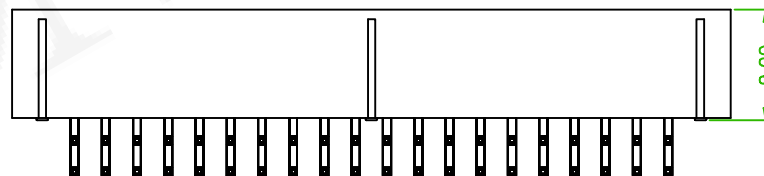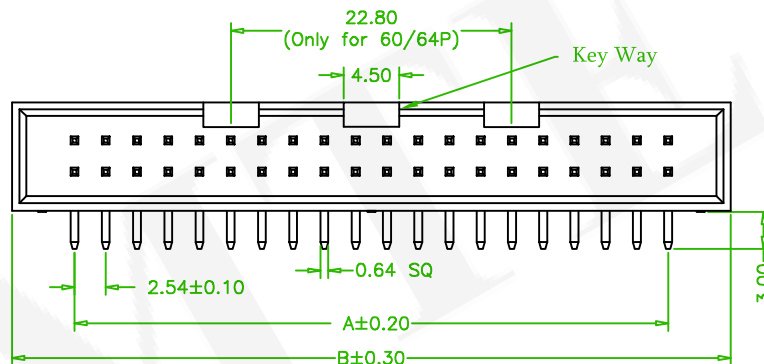

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No.:BH1R-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	BOX HEADER 2.54mm			頁數 Page	1/1	
	品號 PART NO.	5BH1RDC88-XXXX5XU-00			繪圖 DRAWN	Mia	
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Jonny		
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Aaron		
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		