

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ☉:Standard Recommend

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 2 E S A 4 8 - X X X X 5 X U XXXXXX - 0 0

No. of contacts
(10,14,16,20
24,26,30
,34,40,44,50,60)




G0:Gold Flash S0:Selective
GA:5u" SA:5u"
GB:10u" SB:10u"
GC:20u" SC:20u"
GD:30u" SD:30u"
T0:Tin Plated
TE:Tin 200u"

5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap
R:Tape & Reel, With Cap
H:Tape & Reel, W/O Cap
©A:Tray, W/O Cap
P:Tray, With Cap

RoHS

EX:066030
L1:6.6(066)
B:3.0(030)

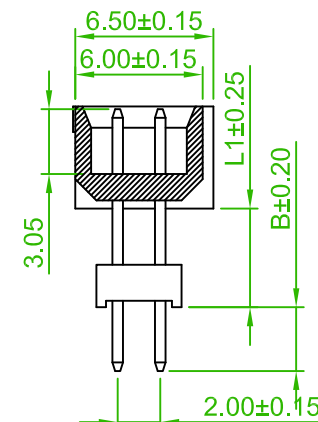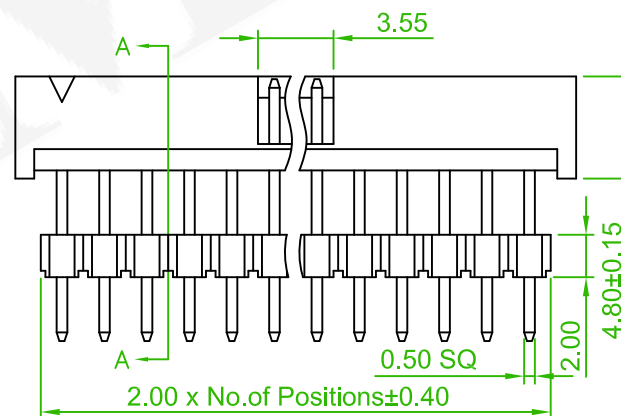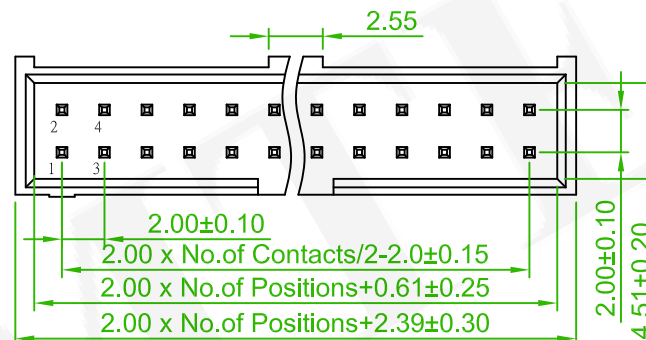

SECTION A-A
Old Part No.:BH2EGS-XX-U



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5BH2ESA48-XXXX5XUXXXXXX-00			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION