

SPECIFICATION

Current Rating: 2 AMP
 Insulation Resistance: 1000 MΩ Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL




Insulator: High Temperature Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION



5 B H 2 E S A 7 2 - X X X X 5 X U XXXXXX - 0 0

©:Standard Recommend

No. of contacts (10,14,16,20,24,26, 30,34,40,44,50,60)	GO:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" TO: Tin Plated TE: Tin 200u"	SO: Selective SA:5u" SB:10u" SC:20u" SD:30u"	5: W/O peg	T: Tube, W/O Cap C: Tube, With Cap	U: RoHS +HI-Temp.	EX:066055 L1:6.6(066) B:5.5(055)
--	---	--	------------	---------------------------------------	----------------------	--

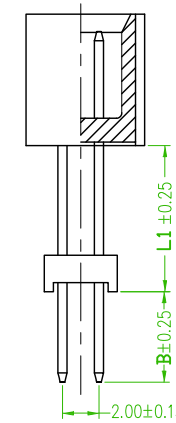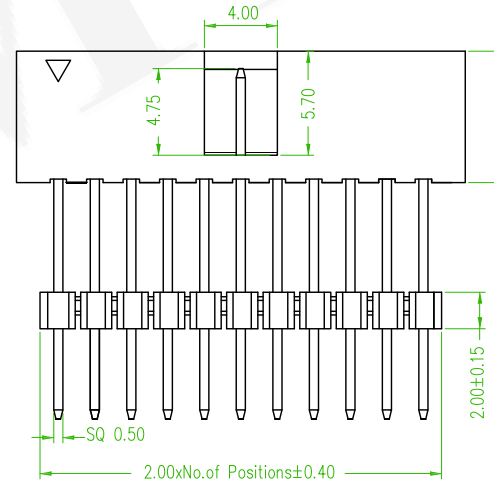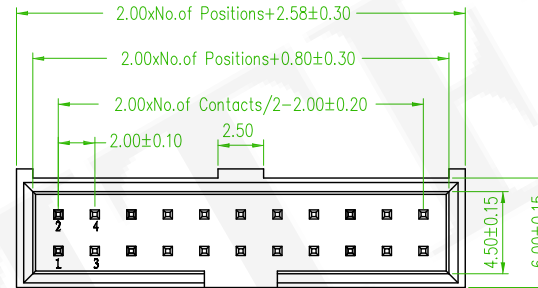

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5BH2ESA72 -XXXX5XUXXXXXX-00				繪圖 DRAWN	Mia
	圖號 DRAWING NO.	GN003-MC197	版本 REV.	A	核對 CHECKED	Jonny	2017/01/06
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	2016/01/06
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE