

SPECIFICATION

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ☉:Standard Recommend

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 2 R D A 4 8 - X X X X 5 X U - 0 0

No. of contacts
(10,14,16,20,24,26,30
,34,40,44,50,60)




G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated
TE:Tin 200u"

S0:Selective
SA:5u"
SB:10u"
SC:20u"
SD:30u"


5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap
A:Tray, W/O Cap
P:Tray, With Cap
M:Tape & Reel, With Film

RoHS

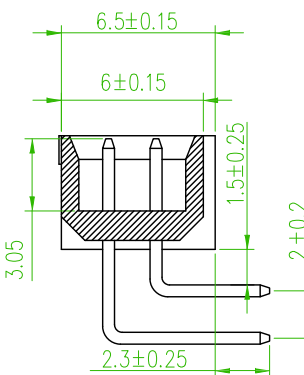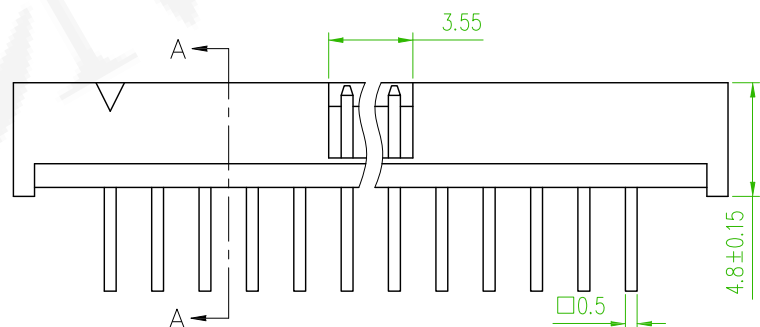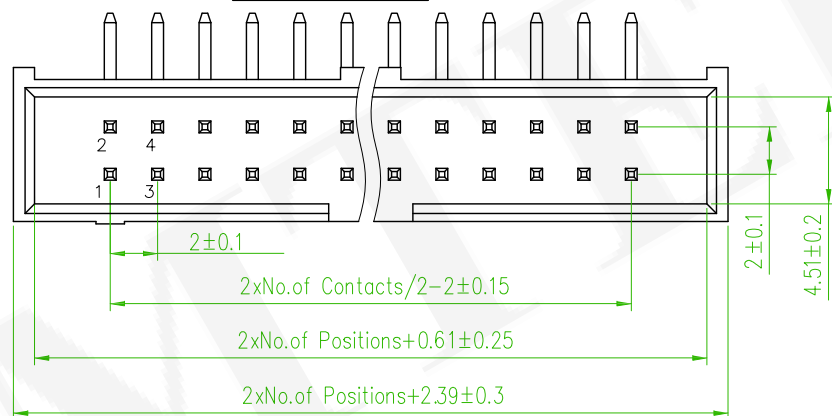

Old Part No.:BH2GR-XX-U

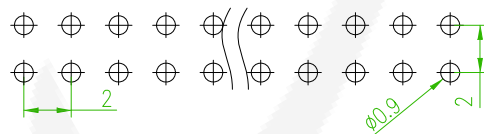

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5BH2RDA48-XXXX5XU-00			繪圖 DRAWN	Jeff 2015/09/03
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/03
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/03
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION