

SPECIFICATION

Current Rating: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 2 R D A 5 6 - X X X X 5 X U - 0 0

No. of contacts (10~68)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	5:W/O peg	T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap A:Tray, W/O Cap P:Tray, With Cap	RoHS
	T0:Tin Plated TE:Tin 200u"				

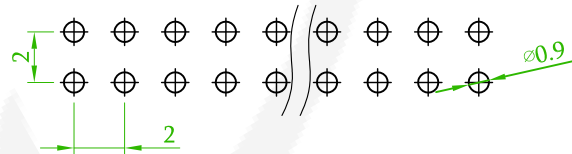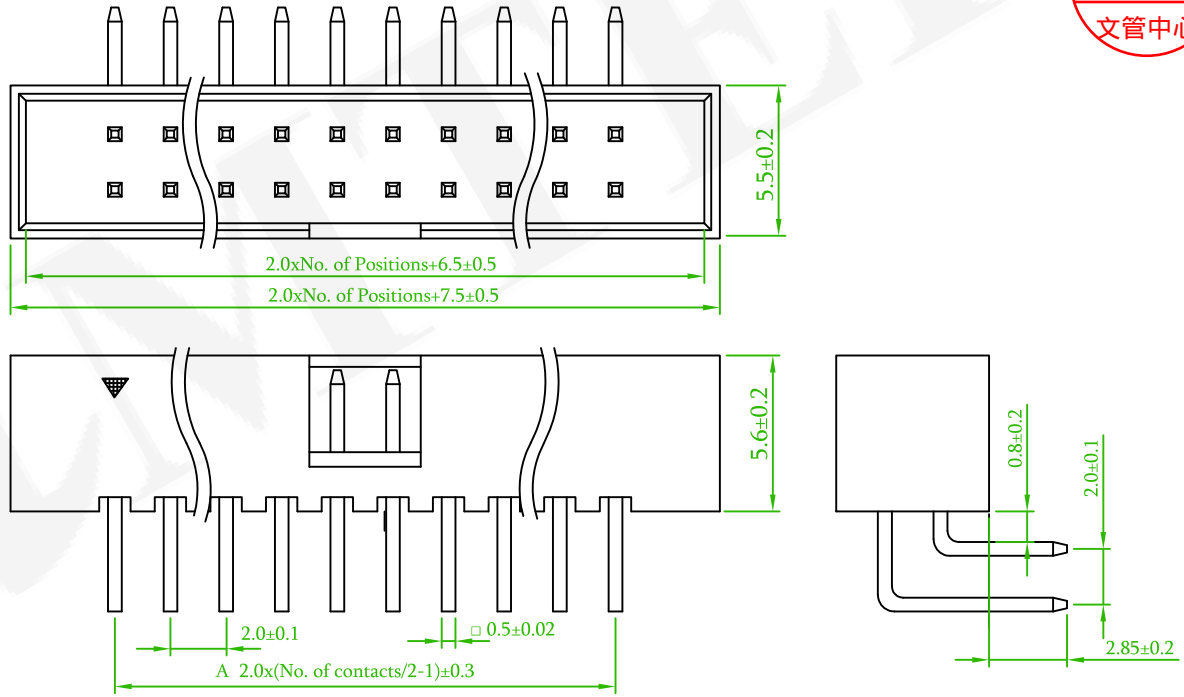

Old Part No.:BH2R-XX-U

Recommended PCB Layout
 (PCB TOLERANCE ± 0.1)

REV.	ECN NO. : 170827, Revise part number: D -> A.	Gary	2017/09/25
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5BH2RDA56-XXXX5XU-00			繪圖 DRAWN	Jeff 2016/04/26
	圖號 DRAWING NO.	GN016-GA656	版本 REV.	B	核對 CHECKED	John 2016/04/26
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/26
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° $\pm 3^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION