

SPECIFICATIONS

Current Rating: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ☉:Standard Recommend

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 2 R D A 6 1 - X X X X 5 T U - 0 0





No. of contacts
(10,14,16,20,24,26
30,34,40,44,50,60)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

5:W/O Peg

T:Tube, W/O Cap

RoHS

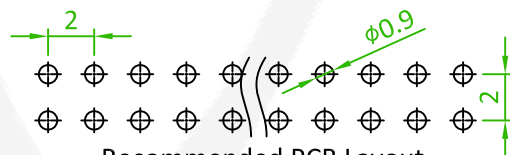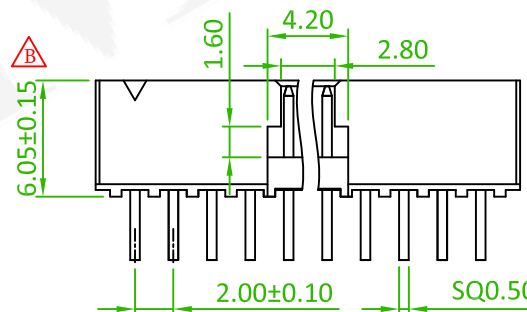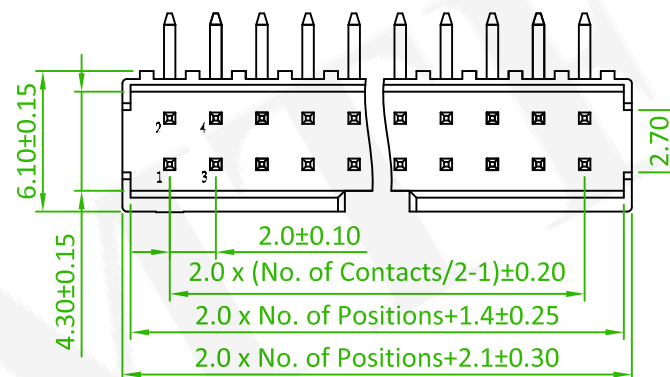

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.:BH2BR-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△Bx1	Revise the Dimension	David	2019/12/25

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5BH2RDA61-XXXX5TU-00				繪圖 DRAWN	Jeff 2016/10/05
	圖號 DRAWING NO.	GN003-DV584	版本 REV.	B	核對 CHECKED	Johnny 2016/10/05	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/05	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		