

ORDER INFORMATION

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ©:Standard Recommend

Operation Temperature: -40°C to +105°C

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

5 B H 2 S D A 6 1 - X X X X 5 T U - 0 0

 	No. of contacts (08,10,12,14,16 20,24,26,30,34, 40,44,50,60)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	



5:W/O Peg

T:Tube, W/O Cap	
-----------------	--



RoHS



Amtek
2018.05.29
文管中心

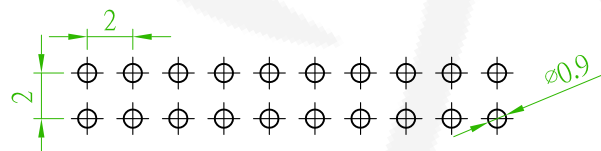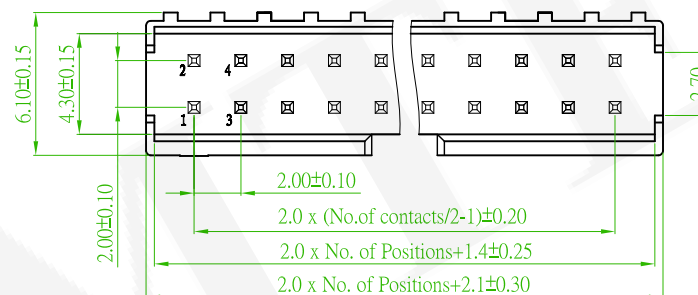

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

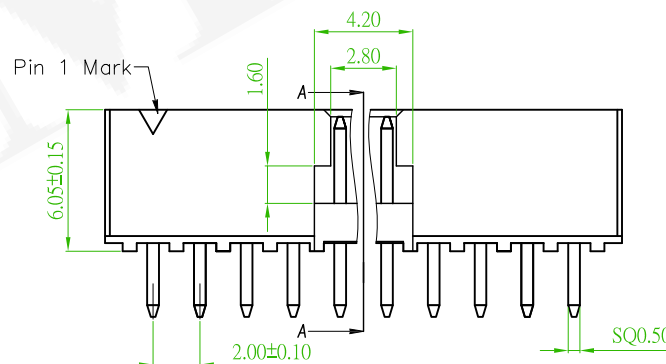

Old Part No.:BH2BS-XX-U

	Add the 12 Pin	Roy	2017/05/22
	ECR/ECN NO.:170525 Add No. of contacts: 08	Gray	2017/05/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm BOX HEADER V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5BH2SDA61-XXXX5TU-00			繪圖 DRAWN	Jeff 2016/10/05	
圖號 DRAWING NO.	GN003-GA398	版本 REV.	C	核對 CHECKED	Josh 2018/05/29	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/29	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		