

ORDER INFORMATION

Contact Pin: Copper Alloy

5 B H 3 E S A 5 7 - X X X X 5 X U XXXXXX - X X

No. of contacts (06,08,10,14,16,20, 24,26,30,32,34,40,44 ,50,60,64,80,100=A1)
--

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap

RoHS

EX:088023
L1:8.8(080)
B:2.3(023)





00: Dim. A=1.0
01: Dim. A=2.5



AMTEK 糧德

(2020.02.26)

Released DCC

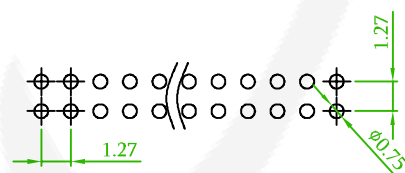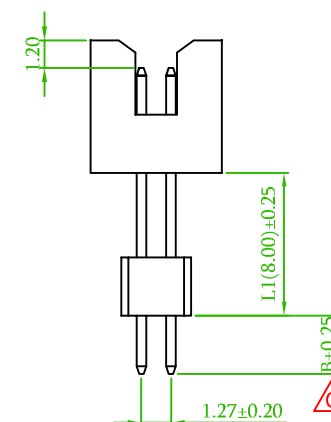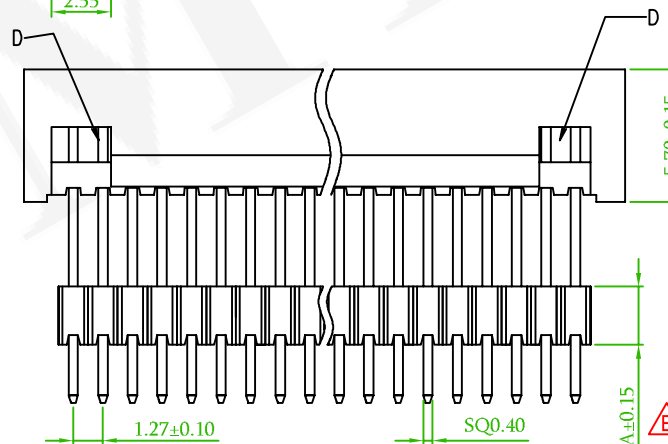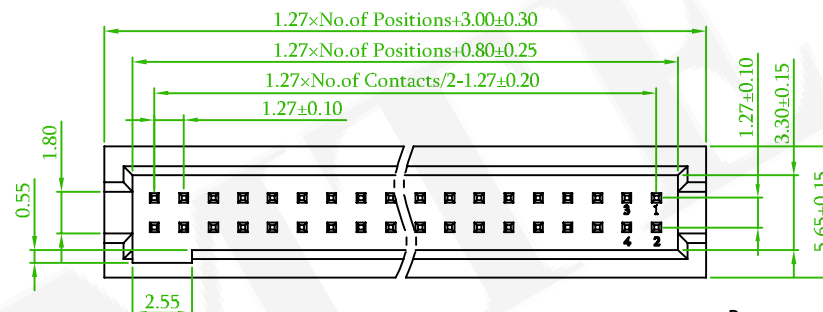

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No.:BH3ES-XX-U

 C x1	Add an option: Dim. B	Josh	2020/02/26
 B x2	Add an option: 01: Dim. A=2.5.	Gary	2018/05/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.27x1.27mm BOX HEADER ELEVATED V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5BH3ESA57 -XXXX5XUXXXXXX-XX			繪圖 DRAWN	Jeff 2015/08/31	
圖號 DRAWING NO.	GN003-GB156	版本 REV.	C	核對 CHECKED	John 2015/08/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		