


SPECIFICATION

Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

ORDER INFORMATION

5 B H 4 R D A 5 7 - X X X X 5 X U - 0 0


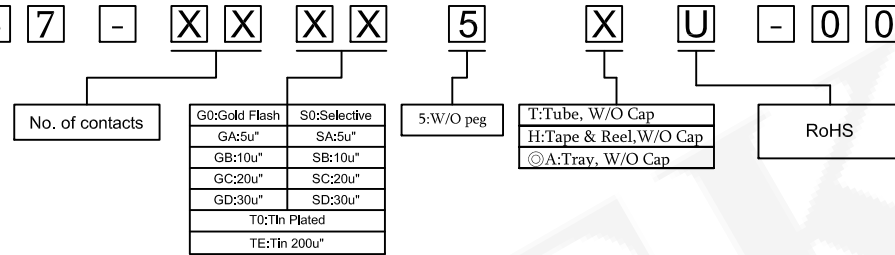


MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy



POS.	DIMENSION		
	A	B	C
6	11.81	10.21	2.54
8	13.08	11.48	3.81
10	14.35	12.75	5.08
12	15.62	14.02	6.35
14	16.89	15.29	7.62
34	29.59	27.99	20.32
40	33.40	31.80	24.13
80	58.80	57.20	49.53
100	71.50	69.90	62.23

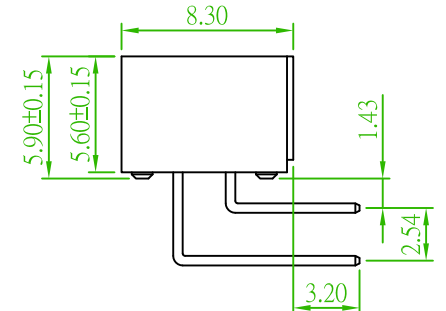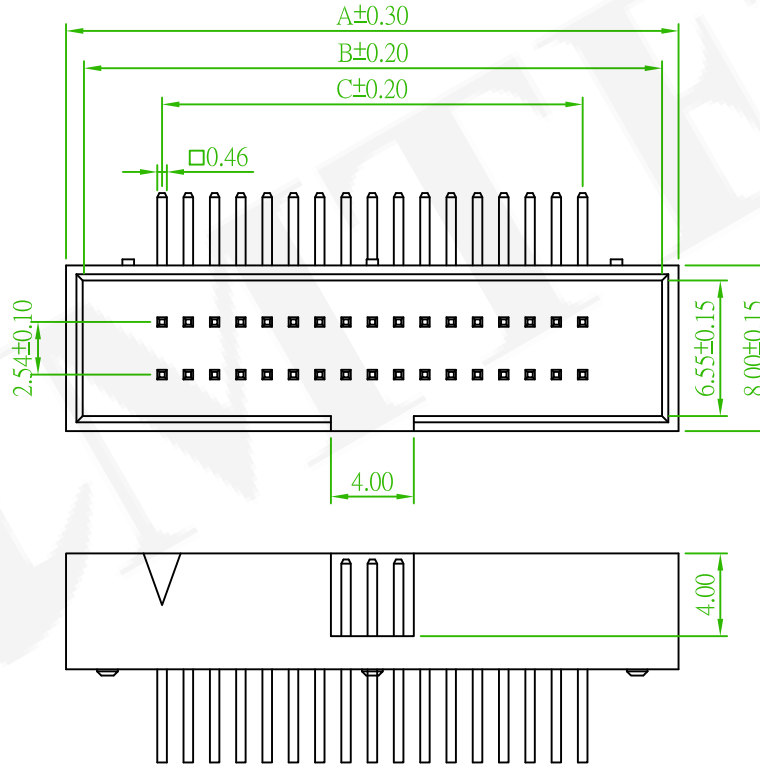

Old Part No.:BH4R-XX-U

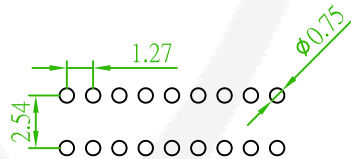

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	BOX HEADER 1.27x2.54mm 90°			頁數 Page	1/1
	品號 PART NO.	5BH4RDA57-XXXXX5XU-00			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	John	
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	John	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION