

ORDER INFORMATION

SPECIFICATION



Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40 °C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

5 B H 4 S D A 5 7 - X X X X 5 X U - 0 0

No. of contacts	G0:Gold Flash	S0:Selective Au	5:W/O peg & W/O ejector	A:Tray W/O Cap T:Tube W/O Cap H:T/R W/O Cap	RoHS
	GA:5u"	SA:5u"			
	GB:10u"	SB:10u"			
	GC:20u"	SC:20u"			
	GD:30u"	SD:30u"			
	T0:Tin Plated				
	TE:Tin 200u"				

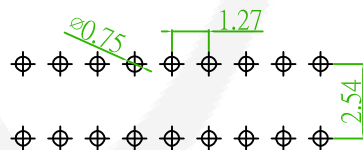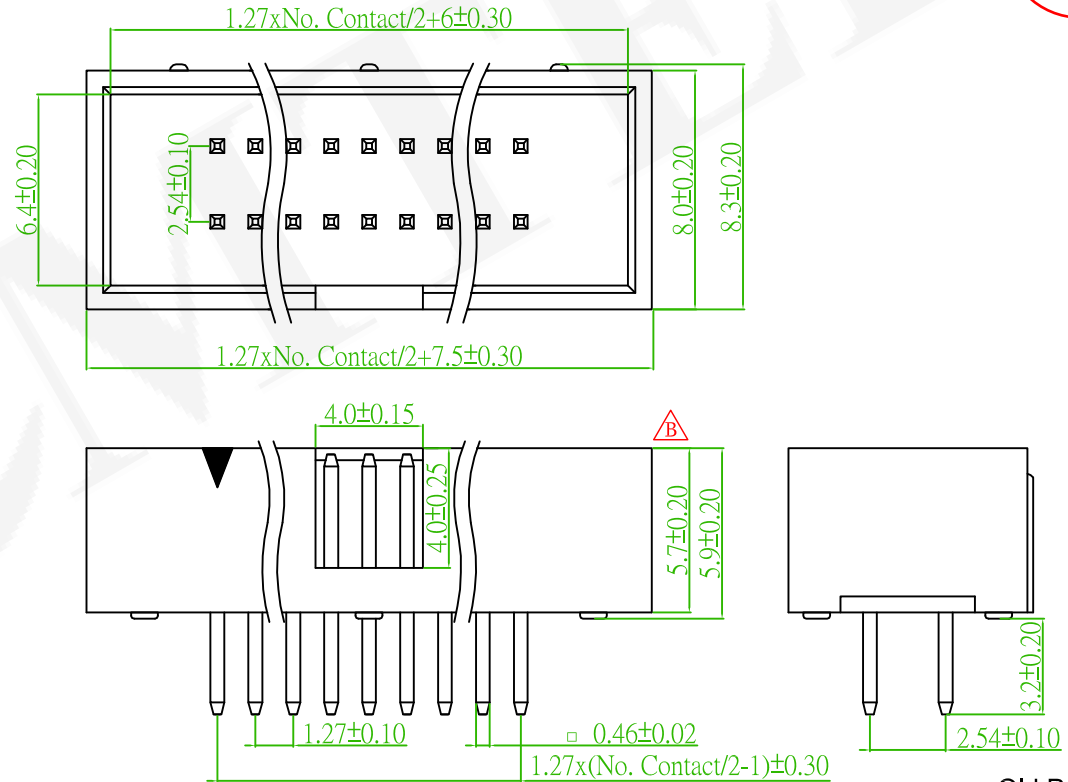

Recommended PCB Layout
 (PCB TOLERANCE ± 0.1)

Old P/N: BH4S-XX-U

REV.	QCX3	QCX NO. : 190911, revise the Plastic height56->57	Benson	2019/09/25
		ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	BOX HEADER 1.27x2.54mm 180°			頁數 Page	1/1
品號 PART NO.	5BH4SDA57-XXXX5XU-00 Δ B			繪圖 DRAWN	Gary 2017/05/22
圖號 DRAWING NO.	GN016-GA410	版本 REV.	B	核對 CHECKED	Jerry 2017/05/22
客戶品號 CUSTOMER P/N		比例 SCALE	4 : 1	承認 APPROVED	Aaron 2017/05/22
公差 TOLERANCE	.X \pm 0.30 .XX \pm 0.20	X° \pm 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION