

ORDER INFORMATION

Current Rating: 0.75 AMP

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 20mΩ Max.







Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

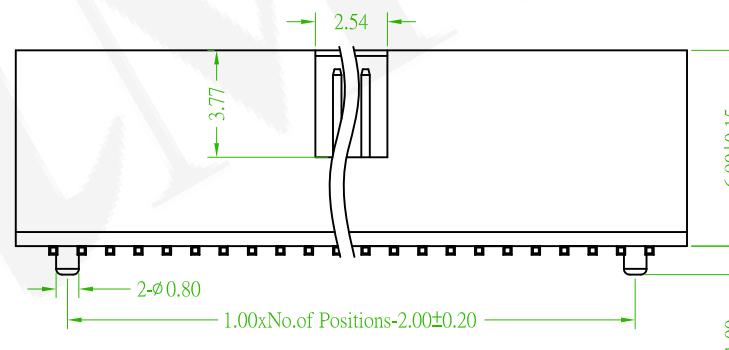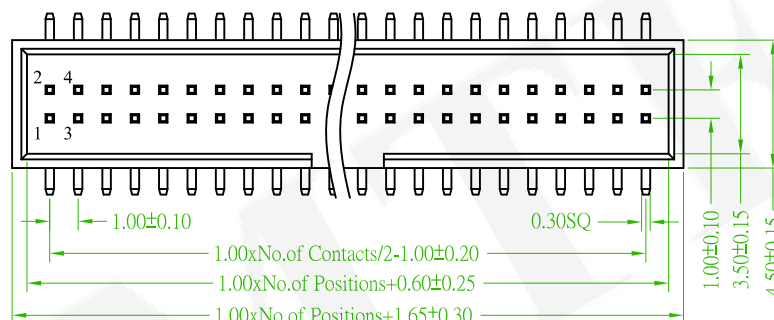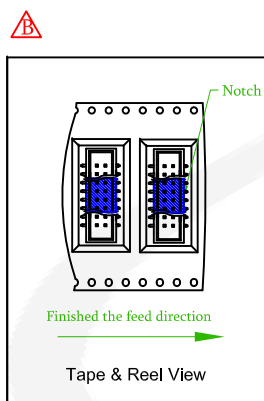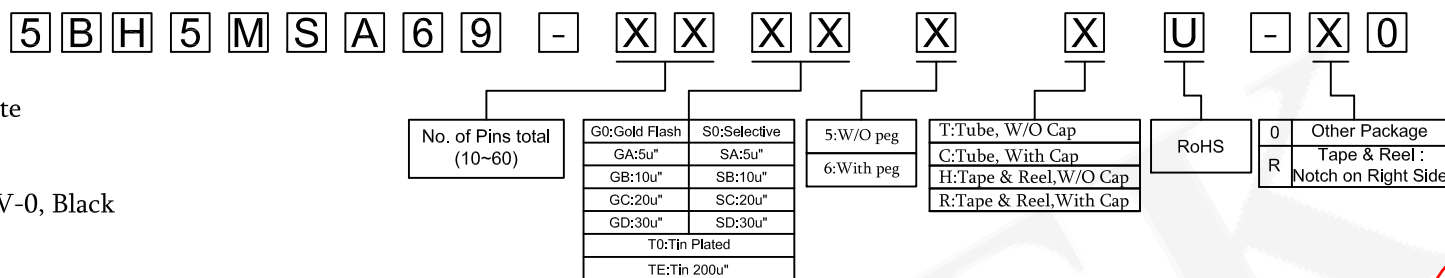


With peg

W/O peg

SECTION A-A

Old Part No.:BH5M69-XX-U

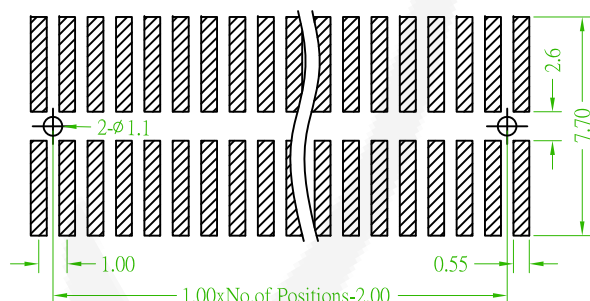

Recommended PCB Layout
(PCB BOARD TOLERANCE $\pm$ 0.1)

	Add the Tape & Reel View	Roy	2018/04/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	1.0mm BOX HEADER V/T SMT TYPE					頁數 Page	1/1
品號 PART NO.	5BH5MSA69-XXXXXXU-X0				繪圖 DRAWN	Jeff	2015/08/31
圖號 DRAWING NO.	GN003-RR379		版本 REV.	B	核對 CHECKED	Josh	2018/04/03
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason	2018/04/03
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION		