

**SPECIFICATION**




Current Rating: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute ©:Standard Recommend  
 Operation Temperature: -40°C to +105°C

**MATERIAL**

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

**ORDER INFORMATION**

5 B P 3 R D A 2 5 - X X X X 5 X U - 0 0

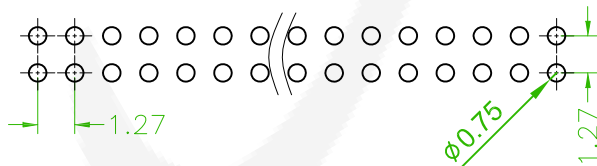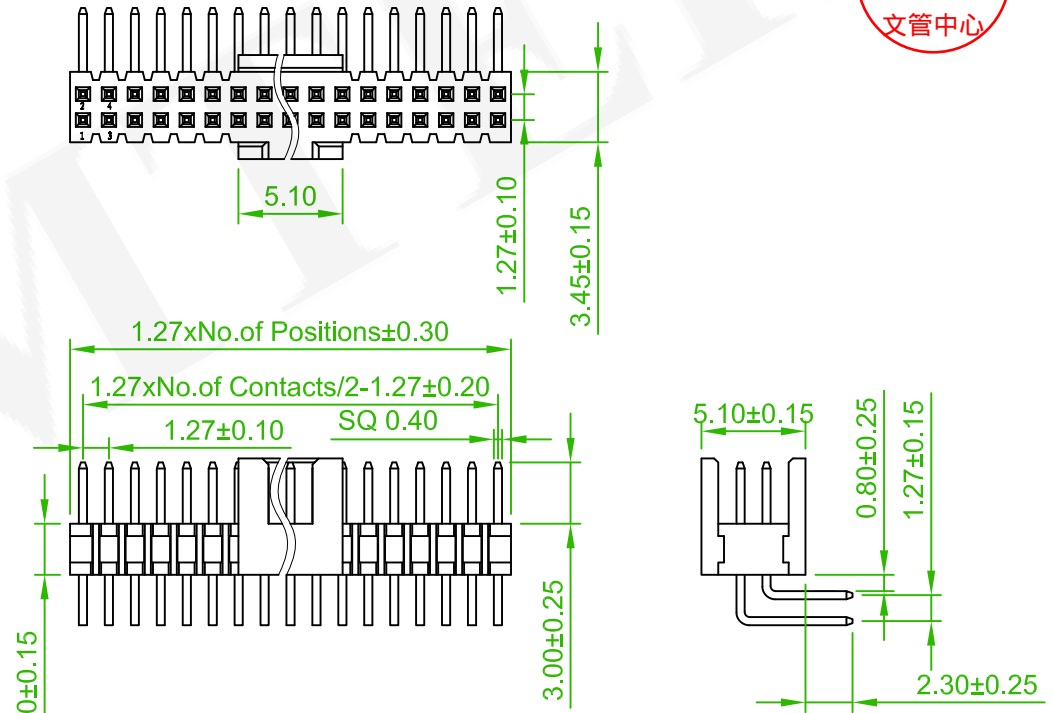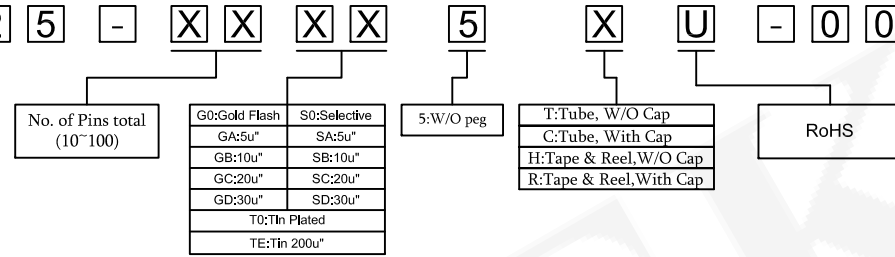

Old Part No.:BPH3R-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 1.27x1.27mm			頁數 Page	1/1
	品號 PART NO.	5BP3RDA25-XXXX5XU-00			繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/08/31
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	