

SPECIFICATION

Current Rating: 1 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute ©:Standard Recommend

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 B P 3 S D A 2 5 - X X X X 5 X U - 0 0



No. of Pins total
(10,14,16,20,24,
26,30,32,34,40,
44,50,60,64,80,
100)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap

RoHS

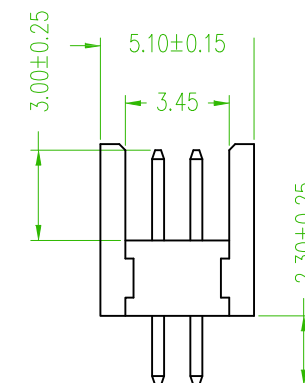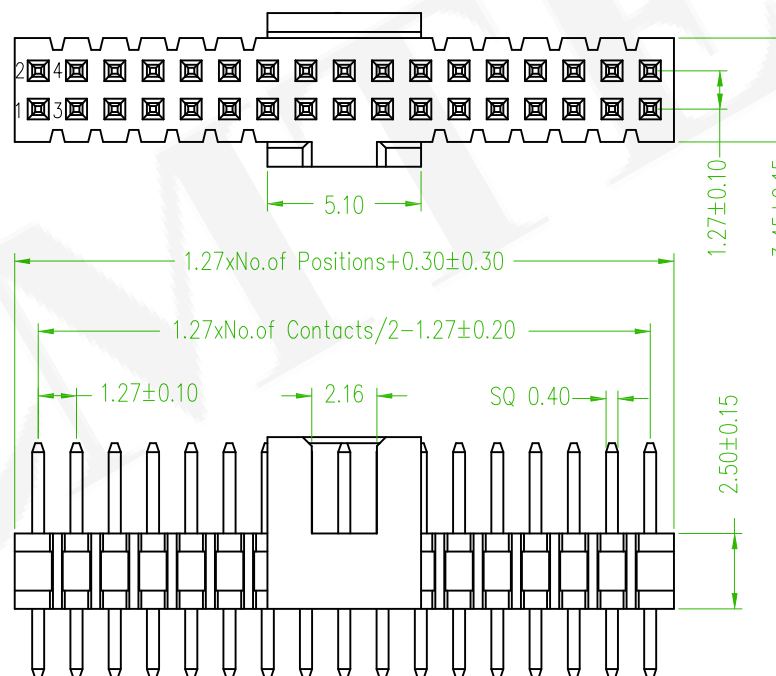

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.:BPH3S-XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 1.27x1.27mm				頁數 Page	1/1
	品號 PART NO.	5BP3SDA25-XXXX5XU-00				繪圖 DRAWN	Jeff 2015/08/31
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	