

Current Rating:3.0AMP
Insulation Resistance: 1000MΩ Min. at DC 500V
Dielectric Withstanding Voltage: 1000V AC/minute
Contact Resistance: 30mΩ Max. at DC 100mA
Temperature Range: -40°C to +105°C


Material: P.B.T , UL94V-0
Terminal: Phosphor Bronze

5 D I N I L 3 C N F - 6 4 S 0 W A B 0 1

3: Triple Row Pitch / Row See Table 1 N: W/O Lock F: Female Pin No. See Table 1 S0: Selective
SF: Selective 15u"
SD: Selective 30u" W: Natural A: Tray



Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrage
5DINIL3CNF-64 ***	64	2.54	A - C	

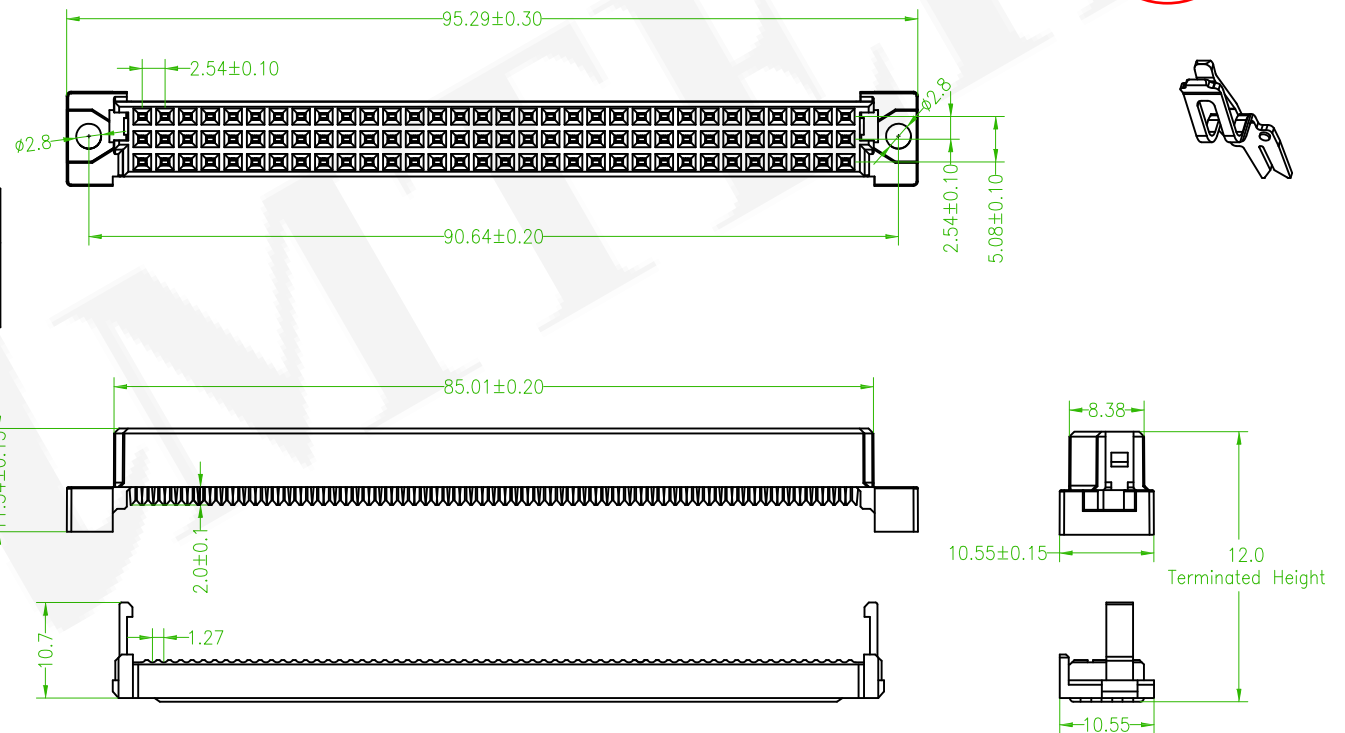

	Revise the Table 1	Roy	2018/05/08
	Revise the P/N:5DINIL3ANF-96S0WAB01->5DINIL3CNF-64S0WAB01	Roy	2016/11/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DIN 41612 3-R IDC TYPE				頁數 Page	1/1
品號 PART NO.	 5DINIL3CNF-64S0WAB01			繪圖 DRAWN	Jeff 2015/09/16	
圖號 DRAWING NO.	GN087-RR453	版本 REV.	C	核對 CHECKED	Josh 2018/05/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/08	
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		