



SPECIFICATION

Current Rating:3.0AMP
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1000V AC for one minute
 Contact Resistance: 30mΩ Max.
 Temperature Range: -40°C to +105°C

MATERIAL

Material: P.B.T , UL94V-0
 Contact: Phosphor Bronze

ORDER INFORMATION

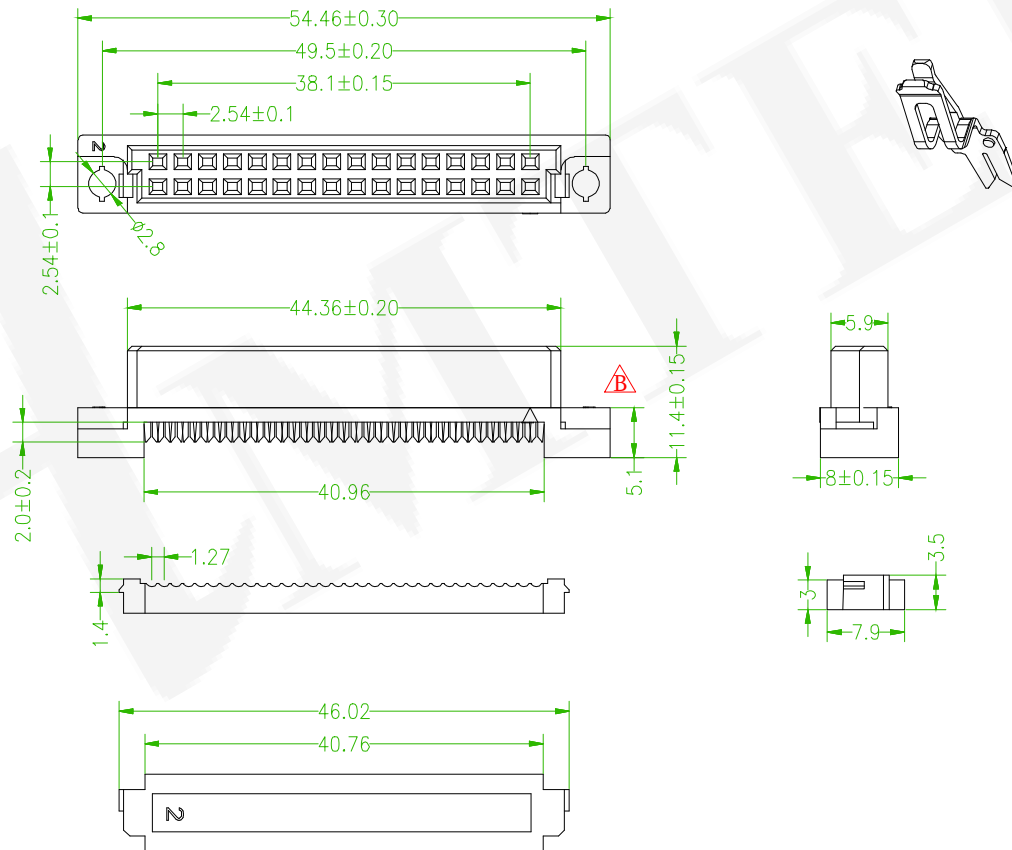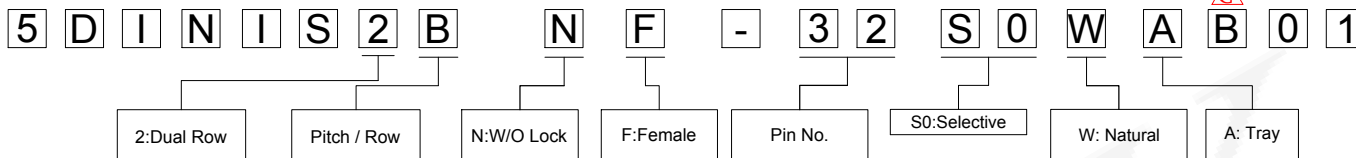

| | | | | | | |
|----------------------|---------------------------|-------------|------|---------------------------|----------------------|-----|
| 品名 TITLE | DIN 41612 IDC TYPE FEMALE | | | | 頁數 Page | 1/1 |
| 品號 PART NO. | △ 5DINIS2BNF-32S0WAB01 | | | 繪圖 DRAWN | Benson 2020/05/04 | |
| 圖號 DRAWING NO. | GN046-BN070 | 版本 REV. | C | 核對 CHECKED | Josh 2020/05/04 | |
| 客戶品號 CUSTOMER P/N | | 比例 SCALE | None | 承認 APPROVED | Josh 2020/05/04 | |
| 公差 TOLERANCE | .X ±0.20 .XX ±0.10 | 單位 UNIT | mm | THIRD ANGLE PROJECTION | | |

| | | | |
|------|------------------------------------|---------|------------|
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
| △x2 | QEC NO.:200705 Revise the drawing | Alice | 2020/07/15 |
| △x1 | QEC NO.: 200507 Revise the Drawing | Benson | 2020/05/21 |