


SPECIFICATION

Current Rating:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL





Insulator:PBT, UL94V-0
 Contact Pin:Copper Alloy

ORDER INFORMATION

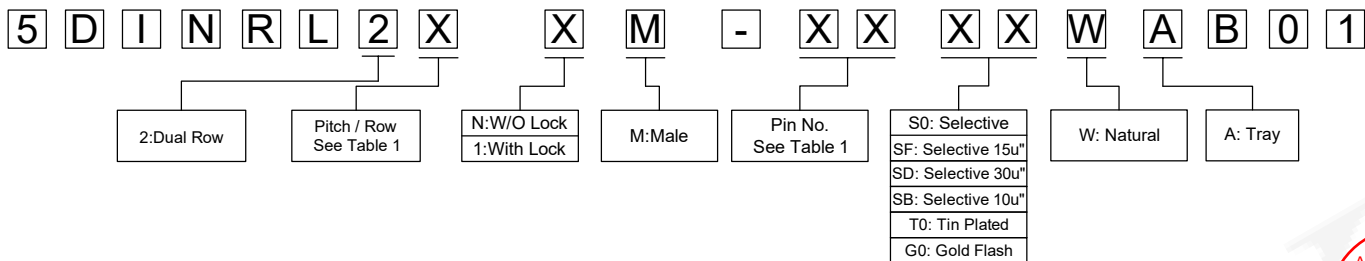

△ △ Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRL2BXM-64***	64	2.54	A B	
5DINRL2DXM-32***	32		A -	
5DINRL2FXM-32***	32	5.08	A B	
5DINRL2HXM-16***	16		A -	

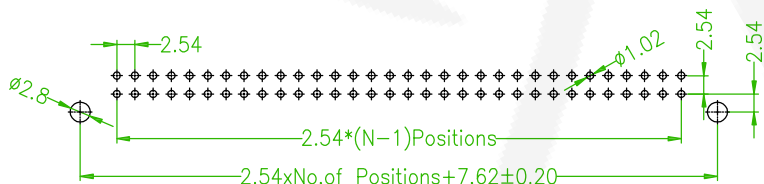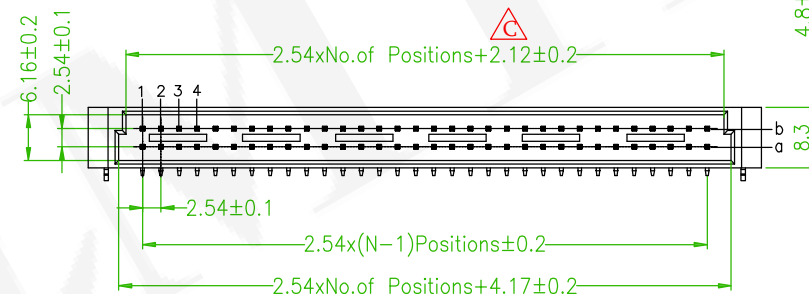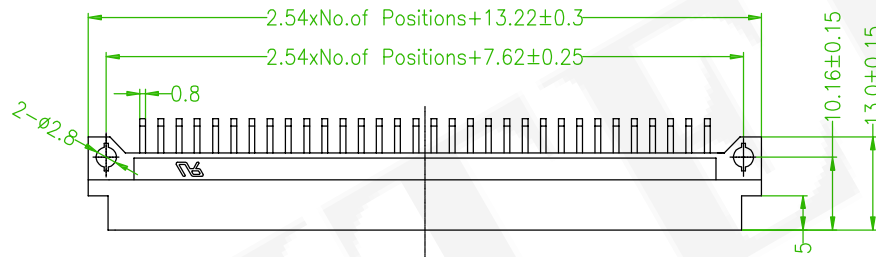

△ Recommended PCB Layout (PCB TOLERANCE ±0.05)

Old P/N:DINLR-M2XXX-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	DIN 41612 2-R R/A DIP TYPE			頁數 Page	1/1	
	品號 PART NO.	5DINRL2XXM-XXXXWAB01		繪圖 DRAWN	Roy 2016/10/11		
	圖號 DRAWING NO.	GN087-RR456	版本 REV.	C	核對 CHECKED	Josh 2018/05/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/08	
	公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x6	QEC NO.: 220107 Revise the Table & Drawing	Benson	2022/01/19
△x1	Revise the Table 1	Roy	2018/05/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE