

SPECIFICATIONS

Rated Current:2.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

ORDER INFORMATION




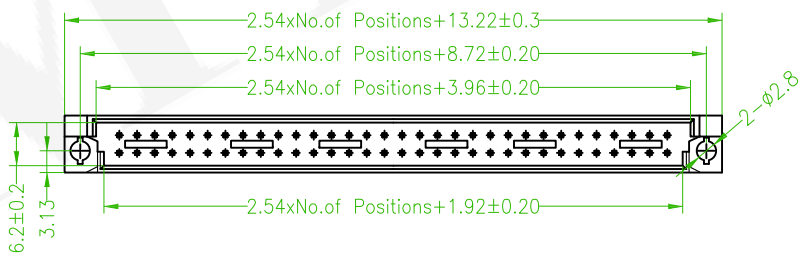


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSL2BXM-64 ***	64	2.54	A B	
5DINSL2FXM-32 ***	32	5.08	A B	

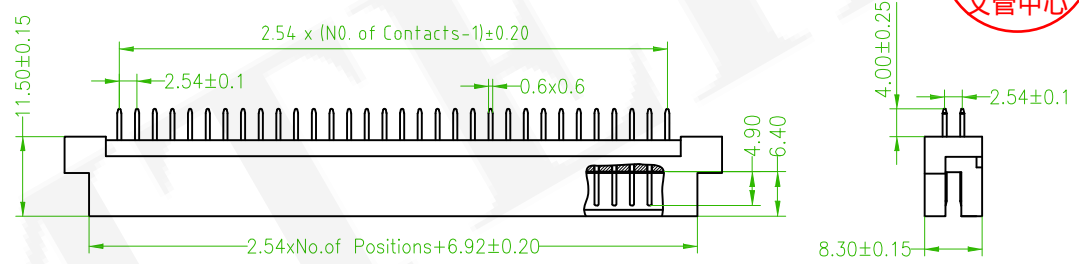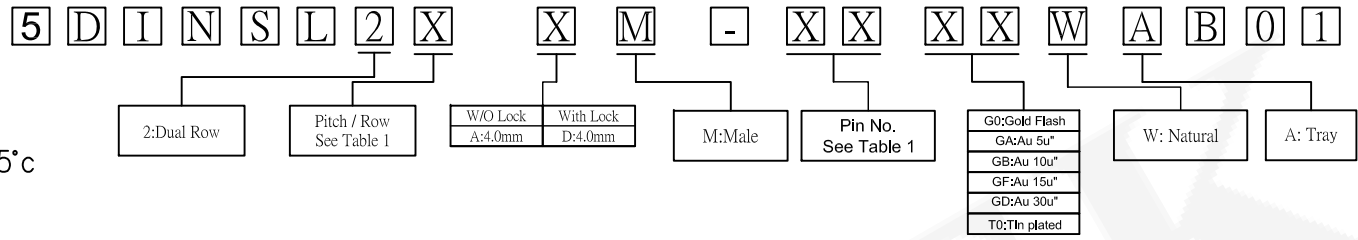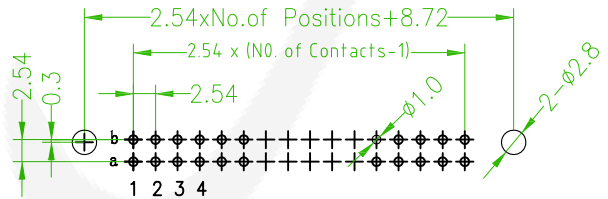

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Old Part No.:DINLS-M2XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A1	Revise the Table 1	Roy	2018/05/10

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	DIN 41612 2-R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5DINSL2XXM-XXXXWAB01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN087-RR463		版本 REV.	B	核對 CHECKED	Josh 2018/05/10
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/05/10
公差 TOLERANCE	.X ±0.30	.XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	