

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION


5EH1MSDNN - XX XX X X U - 0 0

No. of Pins total	G0:Gold Flash S0:Selective T0:Tin Plated	1:W/O peg & long ejector 3:W/O peg & short ejector 5:W/O peg & W/O ejector	A:Tray T:Tube C:Tube With Cap P:Tray With Cap R:T/R With Cap	RoHS
-------------------	--	--	--	------


AMTEK 耀德

2023.11.24


Released DCC




Short ejector




Long ejector

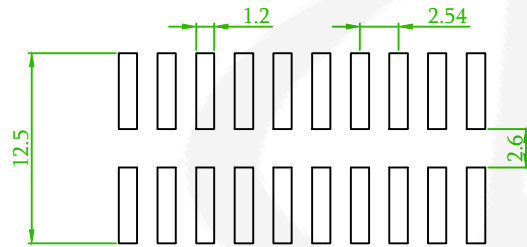


Recommended PCB Layout
(PCB TOLERANCE ± 0.05)




(6. 8. 10.
14. 16 PIN)





(18. 20. 24. 26.
30. 34. 40. 50 PIN)



(60. 64 PIN)

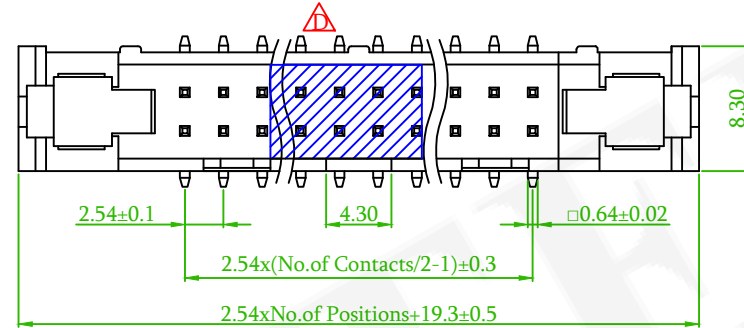

	6-20P	0.15mm
	24-40P	0.20mm
	50-64P	0.30mm

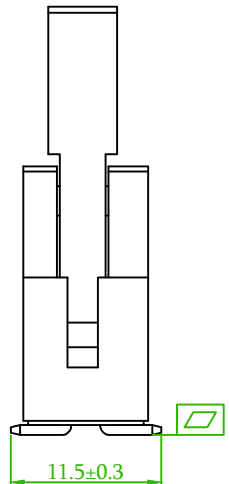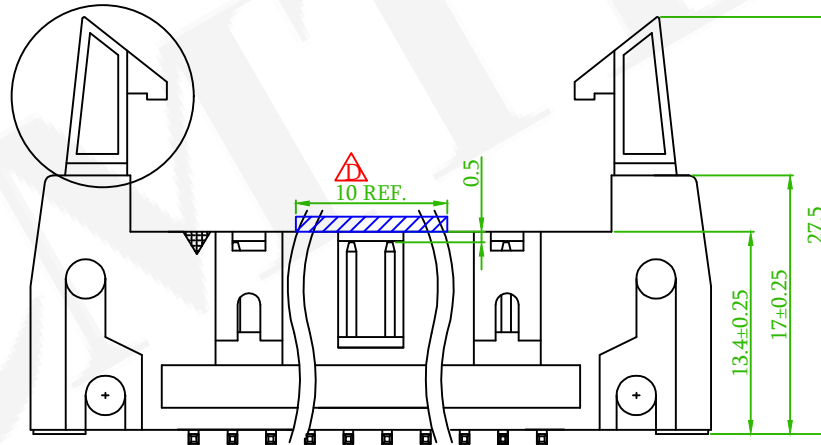

	ECN NO.:231003 Revise the drawing	Alice	2023/10/23
	Add: R:T/R With Cap	David	2020/08/03
	Add P:Tray With Cap	Alice	2020/07/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5EH1MSDNN-XXXXXXU-00 				繪圖 DRAWN	Roy 2016/03/16
圖號 DRAWING NO.	GN110-JF190	版本 REV.	H	核對 CHECKED	Josh 2019/02/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/20	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X° $\pm 5^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION	