

MATERIAL 

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5EH2ESANN - XX XX X X X U - 0 0

No. of contacts
(10,14,16,20,26,30,34,
40,50,60,64)


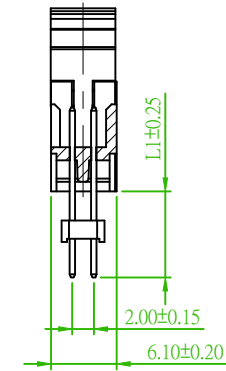
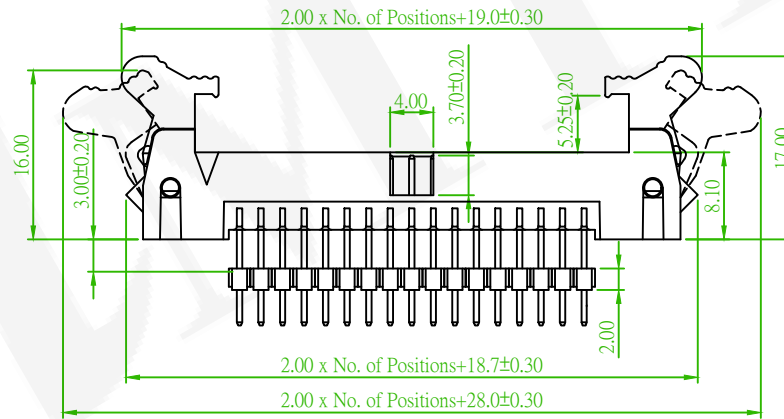
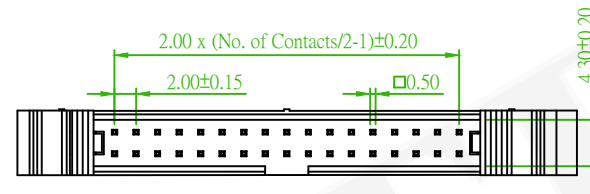
G0:Gold Flash	S0>Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

3:W/O peg & short ejector

RoHS



A:Tray, W/O Cap


T:Tube, W/O Cap



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:EDH2ES-XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EJECTOR HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5EH2ESANN-XXXXXXU-00				繪圖 DRAWN	Jeff 2015/09/04
	圖號 DRAWING NO.	GN003-JS024	版本 REV.	B	核對 CHECKED	John 2015/09/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230937 Revise the drawing	Alice	2023/10/23