

MATERIAL ⚠

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5EH2MSDNN-XXXXU-00

⚠

No. of contacts
(06.10.12.14.16
.20.24.26.30.34
.40.44.50.60.64)

G0:Gold Flash

GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated
TE:Tin 200u"

S0:Selective

SA:5u"
SB:10u"
SC:20u"
SD:30u"

X

1:W/O peg & Long ejector
3:W/O peg & short ejector


X

T:Tube, W/O Cap
R:T/R, With Cap ⚠


U

RoHS





AMTEK 耀德
2023.11.15
Released DCC



Short Ejector
(L=16.9)



Long Ejector
(L=20.6)

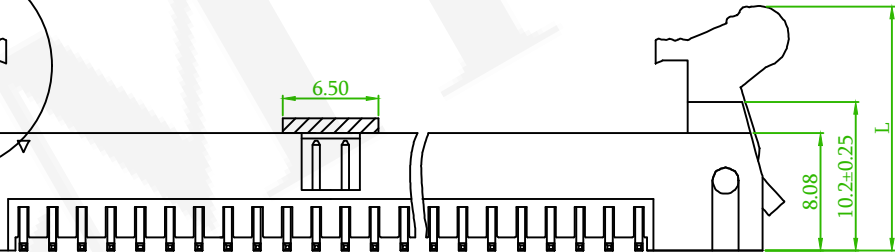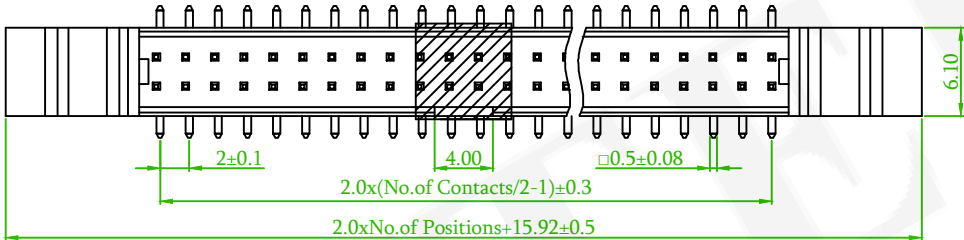

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:EDH2M-XX-1-U

⚠	ECN NO.:230937 Revise the drawing	Alice	2023/10/23
⚠	Add the Packaging option	Nick	2019/04/25
⚠	Add the Contacts Option:06, 24, 60, 64	Roy	2017/09/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	EJECTOR HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5EH2MSDNN-XXXXXXU-00				繪圖 DRAWN	Jeff 2016/04/26
	圖號 DRAWING NO.	GN110-RL398	版本 REV.	F	核對 CHECKED	John 2016/04/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/26	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	